




Daikin UK Product Catalogue

1st April 2010

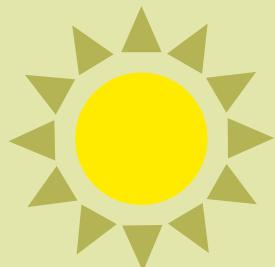

your comfort. **our world.**

FOREWORD



DAIKIN – the leader in manufacturing quality and customer service

Daikin was founded in 1924 in Osaka, Japan. The company we now know as Daikin Industries Ltd (DIL) is the parent company of Daikin Europe N.V. (DENV) which was established in Ostend, Belgium in 1972.

Daikin Europe is continuously updating and expanding its manufacturing facilities, to a point where they are now acknowledged as the most advanced in their field in Europe. This is backed by zero defect production, efficient supply chain management and unrivalled research and development support from DIL.

These substantial production facilities are underpinned by a network of wholly owned affiliate companies in the UK, France, Germany, Italy, Spain, Portugal, Poland, Greece, Belgium, Holland and Central Europe. There are also numerous independent distributors throughout Europe, Africa and the Middle East.

With more than 50 years experience in the production of heat pumps now manufacturing over a million units a year, Daikin has been at the forefront of the drive for energy efficient heat pump technology. The systems are manufactured entirely 'in-house' in Daikin's state of the art factories – this includes the all important energy efficient inverter driven compressor unit.

As one of many wholly owned affiliate companies, Daikin UK is a leading supplier of heating, cooling and refrigeration solutions for commercial, residential and industrial applications. Our product portfolio comprises a wide range of highly energy efficient climate control systems which provides the public and private sectors with the right product for any application and requirement.

- State of the art direct expansion air conditioning
- Heat pump residential and light commercial heating, domestic hot water and cooling
- Applied central cooling and heating
- Medium to low temperature refrigeration.

RESPECT FOR THE ENVIRONMENT

Daikin has an enviable record in concern for environmental issues and applies it to all areas of the business, implementing and in many cases pre-empting, international and local environmental protective legislation.

This commitment is reflected in three areas:

1. Reducing waste in manufacturing and operations,
2. Recycling materials and equipment,
3. Designing and producing energy-efficient climate control equipment.

Reducing waste and recycling

At the Factory

- Wastewater is treated before being discharged into the city drainage system, with the recovered sludge being a useful ingredient in cement manufacturing.
- Other waste is also carefully sorted and recycled, supported by a continually evolving factory layout that encourages the optimum use of resources.
- Returnable packaging is invested in where possible
- ISO 9001 approved for quality management
- ISO 14001 approved for environmental management.

In the UK

- ISO 9001 approved for quality management
- ISO 14001 approved for environmental management
- All printed sales literature is made using recycled, FSC certified paper and printers.



Recycling Equipment

Daikin UK's unique recycling service takes this commitment to the environment one step further. Despite the WEEE directive 2002/96/EC not currently including fixed air conditioning, when installing Daikin equipment you can arrange for up to 95% of the redundant equipment to be reprocessed by an authorised WEEE recycler.

Once collected from site, the end of life air conditioning equipment will be transported to a recycling facility, where it is dismantled in such a way that any hazardous substances are destroyed or reprocessed. This service is available to all installers of Daikin equipment, regardless of the manufacturer of the redundant units.

Energy efficient climate control equipment

Our products reflect the concept of combining maximising energy efficiency with maximum respect for the environment. Their utilisation of heat pump technology for example, results in far lower energy consumption and in the case of heating, drastically lower CO₂ emissions are achievable than with fossil fuel burning systems. Also their incorporation of numerous detailed features such as inverter control, heat recovery, economy operating modes, movement sensors among others, enhance user comfort without compromise to either efficiency or the environment.



▲ Daikin UK, Weybridge Head Office

▼ Office locations

▼ Training Centre locations



London Head Office

Daikin Airconditioning UK Limited
The Heights, Brooklands,
Weybridge,
Surrey KT13 0NY
Tel 0845 6419300

Bristol Office

Daikin Airconditioning UK Limited
Maple House, Brotherswood Court,
Great Park Road, Almondsbury,
Bristol BS32 4QW
Tel 0845 6419320

Birmingham Office

Daikin Airconditioning UK Limited
Unit 8, Holly Park, Spitfire Road,
Birmingham, West Midlands B24 9PB
Tel 0845 6419370

Manchester Office

Daikin Airconditioning UK Limited
Quay Plaza, Unit G35,
Salford Quays,
Manchester M50 3AG
Tel 0845 6419340

Glasgow Office


Daikin Airconditioning UK Limited
Unit 2, Glasgow Airport Business Park,
Marchburn Drive, Paisley PA3 2SJ
Tel 0845 6419330

TABLE OF CONTENTS

Energy Labelling	4	Ventilation	
HEATING		HRV - Heat reclaim ventilation	162
Daikin Altherma Split	7	Outdoor air processing unit	164
Daikin Altherma Monobloc	12	Air Handling applications	166
Daikin Altherma HT	14		
Daikin Solar Systems	16	Control Systems	
Daikin Heat Pump Convector	18	Individual control systems	180
REFRIGERATION		Centralised control systems	181
Conveni-pack	21	Network Solutions	182
Zeas	25		
AIR CONDITIONING		APPLIED SYSTEMS	
Residential & Commercial		Air-cooled	193
Wall mounted units	28	Water-cooled	214
Flexi type units	38	Condenserless Chiller	225
Floor standing units	40	D.I.C.N. (Daikin Integrated Chiller Network)	229
Concealed ceiling units	44	EHMC	230
Cassette units	54		
4-Way blow ceiling suspended cassette	63	FAN COIL UNITS	
Ceiling suspended units	64	FWB	232
Rooftop	69	FWD, FWV, FWM, FWL	233
Air Curtain		FWT, FWC, FWF	234
Connection to Sky Air Inverters	70		
Commercial Multi System		AIR PURIFIERS	
Commercial Multi System (CMS)	74	Ururu air purifier	235
Twin, Triple, Double Twin & Multi Application		Photocatalytic air purifier	236
Twin, Triple, Double Twin applications	83		
Multi model applications	89	OTHER	
VRV®		Power Supply	237
VRV®III-Q air-cooled outdoor units	127	Measuring Conditions	237
VRV®III air-cooled outdoor units	132		
VRV®-WII water-cooled outdoor units	140		
Indoor units	144		
Hot Water Module	159		

ENERGY LABELLING

Energy labelling is part of a wider European Climate Change program that targets energy efficiency as one method of reducing CO₂ emissions in order to meet the targets of the Kyoto protocol. By this means the European Commission hopes that improved awareness will result in customers purchasing the most economical (ecological) answer to their needs.

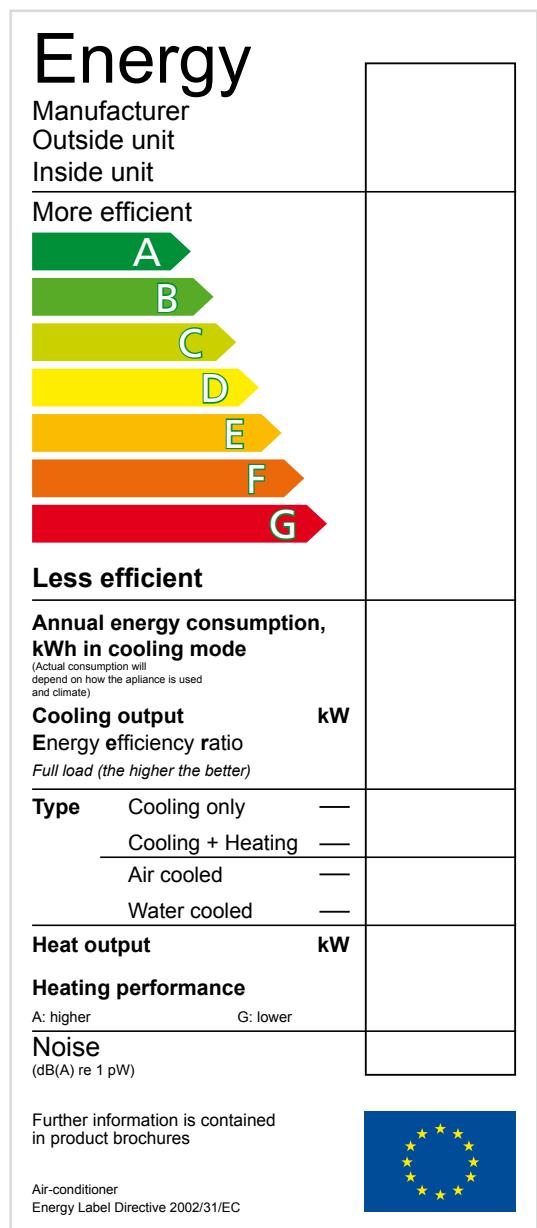

What?

The energy label provides information on the energy consumption of the unit. Air conditioning units (with cooling capacity 12kW) are classified in seven different categories (A to G), according to their energy consumption and color coded according to the category to which they belong. The most energy efficient units will be included in the A category, indicated by a green arrow on the label – less efficient units will belong in G class, indicated by a red arrow on the label. The end user can easily compare the efficiency of equal types of units from different brands.

The label?

What is mentioned on the label?

Logo and name of manufacturer; name of indoor and outdoor unit (*)

Energy efficiency class of the unit in cooling mode:

A	EER > 3.20
B	3.20 ≥ EER > 3.00
C	3.00 ≥ EER > 2.80
D	2.80 ≥ EER > 2.60
E	2.60 ≥ EER > 2.40
F	2.40 ≥ EER > 2.20
G	2.20 ≥ EER

Indicated annual energy consumption

This figure indicates the approximate amount of energy consumed per year by the unit, based on a standard household model. The annual consumption is calculated by multiplying the total power input by an average of 500 hr per year IN COOLING MODE AT FULL LOAD.

In order to calculate the cost of annual energy consumption, you merely multiply this figure by your electricity tariff.

Cooling output

Cooling output is defined as the cooling capacity in kW of the appliance, operating in cooling mode at full load. It is important to choose an air conditioning unit with a rated output sufficient for your cooling/heating requirements. An oversized unit can result in frequent on/off cycling, which shortens its service life - an undersized unit will not provide adequate cooling/heating. To determine the appropriate output, contact the manufacturer or your local dealer/installer.

Energy Efficiency Ratio (EER)

This is the cooling output of the unit divided by the amount of electricity the unit requires to deliver it (total power input). In other words, the higher the EER, the greater the energy efficiency.

Type

TYPE OF UNIT: it indicates if the unit is a cooling only or cooling/heating system

COOLING MODE: it indicates if the unit is air cooled or water cooled

Heating output

Heating output is defined as the heating capacity in kW of the appliance, operating in heating mode at full load.

Energy efficiency class of the unit in heating mode:

A	COP > 3.60
B	3.60 ≥ COP > 3.40
C	3.40 ≥ COP > 3.20
D	3.20 ≥ COP > 2.80
E	2.80 ≥ COP > 2.60
F	2.60 ≥ COP > 2.40
G	2.40 ≥ COP

Noise level: only for portable units.

(*): For multi-models Daikin chooses only to mention 1 outdoor unit with a maximum of 2 indoor units (wall mounted type) - for other units we refer to the multi brochure.






Daikin Altherma Split

Air Source Heat Pump

DAIKIN ALTHERMA... Tomorrow's Solution Today!

Daikin Altherma is safe, reliable, highly efficient and a true low carbon, low cost solution for home heating and hot water. Daikin Altherma heats up to 5 times more efficiently than a traditional heating system based on fossil fuels or electricity. By making use of the heat in the outside air it uses much less energy, whilst still providing year round comfort.

Daikin Altherma is a split system consisting of an outdoor unit and an indoor hydro-box that can be connected to all standard low temperature radiators and underfloor heating systems. As maintenance requirements are minimal, running costs are low. Inverter technology means energy savings are even greater.

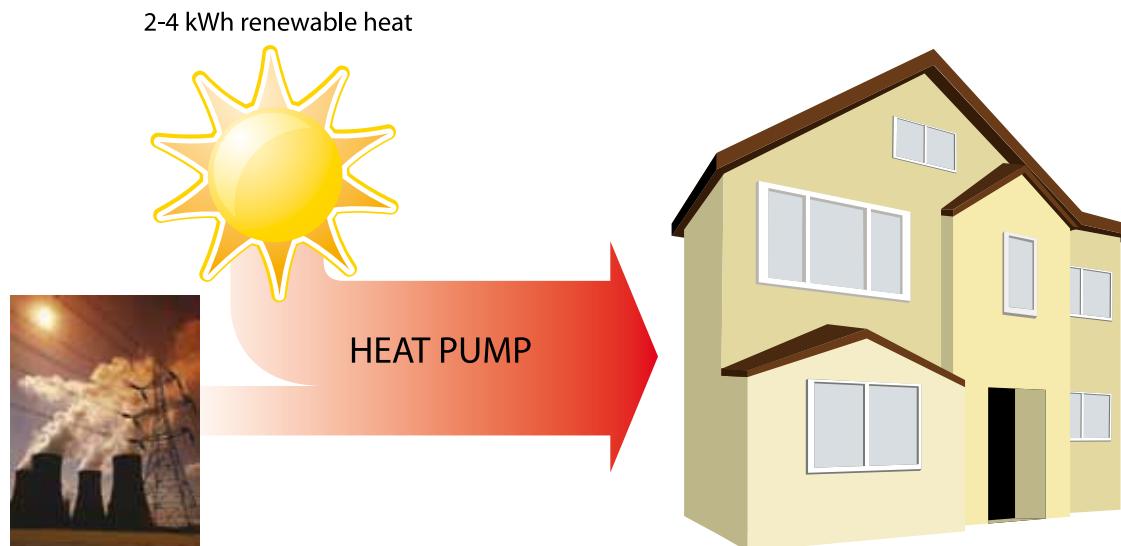

COP (Coefficient of Performance)

The COP is defined as the ratio of output energy in Kilo Watts (kW) and the input energy Kilo Watts (kW). The higher the COP is, the more efficient the system. The Daikin Altherma heat pump boiler has a COP of 3 to 5, which means that the pump delivers 3 to 5 times more energy than it uses. From 1 kilowatt of electricity Daikin Altherma produces 3 to 5 kilowatts of available heat.

Minimal installation cost

Daikin Altherma takes heat from the air. No digging or excavation works are required. Both the outdoor and indoor units are compact. The external unit can be located easily outside any building, including apartments. Without flames or fumes, there is no need for a chimney or constant ventilation in the room, where Daikin Altherma's indoor unit is installed.

Flexible configurations

Daikin Altherma can be configured for use in both new and refurbishment applications and connects to standard low temperature radiators, under floor heating or fan coil units. If you already have a heating system, you don't need to change everything.

Complete comfort for the family

Daikin Altherma not only satisfies heating and domestic hot water requirements, it also comes with a cooling option.

Absolutely safe

Daikin Altherma doesn't need oil, gas or other hazardous substances. Moreover, you don't need a gas connection or a fuel tank. No risk of intoxication, smell or pollution from leaking tanks.

HOW THE SYSTEM WORKS

1 The heat pump extracts heat from the outside air

Daikin Altherma uses a natural, renewable source of energy... air.


The outdoor unit derives heat from the surrounding air and raises its temperature until it is high enough to heat a home. This heat is then transmitted to the indoor unit through heat transfer fluid.

The compact outdoor unit is easily installed and can also be used in properties without a garden.

2 The system raises this heat to a higher temperature

The indoor hydrobox unit heats the water that circulates through your radiators, floor heating systems or fan coil units and provides you with domestic hot water.

If the user opts for the combination of heating and cooling, then the indoor unit can also decrease the water temperature to distribute a refreshing coolness.

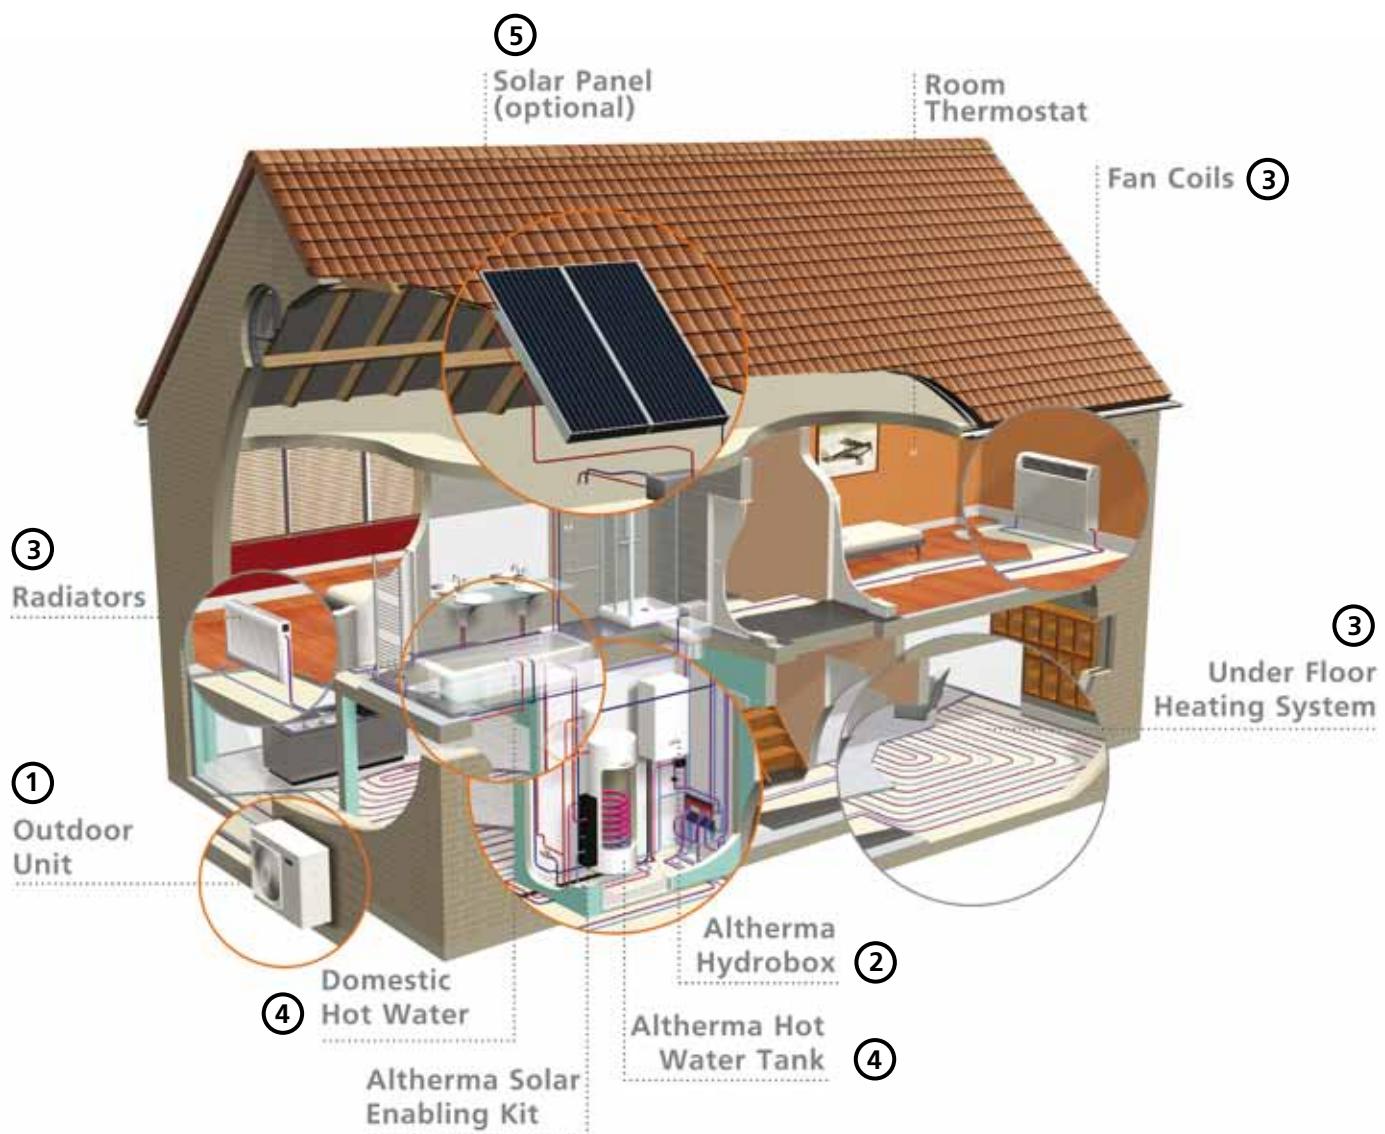

3

This heat is then distributed throughout the home via heating units...

Underfloor heating

Underfloor heating is possibly the best solution for new installations. It provides the following benefits:

- Maximum comfort due to radiated heat
- Maximum efficiency compared to other heat emitters
- Unobtrusive i.e. no wall space required
- Water flow temperatures typically 35 to 40°C.
- Seasonal COP typically 3.5 to 4.5

Radiators

Traditionally used as the costs are relatively inexpensive compared to other systems. The main benefits for the radiator system are:

- Traditional heating solution
- Low capital cost
- Water temp typically 50°C with heat pumps (radiators must be sized accordingly)
- Seasonal COP with weather compensation typically 3.0 to 3.5

Fan coils

These systems are more diverse in that they can provide both heating and cooling if required. Benefits include:

- Able to heat and cool
- Cased or concealed units
- Individual control
- Water flow temperatures typically 35C heating 7C for cooling option
- Seasonal COP heating typically 3.5 to 4.5

4

...and to the bath, shower and sinks

A purpose built stainless steel water cylinder, constructed to maintain the highest levels of energy efficiency, is available to meet domestic hot water needs. The combination of an electric booster heater in the upper part of the tank and a heat pump exchanger in the lower part ensures the lowest possible energy consumption with rapid water heating. In addition, a built in function raises the water temperature to 70°C or higher at least once a week to remove any possibility of legionella growth.

5

Optional Solar Kit

The Daikin Altherma System can be perfectly combined with solar collectors to produce hot water. The sun provides 30 to 70% of the energy required for our hot water needs. Daikin Altherma, your total solution, thinks of the future.



DAIKIN ALTHERMA CONTROLS



Smart temperature regulator

The control system which operates Daikin Altherma is built into the casing of the indoor unit and is very simple to use. With this integrated control, it is possible to regulate the heating according to the needs of the user. It is easy to set up a full weekly programme and in this way, temperature is reduced automatically at night or during holidays and increased when the user gets up or returns home.

The system can also be combined with additional temperature regulating systems with separate thermostats for living rooms, bedrooms, etc.

Weather compensation

Whatever the temperature outside Daikin Altherma optimises the temperature inside. Daikin Altherma has weather compensation built into its integrated control system, allowing it to minimise energy input to achieve optimum temperature conditions. Compared to most systems Daikin Altherma will be more efficient and will cost less to use. Daikin Altherma has weather compensation built in as standard.



Room Thermostat

With the wired or wireless room thermostat, the ideal temperature can be easily, quickly and conveniently regulated. As an option to the wireless room thermostat, an external sensor (EKRTETS) can also be placed between the under floor heating and the floor. It allows for more precise measurement and can regulate the comfort level of your customer even more optimally and energy efficiently.

EKRTW: wired wall-mounting room thermostat

EKTRR: wireless room thermostat.



EKHBH(X)-A*

INDOOR UNIT (HYDRO BOX)					
		EKHBH008B***	EKHBX008B***	EKHBH016B***	EKHBX016B***
Function		Heating only	Reversible	Heating only	Reversible
To use with		ERHQ006-008B**		ERHQ011-016B**	
Dimensions	HxWxD mm	922x502x361	922x502x361	922x502x361	922x502x361
Leaving Water	heating °C	15~50		15~55	
Temperature Range	cooling °C	-	5~22	-	5 - 22
Drain valve		Yes			
Material		Epoxy polyester painted galvanized steel			
Colour		RAL 9010 (neutral white)			

*** Hydro Box with Factory Mounted Electric Heater

FACTORY MOUNTED ELECTRIC HEATER		
	Power supply	Capacity steps
Heating Only		
EKHBH008B3V3	230V Single Phase	3kW 1 step
EKHBH008B6V3	230V Single Phase	6kW 2 step
EKHBH008B9WN	400V Three Phase and Neutral	9kW 2 step
Reversible		
EKHBX008B3V3	230V Single Phase	3kW 1 step
EKHBX008B6V3	230V Single Phase	6kW 2 step
EKHBX008B9WN	400V Three Phase and Neutral	9kW 2 step



ERHQ-AD

ERHQ-A

OUTDOOR UNIT			ERHQ006BV3	ERHQ007BV3	ERHQ008BV3	ERHQ011BV3	ERHQ014BV3	ERHQ016BV3	ERHQ011BW1	ERHQ014BW1	ERHQ016BW1
Dimensions	HxDxW	mm	735x825x300			1170x900x320			1345x900x320		
Nominal capacity	Heating	kW	5.75	6.84	8.43	11.2	14.0	16.0	11.32	14.5	16.05
	Cooling	kW	5.12	5.86	6.08	10.0	12.5	13.1	11.72	12.55	13.12
Nominal input	Heating	kW	1.26	1.58	2.08	2.46	3.17	3.83	2.54	3.33	3.73
	Cooling	kW	2.16	2.59	2.75	3.6	5.29	5.95	4.22	5	5.65
COP			4.56	4.33	4.05	4.55	4.42	4.18	4.46	4.35	4.3
EER			2.37	2.26	2.21	2.78	2.36	2.2	2.78	2.51	2.32
Operation range	Heating	°C	-20 ~ 25			-20 ~ 35			-20 ~ 35		
	Cooling	°C	10 ~ 43			10 ~ 46			10 ~ 46		
	Hot water	°C				-20 ~ 43					
Sound Pressure level	Heating	dBA	48	48	49	49	51	53	51	51	52
	Cooling	dBA	48	48	50	50	52	54	50	52	54
Weight	kg		56			103			108		
Refrigerant charge	R-410A	kg	1.7			3.7			2.95		
Power Supply			1 ~ /230V/50Hz			3 ~ /400V/50Hz					
Recommended fuses	A		20			32			20		

Nominal Capacity and Power Input based on the following conditions:

Heating Ambient 7 °CDB/6 °CWB / Leaving Water Temp. 35 °C (DT 5 °C)**Cooling** Ambient 35 °C / Leaving Water Temp. 7 °C (DT 5 °C)

OPTIONS		Hydro Box Heating Only EKHBH008 EKHBH016	Hydro Box Reversible EKHBX008 EKHBX016	Outdoor Unit ERHQ006-008	Outdoor Unit ERHQ011-016
EKBDP	Drain pan Kit for cooling operation below 18 °C				
EKR1HB	Option PCB for solar connection and remote alarm reporting	•	•		
EKBPH08B	Drain pan heater tape			•	
EKBPH16A	Drain pan heater tape				•

DOMESTIC HOT WATER CYLINDER		EKHWSU150B3V3	EKHWSU200B3V3	EKHWSU300B3V3
Unvented Systems (EKUHWB Kit also required - see below)				
Water Volume	l	150	200	300
Max Water Temperature	°C		85	
Booster Heater Capacity	kW		3	
Power Supply	ph/V/Hz	1/230/50		
Height	mm	1015	1265	1715
Diameter	mm		580	
Empty Weight	kg	38	46	60
Colour		Neutral White		
Material Inside Tank		Stainless Steel (DIN 1.452 1)		
Material Outside Casing		Epoxy-Coated Mild Steel		
Piping Connections (Diameter)	Water inlet H/E	inch	3/4"	
	Water outlet H/E	inch	3/4"	
	Cold Water in	inch	3/4"	
	Hot water out	inch	3/4"	



EKHWSU200B3V3

ACCESSORY KIT FOR UNVENTED SYSTEMS		Domestic Hot Water Tank EKHWSU-B3V3
EKUHWB	Includes: Combined Pressure Reducing Valve, Non Return Valve, Strainer, Expansion Relief Valve, Expansion Vessel, Tundish	•
EKUHW2WB	Separate 2 way valve (To use with EKUHWB for installations with Solar Kit)	•

SOLAR ENABLING KIT			EKSOLHWAV1
Dimensions	HxDxD	mm	770x305x207
Heat exchanger	Pressure drop	kPa	21.5
	Max. inlet temp	°C	110
	Capacity	W/K	1,400
Ambient temperature	Max.	°C	35
	Min.	°C	1
Power supply			1~/220-240V/50Hz
Power supply intake			indoor unit



Daikin Altherma Monobloc

Air Source Heat Pump


Outdoor unit and indoor unit in ONE!

In addition to the Daikin Altherma Split system, the Daikin Altherma Monobloc is a version with all hydraulic parts located within the outdoor unit.

In this Daikin Altherma system the water pipes, rather than refrigerant lines, run indoors from the outdoor unit making installation much quicker.

In order to protect the water pipes from freezing up during winter, insulation is provided for all hydraulic components and special software has been applied to activate the pump and back up heater if necessary. This prevents the water temperature from dropping below freezing point and obviates the need for the addition of glycol to the water pipes.

- H₂O piping between outdoor unit and indoor heating appliances
- Freeze protection of hydraulic parts
- Connectable to under floor heating, low temperature radiators and fan coil units, just like the standard Daikin Altherma system
- Domestic hot water cylinder with optional solar kit, perfectly combinable with solar collectors.

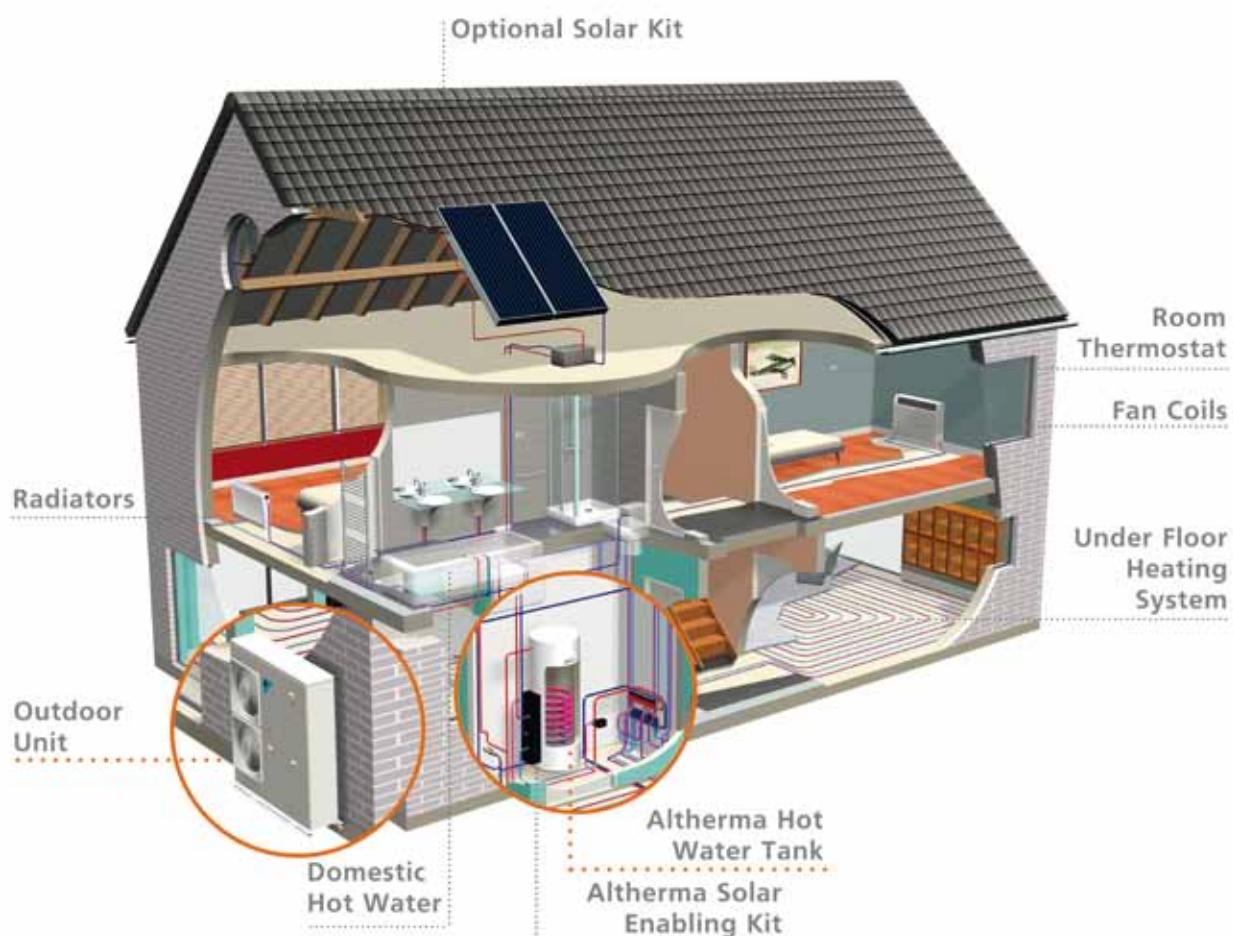

OUTDOOR UNIT			HEATING ONLY			REVERSIBLE		
SINGLE PHASE	With bottom plate heater		EDLQ011A6V3	EDLQ014A6V3	EDLQ016A6V3	EBLQ011A6V3	EBLQ014A6V3	EBLQ016A6V3
	Without bottom plate heater		EDHQ011A6V3	EDHQ014A6V3	EDHQ016A6V3	EBHQ011A6V3	EBHQ014A6V3	EBHQ016A6V3
Nominal capacity	Heating	kW	11.20	14.00	16.00	11.20	14.00	16.00
	Cooling	kW				10.00	12.50	13.10
Nominal input	Heating	kW	2.47	3.20	3.79	2.47	3.20	3.79
	Cooling	kW				3.60	5.30	5.85
COP			4.54	4.37	4.22	4.54	4.37	4.22
EER						2.78	2.36	2.24
Operation range	Heating	°C	-15~35 ⁽¹⁾			-15~35 ⁽¹⁾		
	Cooling	°C				10~46		
	Domestic water	°C	-20~43			-20~43		
Sound power level	Heating	dBA	64	64	66	64	64	66
	Cooling	dBA				64	66	69
Sound pressure level	Heating	dBA	51	51	52	51	51	52
	Cooling	dBA				50	52	54
Dimensions	HxWxD	mm	1418 x 1435 x 382			1418 x 1435 x 382		
Weight	kg		180			180		
Refrigerant charge	R-410A	kg	2.95			2.95		
Power Supply			1~/230V/50Hz			1~/230V/50Hz		
Recommended fuses		A	32			32		

Measuring conditions: Heating Ta DB/WB 7°C/6°C - LWC 35°C (DT=5°C) - Cooling Ta 35°C - LWE7°C (DT=5°C)

⁽¹⁾ E(D/B)L* models can reach -20°C

			HEATING ONLY			REVERSIBLE		
COMBINATION TABLE	With bottom plate heater		EDLQ011A6V3	EDLQ014A6V3	EDLQ016A6V3	EBLQ011A6V3	EBLQ014A6V3	EBLQ016A6V3
	Without bottom plate heater		EDHQ011A6V3	EDHQ014A6V3	EDHQ016A6V3	EBHQ011A6V3	EBHQ014A6V3	EBHQ016A6V3
Stainless steel domestic hot water tank	EKHWSU150B3V3		•	•	•	•	•	•
	EKHWSU200B3V3		•	•	•	•	•	•
	EKHWSU300B3V3		•	•	•	•	•	•
Solar kit	EKSOLHWAV1		•	•	•	•	•	•
Wired remote control	EKRTW		•	•	•	•	•	•
Wireless remote control	EKRTR + EKRTEETS		•	•	•	•	•	•

			HEATING ONLY			REVERSIBLE		
THREE PHASE	With bottom plate heater		EDLQ011A6W1	EDLQ014A6W1	EDLQ016A6W1	EBLQ011A6W1	EBLQ014A6W1	EBLQ016A6W1
	Without bottom plate heater		EDHQ011A6W1	EDHQ014A6W1	EDHQ016A6W1	EBHQ011A6W1	EBHQ014A6W1	EBHQ016A6W1
Nominal capacity	Heating	kW	11.20	14.00	16.00	11.20	14.00	16.00
	Cooling	kW				10.00	12.50	13.10
Nominal input	Heating	kW	2.51	3.22	3.72	2.51	3.22	3.72
	Cooling	kW				3.60	4.98	5.65
COP			4.46	4.35	4.30	4.46	4.35	4.30
EER						2.78	2.51	2.32
Operation range	Heating	°C	-15~35 ⁽¹⁾			-15~35 ⁽¹⁾		
	Cooling	°C				10~46		
	Domestic water	°C	-20~43			-20~43		
Sound power level	Heating	dBA	64	64	66	64	64	66
	Cooling	dBA				64	66	69
Sound pressure level	Heating	dBA	49	51	53	49	51	53
	Cooling	dBA				50	52	54
Dimensions	HxWxD	mm	1418 x 1435 x 382			1418 x 1435 x 382		
Weight	kg		180			180		
Refrigerant charge	R-410A	kg	2.95			2.95		
Power Supply			3N~/400V/50Hz			3N~/400V/50Hz		
Recommended fuses		A	32			32		

Measuring conditions: Heating Ta DB/WB 7°C/6°C - LWC 35°C (DT=5°C) - Cooling Ta 35°C - LWE7°C (DT=5°)

⁽¹⁾ E(D/B)L* 6W1 models can reach -25°C

			HEATING ONLY			REVERSIBLE		
COMBINATION TABLE	With bottom plate heater		EDLQ011A6W1	EDLQ014A6W1	EDLQ016A6W1	EBLQ011A6W1	EBLQ014A6W1	EBLQ016A6W1
	Without bottom plate heater		EDHQ011A6W1	EDHQ014A6W1	EDHQ016A6W1	EBHQ011A6W1	EBHQ014A6W1	EBHQ016A6W1
Stainless steel domestic hot water tank	EKHWSU150B3V3		•	•	•	•	•	•
	EKHWSU200B3V3		•	•	•	•	•	•
	EKHWSU300B3V3		•	•	•	•	•	•
Solar kit	EKSOLHWAV1		•	•	•	•	•	•
Wired remote control	EKRTW		•	•	•	•	•	•
Wireless remote control	EKRTR + EKRTEETS		•	•	•	•	•	•



Daikin Altherma HT

Air Source Heat Pump




The ideal replacement for existing boilers

A further addition to the range, the award winning Daikin Altherma HT guarantees water temperatures of up to 80°C. This will supply all of a home's heating and hot water requirements, even on the coldest days of the year at temperatures down to -20°C.

Using a specially designed cascading heat pump configuration, flow temperatures of up to 80°C can be achieved without requiring an additional electric heater. The system consists of an outdoor heat pump and an indoor unit hydrobox where the upgraded free heat from the air is transferred to the heating and hot water system. The hot water cylinder completes the package and it can be installed next to or mounted neatly on top of the indoor unit.

Delivering COPs of over 3 – compared to condensing boiler efficiencies of 0.93 on average – the Daikin Altherma HT system provides a direct alternative for boiler replacement, as it can fully support existing radiator systems, providing a highly efficient and versatile high temperature solution without the need for a non-renewable back up heating system.

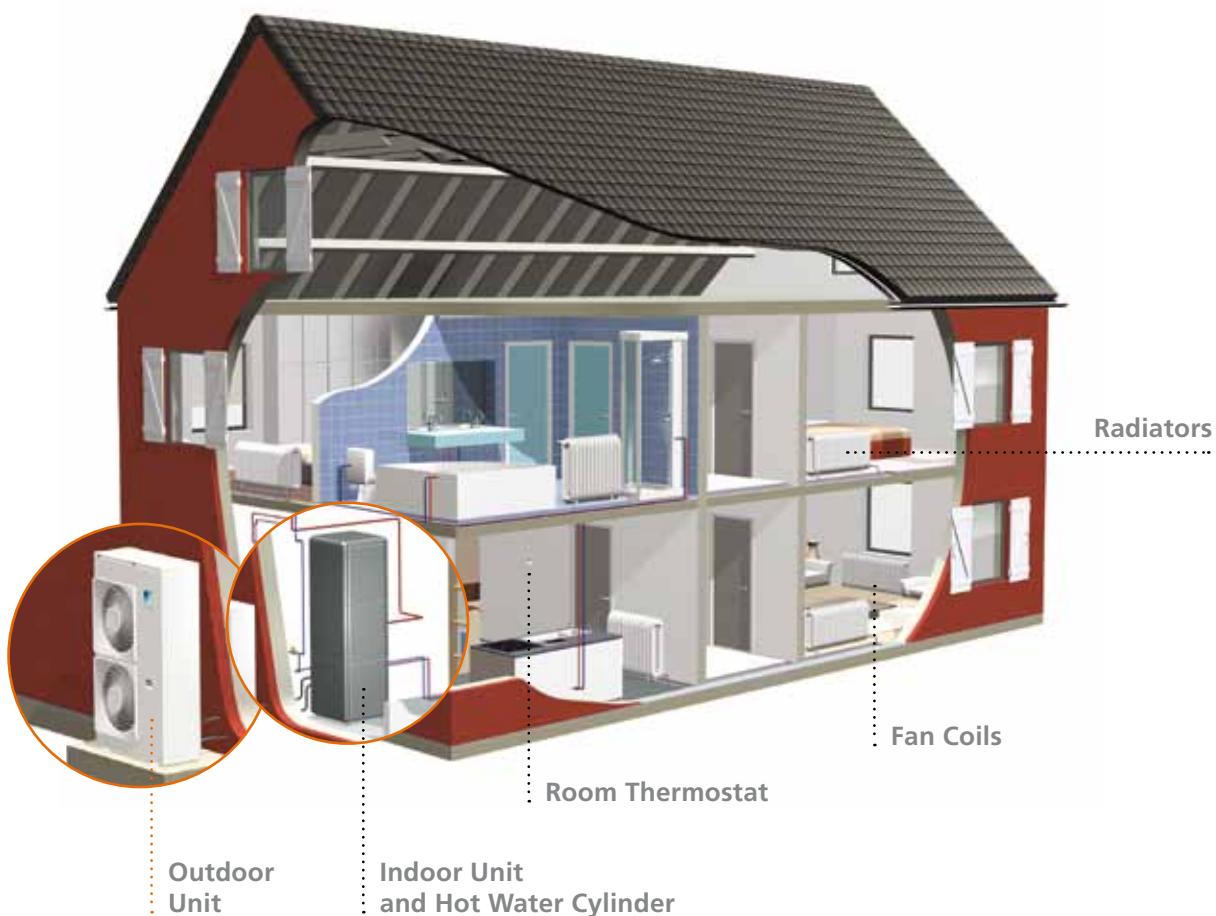

COMBINATION OUTDOOR INDOOR			ERSQ011AAV1	ERSQ014AAV1	ERSQ016AAV1
OUTDOOR UNIT					
SINGLE PHASE					
Nominal capacity	Heating	kW	11	14	16
Nominal input	Heating	kW	3.57	4.66	5.57
COP			3.08	3.00	2.88
Operation range	Heating	°C		-20 to +20	
	Domestic water	°C		-20 to +35	
Sound power level	Heating	dBA	68	69	71
Sound pressure level	Heating	dBA	52	53	55
Dimensions	HxWxD	mm		1345 x 900 x 320	
Weight		kg		120	
Refrigerant charge	R-410A	kg		4.5	
Power Supply				1~/230V/50Hz	
Recommended fuses		A		32	
INDOOR UNIT			EKHBRD011AAV1	EKHBRD014AAV1	EKHBRD016AAV1
FUNCTION HEATING ONLY					
Dimensions	HxWxD	mm		705 x 600 x 695	
Weight		kg		144.25	
Leaving Water Temp		°C		25-80 without electrical heating	
Drain Valve/Fill Valve				Yes	
Material				Precoated sheet metal	

Measuring conditions - EW: 55°C; LW: 65°C; dT: 10°C; ambient conditions: 7°CDB/6°CWB

COMBINATION TABLE INDOOR - ACCESSORIES	EKHBRD011AAV1	EKHBRD014AAV1	EKHBRD016AAV1
Stainless steel DHW cylinder (unvented)	EKHTSU200AA EKHTSU260AA	• •	• •
Wired remote control	EKRTRW	•	•
Wireless remote control	EKRTR + EKRTETS	•	•



HIGH TEMPERATURE

LOW TEMPERATURE

Daikin Solar Thermal systems


As a further extension of Daikin Altherma's renewable energy capabilities, the entire range is also available in combination with the NEW Daikin Solar Thermal Systems.

Available for both high and low temperature systems, the Daikin Solar Systems maximize the use of renewable free energy. The high-efficiency flat plate solar collectors are normally mounted on roof tiles and transfer short-wave solar radiation into heat.

The Daikin Altherma Low temperature system operates in conjunction with an indirect pressurised solar system. A specially designed interface kit transfers the solar heat into the Daikin Altherma hot water cylinder via an external heat exchanger, which allows the entire content of the cylinder to be heated efficiently with solar heat. During solar heating, the heat pump is disabled as the solar energy gets priority, ensuring maximum efficiency. However, whenever extra energy is needed, the Daikin Altherma air source heat pump provides efficient support for hot water production, all with very low environmental impact.

The Daikin Altherma High Temperature operates in conjunction with an unpressurised drain-back system. Thermal store water is supplied directly to the solar panels, heated and then stratified into the Daikin Thermal store, which ensures that the efficiency of the solar panels and the overall use of the system is considerably increased. When the collectors are not in use they are not filled with water, therefore addition of antifreeze agents in this kind of installation is not necessary.

Unlike many other systems in the market, the entire Daikin Altherma and Daikin Solar range offers a complete heating and hot water solution, not just a heat source.

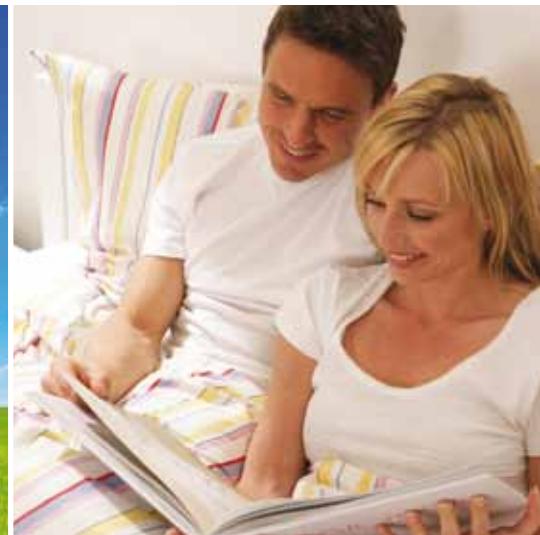



SOLAR COLLECTOR			EKSV26P	EKSH26P
Position		mm	Vertical	Horizontal
Dimensions	HxWxD	m ²	2000x1300x85	1300x2000x85
Outer surface		m ²	2.6	
Absorber surface		m ²	2.36	
Weight	kg		42	
Water content	l		1.7	2.1
Absorber	Harp-shaped copper pipe register with laser-welded highly selective coated aluminum plate			
Coating	Micro-therm (absorption max. 96%, emission ca. 5% +/- 2%)			
Glazing	Single pane safety glass, transmission +/- 92%			
Heat insulation	Mineral wool, 50mm			
Max. pressure drop at 100l/min	mbar		3	0.5
Allowed roof angle			15° to 80°	
Max. standstill temperature	°C		200	
Max. operating pressure	bar		6	

The collectors are standstill resistant over a long period and are tested for thermal shock.
Minimum collector yield over 525kWh/m² at 40% covering proportion, location Würzburg, Germany.

Low Temperature



SOLAR KIT			EKSOLHWAV1
Dimensions	HxWxD	mm	770x305x270
Heat exchanger	pressure drop	kPa	21.5
	max.inlet temp	°C	110
	heat exchange capacity	W/K	1400
Ambient temperature	max.	°C	35
	min.	°C	1
Power supply	1~/220-240V/50Hz		
Power supply intake	Indoor unit		
Weight	kg		8
Sound pressure level	dBA		27



PUMP STATION			EKSRS1A with controller EKSRS3PA
Mounting method			On wall
Dimensions	HxWxD	mm	332x230x145
Power supply			230V / 50 Hz
Control			Digital temperature difference controller with plain text
Max. electric power consumption of the control unit	W		2
Solar panel temperature sensor			Pt1000
Storage tank sensor			PTC
Return flow sensor			PTC
Feed temperature and flow sensor (option)			Voltage signal (3,5V DC)

High Temperature



PUMP STATION			EKSRS3
Mounting method			On side of tank
Dimensions	HxWxD	mm	815x230x142
Power supply			245
Control			Digital temperature difference controller with plain text
Max. electric power consumption of the control unit	W		2
Solar panel temperature sensor			Pt1000
Thermal store sensor			PTC
Feed temperature and flow sensor (option)			Voltage signal (3,5V DC)



DOMESTIC HOT WATER THERMAL STORE WITH SOLAR CONNECTION			EKHWP300A	EKHWP500A
Mounting method			Floor standing	
Casing colour			Dusty grey - RAL 7037	
Casing material			Impact resistant polypropylene	
Water volume	l		300	500
Maximum water temperature	°C		85	
Dimensions	HxWxD	mm	1590x595x615	1590x790x790
Empty weight	kg		67	100
Domestic hot water heat exchanger	Material		Stainless steel 1,4404	
	Volume	l	27.8	28.4
	Maximum operation pressure	bar		6
	Heat exchanger surface	m ²	5.7	5.9
Charging exchanger	Average specific thermal output	W/K	2795	2860
	Material		Stainless steel 1,4404	
	Volume	l	12.3	17.4
	Heat exchanger surface	m ²	2.5	3.7
Auxiliary solar heating exchanger	Average specific thermal output	W/K	1235	1809
	Material		Stainless steel 1,4404	
	Volume	l	-	5
	Heat exchanger surface	m ²	-	1
	Average specific thermal output	W/K	-	313



NEW

HIGH TEMPERATURE

LOW TEMPERATURE

Daikin Heat Pump Convector

The heat pump convector is much more than a fan coil unit or any other heat emitter. The heat pump convector can provide both heating and cooling if required and obtains optimal energy efficiency when connected to a Daikin Altherma Low Temperature system.

With an interlink function, the heat pump convector is able to emit the required levels of heat at low leaving water temperatures, while retaining a compact size. The heat pump convector improves efficiency by approximately 25% compared to a heating system that combines under floor heating and regular fan coil units. The heat pump convector can easily replace existing heat emitters, thanks to its plug and play installation. Available in a 5kW and 2kW capacity.



HEAT PUMP CONVECTOR			EWXV15AVEB	EWXV20AVEB
Dimensions	HxWxD	mm		600 x 700 x 210
Nominal capacity	Heating	kW	1.5	2
	Cooling	kW	1.2	1.7
Sound pressure / Power level	Heating	dBA	19 / 35	29 / 45
	Cooling	dBA	19 / 35	29 / 45
Weight	kg		15	
Power supply			1 ~ / 230V / 50Hz	

Nominal Capacity based on the following conditions:

Heating: Indoor Temp. 20°CDB; Entering Water Temp. 45°C, Water Temperature Drop 5k.
Cooling: Indoor Temp. 27°CDB; Entering Water Temp. 7°C, Water Temperature Drop 5k.


To be ordered in conjunction with 2 way valve EKVKHPC.

Coming soon...

Small Capacity Daikin Altherma Monobloc available in Summer 2010. Featuring capacities of 6kW and 8kW, the small Monobloc will complement the already comprehensive Daikin Altherma product range, providing a plug and go solution for those low temperature applications where smaller heating capacities are required.

COMING
SOON...



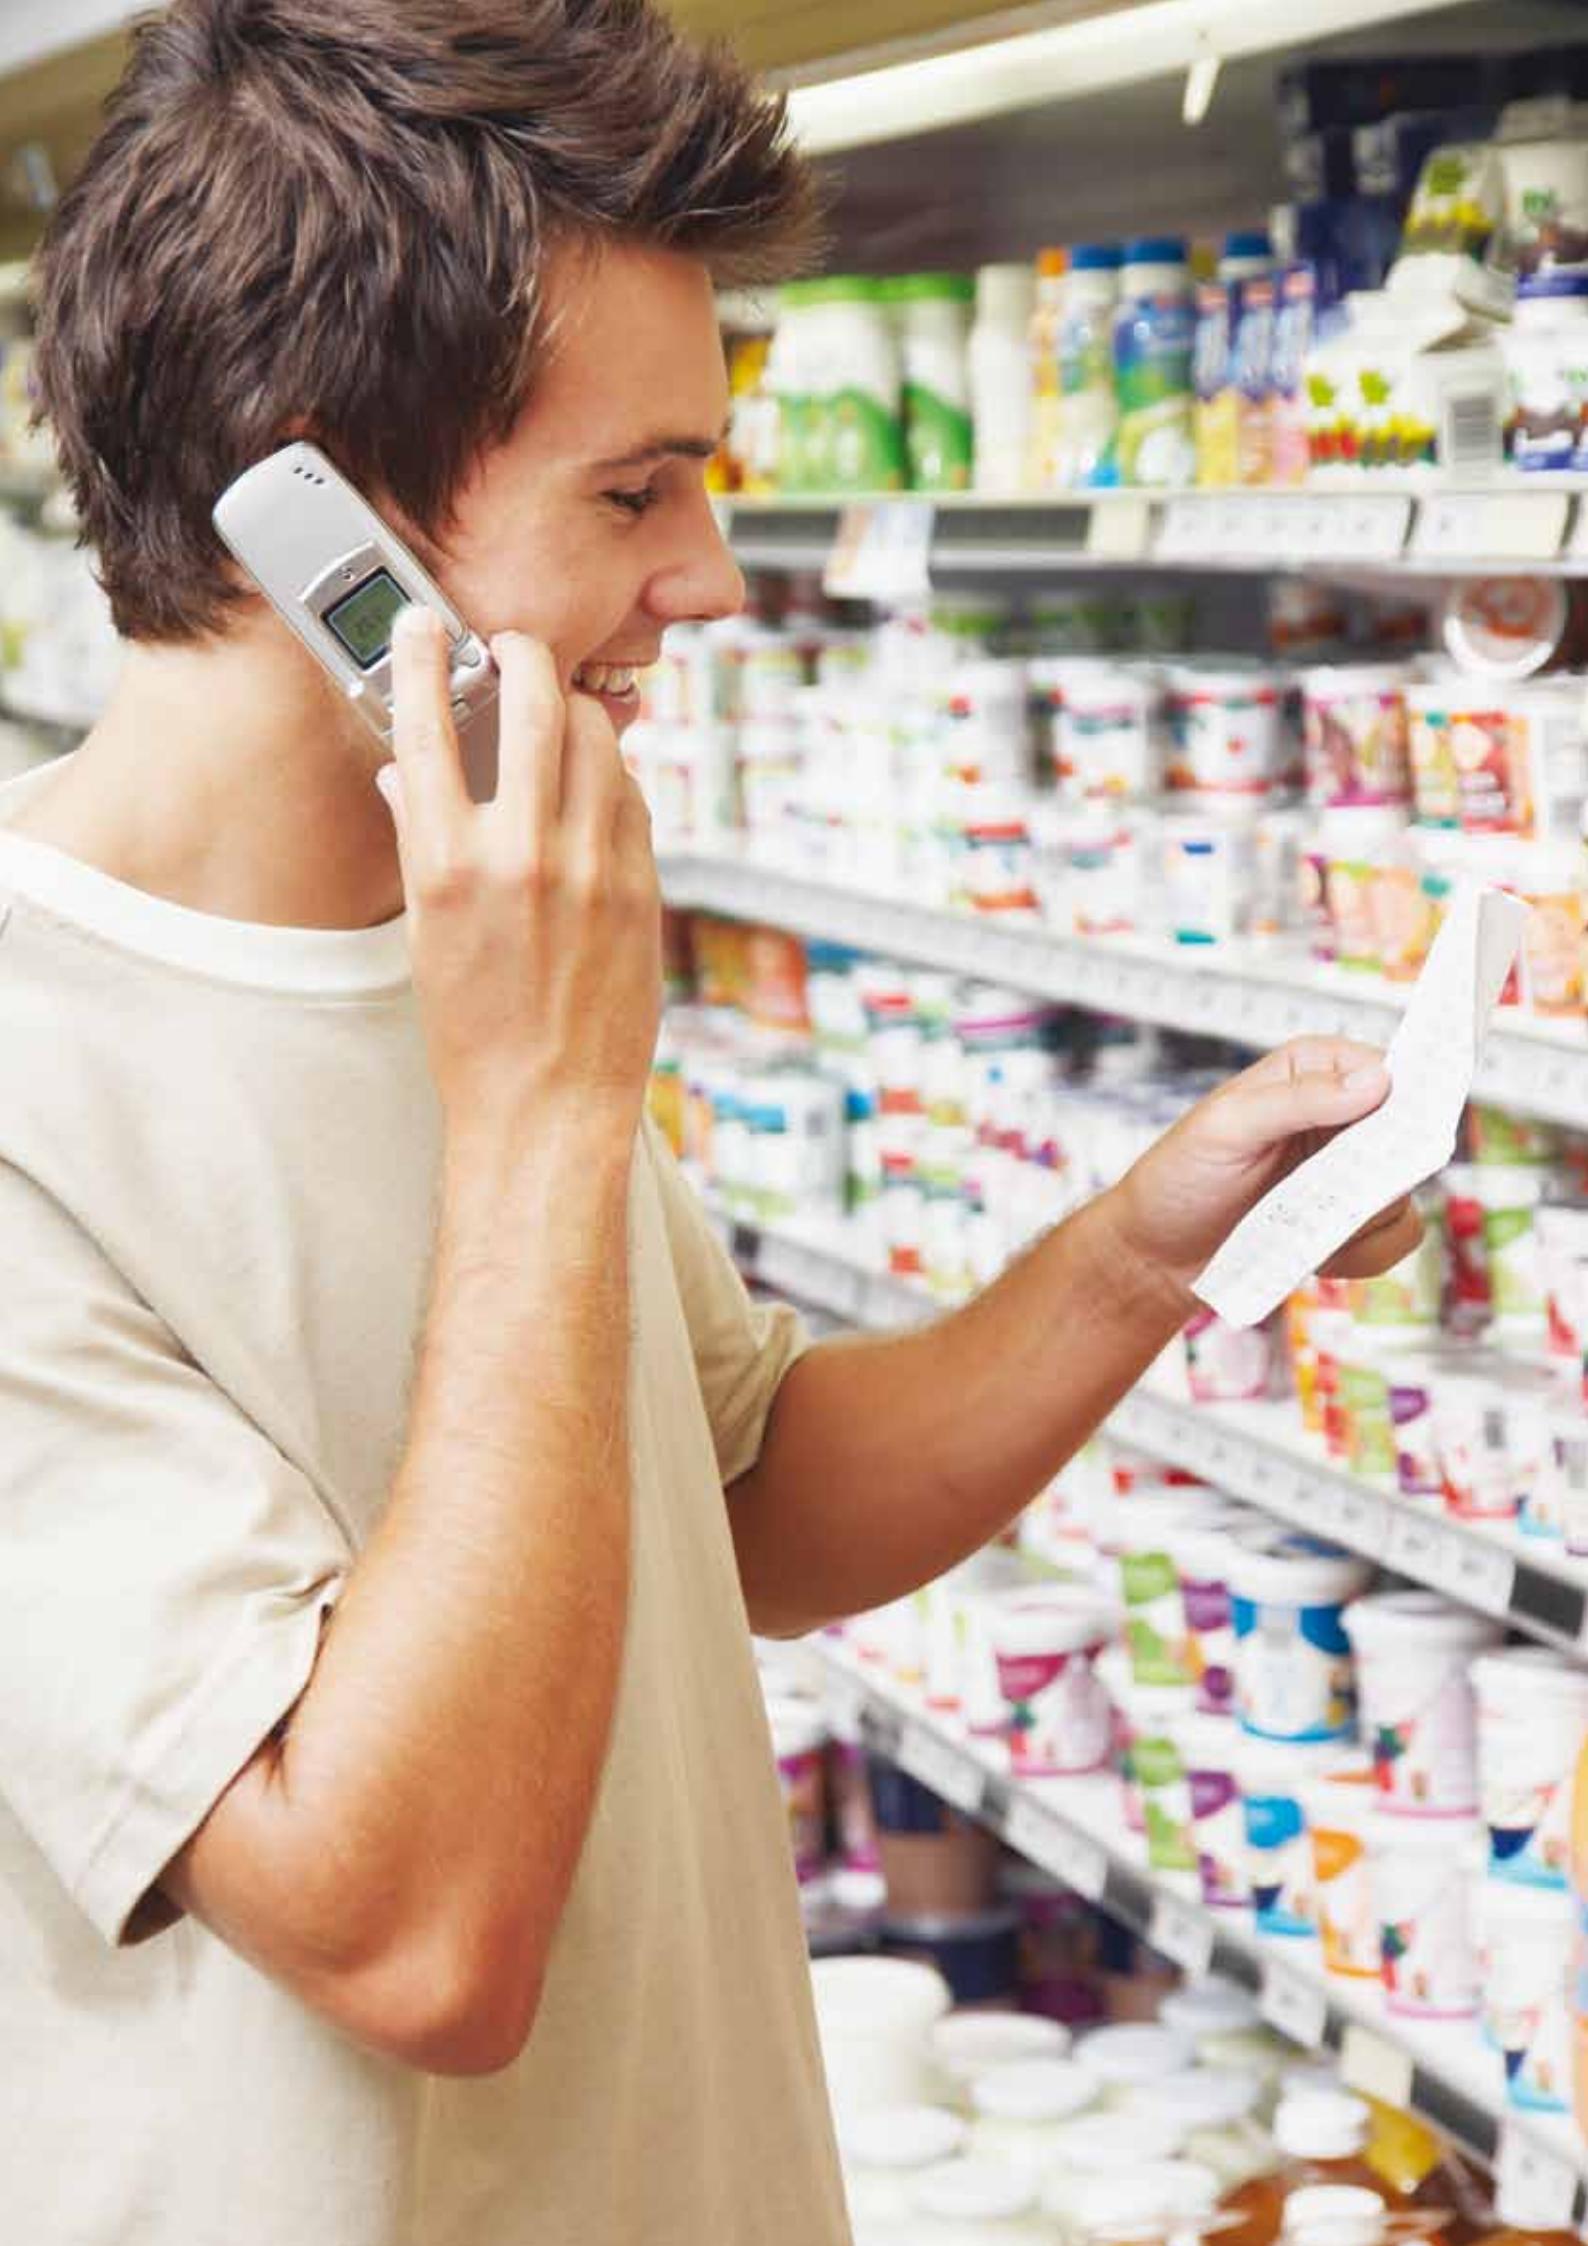



Conveni-pack

The Food Retailing Revolution that Saves Space and Reduces Energy Consumption

Conveni-pack is a highly innovative and revolutionary system that has been developed by Daikin to address the requirements of a challenging retail environment.

Conveni-pack integrates heating, cooling and medium/high temperature refrigeration in one system.



Heating, cooling and refrigeration in one system?

You are not dreaming. Conveni-pack consists of heating, cooling **AND** medium/high refrigeration units, all combined in a single, compact and integrated system.

Until now, conventional systems for medium/high refrigeration, heating and cooling systems have been separated from one another, requiring space and numerous piping connections.

Conveni-pack totally revolutionises this approach.

It consists of an inverter driven outdoor unit and indoor air conditioning units that can be connected to medium/high temperature refrigeration cabinets and/or unit coolers.

Designed specifically for the convenience store

Energy Efficiency

Heat recovery provides up to 23% energy savings in an average year by taking waste heat from the refrigeration system and converting this to comfort heating for free. With the energy savings of up to 27% from the inverter technology the total energy saved can be up to 50% over a one year period compared to a conventional system.

Reduces the Carbon Footprint

The Conveni-pack heat pump unit is a sustainable energy solution that is both energy efficient and reduces the carbon footprint. Actual savings and reduction in emissions will vary from installation to installation.

Improved comfort for Customer and Staff

Integrated heating and cooling means a comfortable environment for the store staff and store customers. A comfortable environment promotes increased spend per shopping basket as well as attracting customers back on a regular basis.

Better Use of Space

The footprint for the Conveni-pack system is considerably less than for other more traditional refrigeration solutions. The additional space created can be more effectively used for additional retail floor space or additional storage area.


Cost Effective Solution

Compared to a traditional heating and refrigeration solution, the purchase of Conveni-pack makes good financial sense. There is a desirable payback, from energy savings, lower maintenance and reduced operating cost, on the initial capital investment. Life time costs savings will be significant.

CONVENI-PACK


What store size is Conveni-pack suitable for?

Conveni-pack is specifically designed and developed for small to medium-sized stores or petrol stations. Furthermore, the concept is scalable, so can be easily expanded as your facility grows.

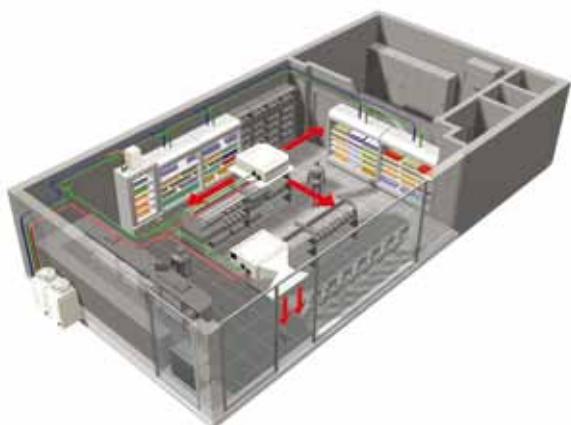

Small stores

For small convenience stores and petrol stations, a single Conveni-pack system is all that is required. Compared to conventional systems, a great advantage of Conveni-pack for a small store is the simplified piping required to connect the Conveni-pack outdoor unit to the indoor services. Instead of eight pipes you need just three, as fewer units have to be inter-connected.

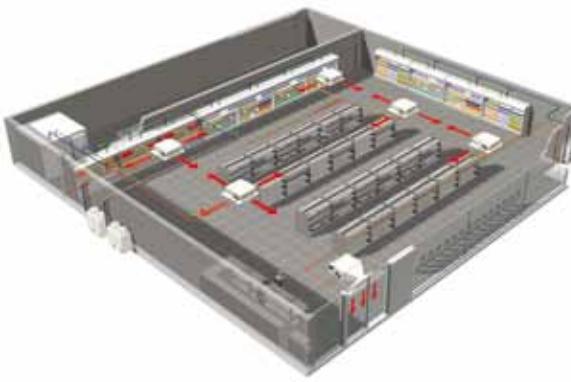

Medium-sized stores

For larger applications, multiple outdoor units can be connected to a variety of refrigeration systems and air conditioning units. What's more, the modularity of the Conveni-pack system maximises installation flexibility. Outdoor units can be grouped into blocks or rows, or distributed around the building, to meet specific requirements of the installation. Additionally, the outdoor units can be located above or below the refrigeration cabinets, inside the building and with long runs if required.

To select multiple systems, use the combined refrigeration and air conditioning loads, as shown in the illustration. Conventional air conditioning or integral refrigeration systems are added where required. This process maximizes the benefits of using Conveni-pack.

Applications

Conveni-pack in high temperature, can be used efficiently in food processing and high temperature preparation rooms where temperatures need to be maintained below 10 and 15°C. High temperature Conveni-pack is also suitable for applications such as wine cellars, bulk vegetable storage and cheese rooms where higher evaporating temperatures are required (-5 to +5°C).

What's included in the Conveni-pack system?

The great flexibility of Conveni-pack means you can select exactly the number of systems you require, as well as various indoor unit options to maximise your investment.

Outdoor unit

The inverter driven outdoor unit has a smaller footprint than standard systems and requires less piping to connect it to the indoor units.

Low noise during operation

Global average sound level pressure at 10m

- Refrigeration high load: 46 dB(A)
- Refrigeration high load with partial heat recovery: 42 dB(A)
- Night time operation, low refrigeration load : 31 dB(A)

The outdoor unit can even be quieter with the sound insulation kit option.



Energy saving

Using Conveni-pack can reduce annual energy consumption by as much as 50% when compared to conventional systems, by using optimised controls, inverter technology and heat recovery. The controls and inverter provide a baseline efficiency gain of 27% and heat recovery can provide up to 23% further energy saving depending on the outdoor temperature.

System controller

The Conveni-pack controller is used for the:

- Control of the air conditioning system
- Display and storage of temperatures for the refrigeration units
- Graphical display for system analysis
- Interface for air conditioning network service systems.

Air conditioning indoor units

- 4-way blow cassettes are suitable for the majority of applications. The number of outlets can be adjusted between four and two, optimising the distribution and avoiding air currents that would disturb the operation of the refrigeration cabinets.
- Ceiling suspended units can be used where no ceiling cavity is available.
- Concealed ceiling units are available in high or low External Static Pressure (ESP) versions for installation where control over the distribution is required, for example between aisles of refrigeration cabinets, or as an energy efficient alternative to direct electric air curtains.



Air conditioning network service systems online monitoring service

Air conditioning network service systems is a 24-hour, 7/7 online monitoring service for Conveni-pack that increases the quality of periodic inspection and maintenance. Air conditioning network service systems immediately detects if a malfunction occurs before the tenants are even aware of the situation.

Reliable periodic inspection ensures Conveni-pack always performs at top levels and continues to deliver its energy-saving benefits. Air conditioning network service systems supports this by providing engineers with valuable diagnostic information.

Coming soon...

New CVP for 2010 (AC17) will be available from the middle of the year.

This new product uses R410A refrigerant of higher capacity and better efficiency, complimenting the lower capacity Conveni-Pack already available (AC14).


To cater for the freezer requirement, the AC17 will have the option of a bolt on inverter driven low temperature compressor.





ZEAS:

R410A Refrigeration

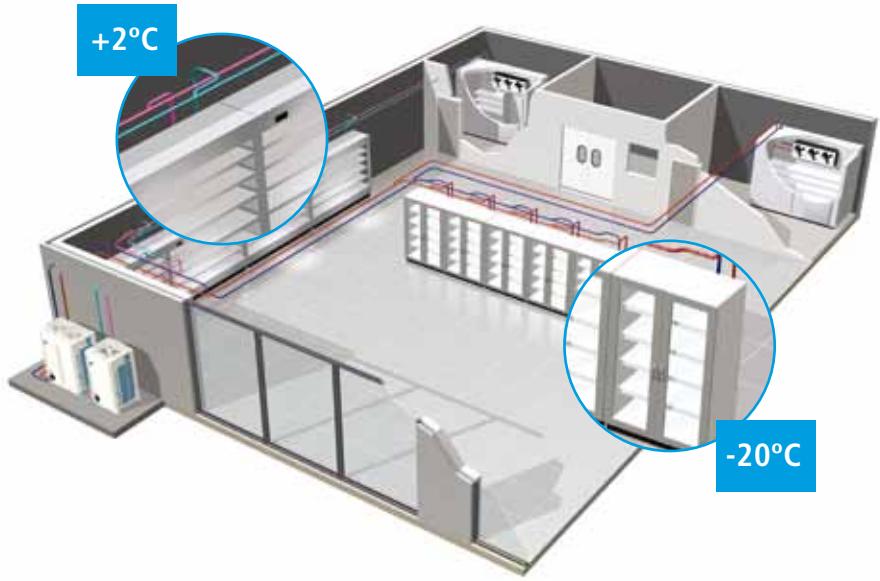

Compact refrigeration condensing units combining performance, low operating costs and low sound levels

Concern for the environment has led to increased demand by the refrigeration industry and food retailers for energy efficiency and environmentally aware solutions. The growing popularity of neighbourhood corner shops and convenience stores has also made noise and size constraints an important factor.

Meeting the demand

To meet this demand, Daikin has developed the ZEAS range, for deep freezing and medium temperature applications: *compact refrigeration condensing units that offer high performance, low operating costs, low sound emissions and renowned Daikin reliability*. The new ZEAS condensing units are the perfect solution for applications with fluctuating loads and high energy efficiency requirements such as supermarkets, blast coolers and freezers, cold storage, restaurants, petrol station shops.

Optimum economy for multiple refrigeration units

The principles behind the technology that revolutionised the comfort cooling industry – Daikin VRV® – have now been applied to refrigeration applications. A single system can supply optimum cooling to multiple refrigeration units, each receiving just the amount of cooling capacity it needs. Inverter control of the scroll compressor maintains high efficiency, even in partial load conditions, resulting in decreased CO₂ emissions, reduced operating costs, and highly efficient and reliable performance in a wide range of applications. A new economiser function allows increased cooling capacity – and hence efficiency – without increasing system size. ZEAS also introduces the use of R410A refrigerant in refrigeration applications: currently the best compromise available for the environment, energy efficiency and equipment cost.

Broad range of applications

ZEAS provides adaptable cooling capacity for multiple evaporators or variable refrigeration loads in ambient temperatures from -15°C to 43°C, with evaporating temperatures from -45°C to +10°C. A range of models in single, double or triple compressor systems (from 5 to 20 HP) are available for freezing and cooling applications. Low sound levels, including "night mode" operation, a compact footprint and easy installation make ZEAS ideal for a range of applications including convenience stores and supermarkets, petrol station forecourts, cold and freezer rooms, and food processing.

Daikin Reliability

The renowned Daikin reliability is further increased thanks to the use of advanced scroll compressor technology and high quality components. Each unit is factory tested, and the use of DC motors with inverter control for both the compressor and fans reduces the number of start/stop cycles, resulting in longer system life.



Residential & Commercial

1. Wall mounted units

FTXR-E / RXR-E	
new⇒ FTXG-J / RXG-J	
FTXS-G / RKS-G/F	
new⇒ FTXS-G / RXS-G/F	
new⇒ FTX-JV/GV / RX-JV/GV	
FAQ-B / RZQS-D	
new⇒ FAQ-B / RZQ-D/B9W1	
FAQ-B / REQ-B	

2. Flexi type units

FLKS-B / RKS-G	
FLXS-B / RXS-G	

3. Floor standing units

FVXS-F / RKS-G	
FVXS-F / RXS-G	
FVQ-B / RZQS-D	
FVQ-B / RZQ-D/B9W1	

4. Concealed ceiling units

FDKS-E/C / RKS-G/F	
FDXS-E/C / RXS-G/F	
FBQ-C / RKS-G/F	
FBQ-C / RXS-G/F	
FBQ-C / RZQS-D	
new⇒ FBQ-C / RZQ-D/B9W1	
FDQ-B / RZQS-D	
new⇒ FDQ-B / RZQ-D/B9W1	
new⇒ FDQ-B/RZQ-C	

5. Cassette units

29 FFQ-B / RKS-G/F	54
30 FFQ-B / RXS-G/F	55
32 new⇒ FCQH-D8 / RZQS-D	56
33 new⇒ FCQH-D8 / RZQ-D/B9W1	57
34 new⇒ FCQ-C8 / RKS-G/F	58
35 new⇒ FCQ-C8 / RXS-G/F	59
36 new⇒ FCQ-C8 / RZQS-D	60
37 new⇒ FCQ-C8 / RZQ-D/B9W1	61
new⇒ FCQ-C8 / REQ-B	62

6. 4-Way blow ceiling suspended cassettes

38 new⇒ FUQ-B / RZQ-D/B9W1	63
----------------------------	----

7. Ceiling suspended units

40 FHQ-B / RKS-G/F	64
41 FHQ-B / RXS-G/F	65
42 FHQ-B / RZQS-D	66
43 new⇒ FHQ-B / RZQ-D/B9W1	67
FHQ-B / REQ-B	68

8. Rooftop

45 new⇒ UATYQ-B	69
46 UATYP-A	69



Ururu
Sarara

Ururu Sarara

 Good Design Award

 **flash streamer**
ONLY BY DAIKIN

A unique combination of humidification, dehumidification, ventilation and air purification

Good temperature control is not all that is needed for a comfortable indoor climate. Precision control of humidity and ventilation of the room is essential. Thanks to the Ururu Sarara, you can humidify, dehumidify, ventilate and purify.

URURU humidification: Pleasant, even during heating

The Ururu humidification system absorbs moisture from the outdoor air and transports it to the indoor unit, quickly and efficiently humidifying the room. This eliminates the need for a separate water supply. Thanks to the perfect combination of humidification and air conditioning, your room heats evenly.

SARARA dehumidification: No drop in temperature, feel the difference

During the summer, a high degree of ambient air humidity, even at moderate temperatures, can make a room feel hot and stuffy. The Sarara dehumidification system reduces indoor humidity without affecting the room temperature, by mixing cool dry air with warm air.

Ventilation: Fresh air, even with closed windows





Unlike the conventional air conditioner, the Ururu Sarara brings fresh, conditioned air into the room. The Ururu Sarara is the first residential air conditioning system that can fill a room of more than 26 m² with fresh air in less than two hours. Furthermore, the temperature of the incoming air is brought to the desired level without heat loss. Another benefit is that the air supply fan is accommodated in the outdoor unit, which means that you will never be bothered by any fan noises.

Air purification: Non-stop purified and allergy-free air

The Ururu Sarara purifies the incoming air in two stages: first in the outdoor unit and then in the indoor unit. Exhaust gases and unpleasant odours are broken down and removed by the outdoor unit before the air streams into the indoor unit. In the indoor unit, the air will then be purified through dust and pollen filtration and the photocatalytic air purification filter will further break down odours such as cigarette smoke and cooking odours. In the last stage, a new Daikin technology called Flash Streamer gives the air a final treatment: it accelerates the Photocatalysis process removing bacteria and viruses in less time. It also breaks down any possible remnants of allergens, like formaldehyde and moulds.

Superb energy efficiency: Energy labels at the top level

Daikin has further improved the energy efficiency. At the same time it has realised substantial energy savings compared to conventional models by achieving an industrial top class EER of 5.00 and COP of 5.14

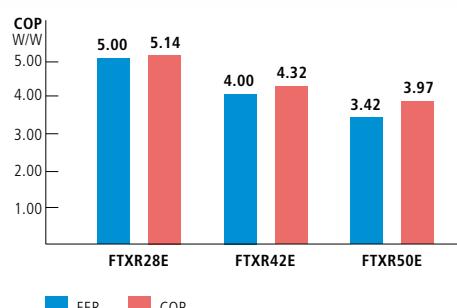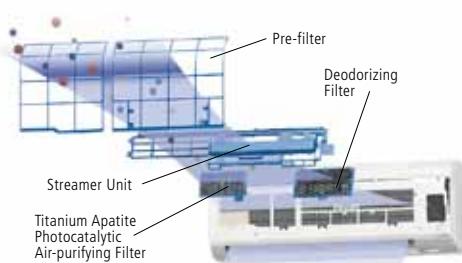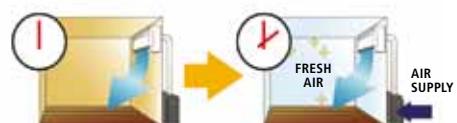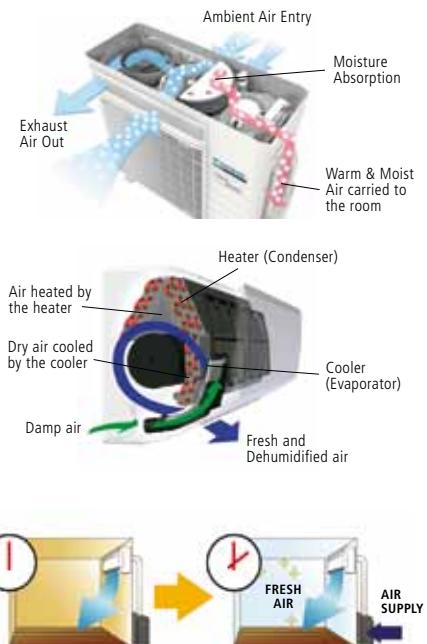

FTXR-E / RXR-E

Wall Mounted Unit



ARC 447A



FTXR-E



RXR-E

- URURU humidification: maintains a comfortable humidity level without any separate water supply
- SARARA dehumidification: maintains a comfortable and fresh indoor environment by removing moisture from the air without lowering the temperature
- Energy efficient: full range A class labels (EER = 5.00/COP = 5.14)
- Powerful ventilation: refreshes the room within 2 hours
- Powerful air purification: increases indoor air quality with Daikin Flash Streamer technology
- Comfortable air flow
- Stylish design
- Other features: moisturizing operation mode, breeze cooling air flow, comfort sleep operation, mould shock operation

HEAT PUMP			INVERTER		
Indoor Units			FTXR28E	FTXR42E	FTXR50E
Nominal Capacity	Cooling capacity	Minimum kW		1.55	
	Standard kW	2.8	4.2	5.0	
	Maximum kW	3.6	4.60	5.50	
	Heating capacity	Minimum kW		1.30	
	Standard kW	3.6	5.1	6.0	
	Maximum kW	5.00	5.6	6.20	
Annual energy consumption		kWh	280	525	730
EER / COP	Cooling / Heating		5.00 / 5.14	4.00 / 4.32	3.42 / 3.97
Energy Label	cooling / heating			A / A	
Dimensions	(Height x Width x Depth)			305x890x209	
Weight	kg			14	
Air Flow Rate	Cooling	H/M/L/SL	m³/min	11.1 / 8.8 / 6.5 / 5.7	12.4 / 9.6 / 6.8 / 6.0
	Heating	H/M/L/SL	m³/min	12.4 / 9.8 / 7.3 / 6.5	12.9 / 10.2 / 7.7 / 6.8
Sound Power	Cooling	Medium	dBA	55	58
	Heating	Medium	dBA	57	58
Sound Pressure	Cooling	H/M/L/SL	dBA	39 / 33 / 26 / 23	42 / 35 / 27 / 24
	Heating	H/M/L/SL	dBA	41 / 35 / 28 / 25	42 / 36 / 29 / 26
Refrigerant	Type			R-410A	
Power Supply				1~220-240V/50Hz	

Outdoor Unit			RXR28E	RXR42E	RXR50E
Dimensions	(Height x Width x Depth)		mm	693x795x285	
Weight	kg			48	
Sound pressure level	Cooling	H/L	dBA	46	48
	Heating	H/L	dBA	46	48
Sound power level	Cooling	H	dBA	60	62
	Heating	Min~Max	°CDB	-10~43	62
Operation Range	Heating	Min~Max	°CWB	-20~18	
	Refrigerant	Type		R-410A	
Power Supply				1~220-240V/50Hz	
Piping connections	Liquid (OD)/Gas/Drain	mm		6.35 / 9.5 / 18	
Piping Length (Maximum)		m		10	



Daikin Emura

The Latest in Design Excellence



Designed in Europe for European climates, Daikin Emura creates the optimum comfort zone all year round. It represents a perfect marriage of style and substance, of form and function, of intelligent heating and efficient cooling.

Sleek design

Available in two different colours – matt crystal white or sandblasted aluminium – Daikin Emura is a new high inverter heat pump, wall mounted unit, that blends iconic design to engineering excellence. Its ultra thin profile and elegant finish can complement any stylish interior. The sleek appearance adds an additional dimension to Daikin's well-known brand values of superior comfort, quality and reliability.



A large display provides an overview of the unit's operation mode, and user friendly buttons give you easy access to Daikin Emura's built-in intelligence. The design of the handset received just as much care and attention in order to match it perfectly to the unit. As with the main unit design, much of the functionality of the handset is concealed by a sleek exterior in white, to complement the look of Daikin Emura.

The operation mode can be easily identified by the LED at the bottom of the unit.

- Red – heating mode
- Blue – cooling mode
- Green – dehumidifying
- Orange – timer mode.

Weekly Timer


Allows programming of the unit on a weekly basis, with the ability to schedule different settings for each day of the week.

FTXG-J / RXG-J


Wall mounted unit



- Energy efficiency
- Movement sensor saves power consumption in unoccupied rooms
- **Comfort Mode:** guarantees draught free operation. When it cools, the flap is positioned horizontally to prevent cold air flow from being blown directly onto the body. When it heats, the flap turns vertically downwards to take the warm air to the bottom of the room.



Cooling mode



Heating mode

- The new titanium apatite photocatalytic air purification filter increases the active surface area for effective purification and deodorisation
- **Powerful operation:** activates the maximum air volume for 20 minutes. After this, the air conditioner automatically returns to its original setting.
- Indoor / outdoor unit low noise operation
- Connection to multi outdoor possible
- Weekly timer: allows programming of the unit on a weekly basis, with the ability to schedule different settings for each day of the week.

HEAT PUMP			INVERTER			
Indoor Units			FTXG25JW	FTXG25JS	FTXG35JW	FTXG35JS
Nominal Capacity	Cooling capacity	Minimum kW	1.3			1.4
		Standard kW	2.5			3.5
		Maximum kW	3.0			3.8
	Heating capacity	Minimum kW	1.3			1.4
		Standard kW	3.4			4.0
		Maximum kW	4.5			5.0
Annual energy consumption			280 kWh			445 kWh
EER / COP	Cooling / Heating		4.46 / 4.36			3.93 / 4.04
Energy Label	cooling / heating			A / A		
Dimensions	(Height x Width x Depth)		mm	295x915x155		
Weight	kg			11		
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.8 / 6.8 / 4.7 / 3.8		10.1 / 7.3 / 4.6 / 3.9
	Heating	H/M/L/SL	m³/min	9.6 / 7.9 / 6.2 / 5.4		10.8 / 8.6 / 6.4 / 5.6
Sound Power	Cooling	High	dBA	54.0		58.0
	Heating	High	dBA	55.0		58.0
Sound Pressure	Cooling	H/M/L/SL	dBA	38.0 / 32.0 / 25.0 / 22.0		42.0 / 34.0 / 26.0 / 23.0
	Heating	H/M/L/SL	dBA	39.0 / 34.0 / 28.0 / 25.0		42.0 / 36.0 / 29.0 / 26.0
Refrigerant	Type			R-410A		
Power Supply				1~/220-240V/50Hz		

Outdoor Unit			RXG25J	RXG35J
Dimensions	(Height x Width x Depth)	mm	550x765x285	
Weight	kg		34	
Sound pressure level	Cooling	H	dBA	46
	Heating	H	dBA	47
Sound power level	Cooling	H	dBA	61
Operation Range	Cooling	Min~Max	°CDB	-10.0~46.0
	Heating	Min~Max	°CWB	-15~20
Refrigerant	Type		R-410A	
Power Supply			1~/220-240V/50Hz	
Piping connections	Liquid (OD)/Gas/Drain	mm	6.35 / 9.5 / 18	
Piping Length (Maximum)	m		20	
Max Installation Height Difference	m		15	

FTXS-G / RKS-G/F

Wall Mounted Unit



- Unified Fan coil unit:** for Cooling Only and Heat Pump applications during installation, a dip switch on the remote controller can be set to indicate whether the fancoil is connected to a Heat Pump or Cooling Only system.
- 2-area intelligent eye:** air flow is sent to a zone other than where the person is located at that moment. If two people are detected in the room, the air flow is projected away from the occupants. If no people are detected, the unit will automatically switch over to the energy-efficient setting.
- Wireless remote controller:** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 4 different actions per day possible.
- Comfort Mode:** guarantees draught free operation. When it cools, the flap is positioned horizontally to prevent cold air flow from being blown directly onto the body. When it heats, the flap turns vertically downwards to take the warm air to the bottom of the room.

- Powerful operation:** activates the maximum air volume for 20 minutes. After this, the air conditioner automatically returns to its original setting.
- Energy saving during operation standby:** current consumption is reduced by about 80% when operating on standby. If no people are detected for more than 20 minutes, the system will automatically switch to the current-saving mode.
- 3D air flow
- Dual air discharge flow for better air distribution
- Consumes up to 30% less energy than non inverter units
- ECONO mode decreases power consumption so that other appliances that need large power supply can be used
- Indoor / outdoor unit silent operation
- Reaches set temperature quickly
- Titanium apatite photocatalytic air purification filter absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses
- Connection to multi outdoor possible

COOLING ONLY				INVERTER						
Indoor Units				FTXS20G	FTXS25G	FTXS35G	FTXS42G	FTXS50G	FTKS60G	FTKS71G
Nominal Capacity	Cooling capacity	Minimum kW	1.3	1.3	1.4		1.7			2.3
		Standard kW	2.0	2.5	3.5	4.2	5.0	6.0	7.1	
		Maximum kW	2.8	3.2	4.0	5.0	5.3	6.7	8.5	
EER	Nominal		4.26	4.55	4.02	3.44	3.29		3.02	
Annual energy consumption	kWh		235	275	435	610	760	995	1175	
Energy Label	cooling				A			B		
Dimensions	(Height x Width x Depth)		mm	295x800x215				290x1050x238		
Weight	kg		9.0	10				12		
Air Flow Rate	Cooling	H/M/L/SL	m³/min	9.4 / 7.4 / 5.5 / 4.0	9.1 / 7.1 / 5.2 / 3.7	10.4 / 7.7 / 4.8 / 3.5	9.1 / 7.7 / 6.3 / 5.4	10.2 / 8.6 / 7.0 / 6.0	16.2 / 13.6 / 11.4 / 10.2	17.2 / 14.5 / 11.5 / 10.5
Sound Power	Cooling	High	dBA	54		58		59	61	62
Sound Pressure	Cooling	H/L/SL	dBA	38 / 25 / 22		42 / 26 / 23	42 / 33 / 30	43 / 34 / 31	45 / 41 / 36 / 33	46 / 42 / 37 / 34
Refrigerant	Type			R-410A						
Power Supply	1~/220-230-240V/50Hz							1~/220-240V/50Hz		
Controller	ARC452A3									

Outdoor Unit			RKS20G	RKS25G	RKS35G	RKS42G	RKS50G	RKS60F	RKS71F
Dimensions (Height x Width x Depth)			mm			550x765x285			735x825x300
Weight kg			32	34	39	48	47		71
Sound pressure level H / L dBA			46 / 43		47 / 44	48 / 44		49 / 46	52 / 49
Sound power level H dBA			61		63	61	63	66	
Operation Range	Cooling	Min~Max °CDB	-10~46						
Refrigerant	Type		R-410A						
Power Supply	1~/220-240V/50Hz								
Piping connections	Liquid (OD)/Gas/Drain mm		6.35 / 9.5 / 18				6.35 / 12.7 / 18		6.35 / 15.9 / 18
Piping Length (Maximum)	m		20				30		
Max Installation Height Difference	m		15				20		

FTXS-G / RXS-G/F

Wall Mounted Unit



- Unified Fan coil unit:** for Cooling Only and Heat Pump applications during installation, a dip switch on the remote controller can be set to indicate whether the fancoil is connected to a Heat Pump or Cooling Only system.
- 2-area intelligent eye:** air flow is sent to a zone other than where the person is located at that moment. If two people are detected in the room, the air flow is projected away from the occupants. If no people are detected, the unit will automatically switch over to the energy-efficient setting.
- Wireless remote controller:** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 4 different actions per day possible.
- Comfort Mode:** guarantees draught free operation. When it cools, the flap is positioned horizontally to prevent cold air flow from being blown directly onto the body. When it heats, the flap turns vertically downwards to take the warm air to the bottom of the room.

- Powerful operation:** activates the maximum air volume for 20 minutes. After this, the air conditioner automatically returns to its original setting.
- Energy saving during operation standby:** current consumption is reduced by about 80% when operating on standby. If no people are detected for more than 20 minutes, the system will automatically switch to the current-saving mode.
- 3D air flow
- Dual air discharge flow for better air distribution
- Consumes up to 30% less energy than non inverter units
- ECONO mode decreases power consumption so that other appliances that need large power supply can be used
- Indoor / outdoor unit silent operation
- Reaches set temperature quickly
- Titanium apatite photocatalytic air purification filter absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses
- Connection to multi outdoor possible

HEAT PUMP			INVERTER						
Indoor Units			FTXS20G	FTXS25G	FTXS35G	FTXS42G	FTXS50G	FTXS60G	FTXS71G
Nominal Capacity	Cooling capacity	Minimum kW	1.3		1.4		1.7		2.3
		Standard kW	2.0	2.5	3.5	4.2	5.0	6.0	7.1
		Maximum kW	2.8	3.2	4.0	5.0	5.3	6.7	8.5
	Heating capacity	Minimum kW	1.3	1.3	1.4		1.7		2.3
		Standard kW	2.7	3.4	4.0	5.4	5.8	7.0	8.2
		Maximum kW	4.3	4.7	5.2	6.0	6.5	8.0	10.2
EER / COP	Cooling / Heating		4.26 / 4.25	4.55 / 4.53	4.02 / 4.17	3.44 / 3.67	3.29 / 3.69	3.02 / 3.43	3.02 / 3.22
Annual energy consumption	kWh		235	275	435	610	760	995	1175
Energy Label	cooling / heating				A / A			B / B	B / C
Dimensions	(Height x Width x Depth)		mm	295x800x215				290x1050x250	
Weight	kg		9.0	10				12	
Air Flow Rate	Cooling	H/M/L/SL	m³/min	9.4 / 7.4 / 5.5 / 4.0	9.1 / 7.1 / 5.2 / 3.7	10.4 / 7.7 / 4.8 / 3.5	9.1 / 7.7 / 6.3 / 5.4	10.2 / 8.6 / 7.0 / 6.0	16 / 13.8 / 11.3 / 10.1
	Heating	H/M/L/SL	m³/min	9.9 / 8.2 / 6.5 / 5.5	9.8 / 7.9 / 6.2 / 5.2	10.6 / 8.5 / 6.4 / 5.4	11.2 / 9.4 / 7.7 / 6.8	11.0 / 9.3 / 7.6 / 6.7	17.2 / 14.9 / 17.6 / 11.3
Sound Power	Cooling	High	dBA	54		58	59	61	62
	Heating	High	dBA	56		57	58	60	62
Sound Pressure	Cooling	H/L/SL	dBA	38 / 25 / 22		42 / 26 / 23	42 / 33 / 30	43 / 34 / 31	45 / 41 / 36 / 33
	Heating	H/L/SL	dBA	38 / 28 / 25	39 / 28 / 25	42 / 29 / 26	42 / 33 / 30	44 / 34 / 31	46 / 42 / 37 / 34
Refrigerant	Type			R-410A					
Power Supply	1~/220-230-240V/50Hz						1~/220-240V/50Hz		
Controller	ARC452A3								

Outdoor Unit			RXS20G	RXS25G	RXS35G	RXS42G	RXS50G	RXS60F	RXS71F		
Dimensions	(Height x Width x Depth)		mm	550x765x285			735x825x300		770x900x320		
Weight	kg		32	34		39	48		71		
Sound Pressure level	Cooling	H/L	dBA	46 / 43		48 / 44	49 / 46		52 / 49		
	Heating	H/L	dBA	47 / 44		48 / 45	49 / 46		52 / 49		
Sound Power	Cooling	dBA		61		63	62		66		
Operation Range	Cooling	Min-Max °CDB		-10~46							
	Heating	Min-Max °CWB		-15~20			-15~18	-15~20			
Refrigerant	Type			R-410A							
Power Supply	1~/220-240V/50Hz										
Piping connections	Liquid (OD)/Gas/Drain		mm	6.35 / 9.5 / 18				6.35 / 12.7 / 18			
Piping Length (Maximum)	m			20				30			
Max Installation Height Difference	m			15				20			

FTX-JV/GV / RX-JV/GV

Wall Mounted Unit



ARC433A87
(Class 20-35)



ARC433B70
(Class 50-71)



FTX20-35JV



FTXS50-71GV



RX-JV

- New classes 5.0kW to 7.1kW to offer complete range
- Consumes up to 30% less energy than non inverter units
- Dual air discharge flow for better air distribution
- ECONO mode decreases power consumption so that other appliances that need large power supply can be used
- Indoor unit On/Off switch
- Indoor unit silent operation
- Titanium apatite photocatalytic air purification filter
- Anticorrosion treatment of outdoor heat exchanger fin
- 3D airflow
- **Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- **Powerful operation:** activates the maximum air volume for 20 minutes. After this, the air conditioner automatically returns to its original setting.

- **Energy saving during operation standby:** current consumption is reduced by about 80% when operating on standby. If no people are detected for more than 20 minutes, the system will automatically switch to the current-saving mode.
- **Comfort Mode:** guarantees draught free operation. When it cools, the flap is positioned horizontally to prevent cold air flow from being blown directly onto the body. When it heats, the flap turns vertically downwards to take the warm air to the bottom of the room.

HEAT PUMP				INVERTER					
Indoor Units				FTX20JV	FTX25JV	FTX35JV	FTX50GV	FTX60GV	FTX71GV
Capacity	Cooling capacity	Minimum	kW	1.3				1.7	2.3
		Standard	kW	2.0	2.5	3.3	5.0	6.0	7.1
		Maximum	kW	2.6	3.0	3.8	6.0	6.7	8.5
	Heating capacity	Minimum	kW	1.3				1.7	2.3
		Standard	kW	2.5	2.8	3.4	5.8	7.0	8.2
		Maximum	kW	3.5	4.0	4.8	7.7	8.0	10.2
EER / COP	Cooling / Heating		3.64 / 4.24	3.42 / 4.06	3.37 / 3.76	3.23 / 3.63	3.02 / 3.43	3.02 / 3.22	
Annual energy consumption	kWh		275	365	490	775	995	1,175	
Energy Label	cooling / heating			A / A		A / A	B / B	B / C	
Dimensions	(Height x Width x Depth)		mm	283x770x198				290x1,050x238	
Weight	kg			7				12	
Air Flow Rate	Cooling	H/M/L/SL	m³/min	9.1 / 7.4 / 5.9 / 4.7	9.2 / 7.6 / 6.0 / 4.8	9.3 / 7.7 / 6.1 / 4.9	14.7	16.2	17.4
	Heating	H/M/L/SL	m³/min	9.4 / 7.8 / 6.3 / 5.5	9.7 / 8.0 / 6.3 / 5.5	10.1 / 8.4 / 6.7 / 5.7	16.1	17.4	19.7
Sound Power	Cooling	High	dBA	55	56	57	59	61	62
	Heating	High	dBA	55	56	57	58	60	62
Sound Pressure	Cooling	H/M/L/SL	dBA	39 / 33 / 25 / 22	40 / 33 / 26 / 22	41 / 34 / 27 / 23	43 / 39 / 34 / 31	45 / 41 / 36 / 33	46 / 42 / 37 / 34
	Heating	H/M/L/SL	dBA	39 / 34 / 28 / 25	40 / 34 / 28 / 25	41 / 35 / 29 / 26	42 / 38 / 33 / 30	44 / 40 / 35 / 32	46 / 42 / 37 / 34
Refrigerant	Type			R-410A				R-410A	
Power Supply	1~/220-240V/50Hz				1~/220-240V/50Hz				

Outdoor Unit			RX20JV	RX25JV	RX35JV	RX50GV	RX60GV	RX71GV	
Dimensions	(Height x Width x Depth)		550x658x275				735x825x300		
Weight	kg		28		30	48		71	
Operation Range	Cooling	Min~Max	°CDB	10~46			10~46		
		Min~Max	°CWB	-15~20			-15~20		
Sound Power	Cooling		dBA	60	62	61	63	66	
Sound Pressure (High)	Cooling		dBA	46	48	47	49	52	
	Heating		dBA	47	48	48	49	52	
Refrigerant	Type			R-410A				R-410A	
Power Supply	1~/220-240V/50Hz				1~/220-240V/50Hz				
Piping connections	Liquid (OD)/Gas/Drain	mm	6.35 / 9.52 / 18				6.35 / 12.7 / 18.0		
Piping Length (Maximum)	m		15				30		
Max Installation Height Difference	m		12				20		

* Note: grey cells contain preliminary data



FAQ-B / RZQS-D

Wall Mounted Unit



- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- Ideal for shops, restaurants or offices requiring maximum floor space for furniture, decorations and fittings
- Auto-swing function ensures efficient air distribution via louvers that close automatically when the unit is switched off
- Automatic movable louver can be fixed at any desired angle
- All maintenance operations can be carried out from the front of the unit
- Suitable for Twin, Triple and Double Twin applications

HEAT PUMP				COMFORT INVERTER		
				FAQ71B	FAQ100B	
Indoor Units	Capacity	Cooling capacity	Standard kW	7.1	10.0	
		Heating capacity	Standard kW	8.0	11.2	
EER / COP	Cooling / Heating			2.91 / 3.21	2.81 / 3.21	
Annual energy consumption			kWh	1,220	1,779	
Energy Label	cooling / heating			C / C		
Dimensions	(Height x Width x Depth)		mm	290x1050x230	360x1570x200	
Weight			kg	13.0	26.0	
Air Flow Rate	Cooling	High/Low	m³/min	19.0 / 15.0	23.0 / 19.0	
	Heating	High/Low	m³/min	19.0 / 15.0	23.0 / 19.0	
Sound Power	Cooling	High/Low	dBA	59.0 / 53.0	61.0 / 57.0	
	Heating	High/Low	dBA	59.0 / 53.0	61.0 / 57.0	
Sound Pressure	Cooling	High/Low	dBA	43.0 / 37.0	45.0 / 41.0	
	Heating	High/Low	dBA	43.0 / 37.0	45.0 / 41.0	
Refrigerant			Type	R-410A		
Power Supply				220-240V/50Hz		
Controller	Wired/Wireless			BRC1D52 (Standard) / BRC1E51A (Optional)	BRC7E618 (Optional) / BRC7C510 (Optional)	

Outdoor Unit			RZQS71DV1	RZQS100DV1
Dimensions	(Height x Width x Depth)	mm	770x900x320	1170x900x320
Weight	kg	68	103	
Operation Range	Cooling	Min-Max °CDB	-5~46	
	Heating	Min-Max °CWB	-15~15.5	
Sound Power	Cooling	dBA	65	67
Sound Pressure (Standard)	Cooling	dBA	49	51
	Heating	dBA	51	55
Sound Level (Night quiet)	Sound Pressure	dBA	47	49
Refrigerant			R-410A	
Power Supply			220-240V/50Hz	
Piping connections	Liquid (OD)/Gas/Drain	mm	9.52 / 15.9 / 26	
Piping Length (Maximum)	m	30	50	
Max. interunit level difference	m		0.5	
Max Installation Height Difference	m	15	30	

FAQ-B / RZQ-D/B9W1

Wall Mounted Unit



BRC1E51A



BRC1D52



BRC7C510



FAQ71B



RZQ71D



RZQ100D

- Seasonal Inverter Technology:** first Sky Air range in the market optimized for seasonal efficiency.
- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- Ideal for shops, restaurants or offices requiring maximum floor space for furniture, decorations and fittings
- Auto-swing function ensures efficient air distribution via louvers that close automatically when the unit is switched off
- Automatic movable louver can be fixed at any desired angle
- All maintenance operations can be carried out from the front of the unit
- Suitable for Twin, Triple and Double Twin applications
- Comms, computer and server room cooling possible with EDP setting.
- Re-use of existing R22 and R407C piping possible.
(See R22 Replacement leaflet)



HEAT PUMP				SEASONAL INVERTER		
Indoor Units				FAQ71B	FAQ100B	
Capacity	Cooling capacity	Standard	kW	7.1	10	
	Heating capacity	Standard	kW	8.0	11.2	
Nominal	EER / COP	Cooling / Heating		3.11 / 3.43	3.04 / 3.49	3.6 / 3.3
	Annual energy consumption	kWh		1141	1645	1390
Seasonal (*)	Energy Label	Cooling / Heating		B / B	A / C	
Dimensions	(Height x Width x Depth)		mm	290x1050x230	360x1570x200	
Weight			kg	13.0	26.0	
Air Flow Rate	Cooling	High/Low	m³/min	19.0 / 15.0	23.0 / 19.0	
	Heating	High/Low	m³/min	19.0 / 15.0	23.0 / 19.0	
Sound Power	Cooling	High/Low	dBA	59.0 / 53.0	61.0 / 57.0	
	Heating	High/Low	dBA	59.0 / 53.0	61.0 / 57.0	
Sound Pressure	Cooling	High/Low	dBA	43.0 / 37.0	45.0 / 41.0	
	Heating	High/Low	dBA	43.0 / 37.0	45.0 / 41.0	
Refrigerant			Type	R-410A		
Power Supply				1~/220-240V/50Hz		
Controller	Wired/Wireless		BRC1D52 (Standard) BRC1E51A (Optional)	BRC7E618 (Optional)	BRC1D52 (Standard) BRC1E51A (Optional)	BRC7C510 (Optional)

Outdoor Unit			RZQ71D3V1	RZQ100D9V1	RZQ100B9W1
Dimensions	(Height x Width x Depth)	mm	770x900x320	1345x900x320	
Weight	kg		67	108	106
Operation Range	Cooling	Min-Max	°CDB	-15.0~50.0	
	Heating	Min-Max	°CWB	-20.0~15.5	
Sound Power	Cooling	dBA	64	65	
Sound Pressure (Standard)	Cooling	dBA	48	50	
	Heating	dBA	50	52	
Sound Level (Night quiet)	Sound Pressure	dBA	43	45	
Refrigerant			R-410A		
Power Supply				1~/220-240V/50Hz	3N~/400V/50Hz
Piping connections	Liquid (OD)/Gas/Drain	mm		9.52 / 15.9 / 26	
Piping Length (Maximum)	m		50		75
Max. interunit level difference	m			0.5	
Max Installation Height Difference	m			30	

(*) Seasonal efficiencies are calculated based on draft PrEn 14825: 2009 (under inquiry stage). Data are subject to change.



FAQ-B / REQ-B

Wall Mounted Unit



BR
C1D52

BRCE618

E618

FAQ71B

REQ71B

- **Wired remote controller provides** a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
 - **BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
 - **Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
 - **User Access:** different levels of user access can be selected.

- Ideal for shops, restaurants or offices requiring maximum floor space for furniture, decorations and fittings
 - Auto-swing function ensures efficient air distribution via louvers that close automatically when the unit is switched off
 - Automatic movable louver can be fixed at any desired angle
 - All maintenance operations can be carried out from the front of the unit
 - Suitable for Twin, Triple and Double Twin applications

HEAT PUMP				NON-INVERTER	
Indoor Units				FAQ71BVV1B	FAQ100BVV1B
Capacity	Cooling capacity	Standard	kW	7.10	10.0
	Heating capacity	Standard	kW	8.0	11.2
Annual energy consumption		kWh		TBC	TBC
EER / COP	Cooling / Heating			TBC	TBC
Energy Label	cooling / heating			TBC	TBC
Dimensions	(Height x Width x Depth)		mm	290x1050x230	360x1570x200
Weight				13.0	26.0
Air Flow Rate	Cooling	High/Low	m³/min	19.0 / 15.0	23.0 / 19.0
	Heating	High/Low	m³/min	19.0 / 15.0	23.0 / 19.0
Sound Power	Cooling	High/Low	dBA	59.0 / 53.0	61.0 / 57.0
Sound Pressure	Cooling	High/Low	dBA	43.0 / 37.0	45.0 / 41.0
	Heating	High/Low	dBA	43.0 / 37.0	45.0 / 41.0
Refrigerant	Type			R-410A	
Power Supply				1~220-240V/50Hz	
Controller	Wired/Wireless			BRC1D52 (Standard) / BRC1E51A (Optional)	BRC7E618 (Optional - Class 71) / BRC7C510 (Optional - Class 100)

Outdoor Unit			REQ71BV	REQ71BW	REQ100BV	REQ100BW
Dimensions	(Height x Width x Depth)		mm	770x900x320	1170x900x320	
Weight			kg	83	102	100
Operation Range	Cooling	Min~Max	°CDB	10.0~46.0		
	Heating	Min~Max	°CWB	-10~15		
Sound Level (nominal)	Sound Power	Cooling	dBA	65.0	70.0	
	Sound Pressure	Cooling	dBA	53.0	57.0	
Refrigerant	Type		R-410A			
Power Supply			1~/230V/50Hz	3N~/400V/50Hz	1~/230V/50Hz	3N~/400V/50Hz
Piping connections	Liquid (OD)/Gas/Drain	mm	9.52 / 15.9 / 26			
Piping Length (Maximum)	m		50			
Max Installation Height Difference	m		30			

FLKS-B / RKS-G

Flexi Type Unit



ARC433A6

FLKS-B

RKS25,35G

- This flexi type unit allows both ceiling suspended and floor level installation.
- Low height enables it to fit beneath a window
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- Powerful operation:** activates the maximum air volume for 20 minutes. After this, the air conditioner automatically returns to its original setting.
- Night set mode:** if the timer is switched on, the air conditioner will automatically set the temperature – an increase of 0.5°C when cooling and a decrease of 2°C when heating – to prevent the room from rapidly cooling or heating for more comfort during sleeping.
- Consumes up to 30% less energy than non inverter units
- Reaches set temperature more quickly
- Auto-swing function ensures efficient air and temperature distribution.
- Air purification filter
- Indoor / outdoor unit silent operation
- Connection to multi outdoor possible



COOLING ONLY				INVERTER		
Indoor Units				FLKS25B	FLKS35B	FLKS50B
Capacity	Cooling capacity	Minimum kW	1.2	1.2	0.9	
		Standard kW	2.5	3.5	4.9	
		Maximum kW	3.0	3.8	5.3	
EER	Nominal		3.85	3.70	2.85	
Annual energy consumption		kWh	325	565	860	
Energy Label	cooling		A	B	C	
Dimensions	(Height x Width x Depth)	mm	490x1050x200	490x1050x200	490x1050x200	
Weight	kg		16.0	16.0	17.0	
Air Flow Rate	Cooling	H/M/L/SL	m³/min	7.60 / 6.80 / 6.00 / 5.2	8.60 / 7.60 / 6.6 / 5.6	11.40 / 10.00 / 8.50 / 7.5
Sound Power	Cooling	High	dBA	53.0	54.0	63.0
Sound Pressure	Cooling	H/M/L/SL	dBA	37.0 / 34.0 / 31.0 / 28.0	38.0 / 35.0 / 32.0 / 29.0	47.0 / 43.0 / 39.0 / 36.0
Refrigerant		Type		R-410A	R-410A	R-410A
Power Supply				1~/220-240/220-230V/50/60Hz	1~/220-240/220-230V/50/60Hz	1~/220-240/220-230V/50/60Hz

Outdoor Unit			RK525G	RKS35G	RKS50G
Dimensions	(Height x Width x Depth)	mm	550x765x285	550x765x285	735x825x300
Weight	kg		34	34	48
Operation Range	Cooling	Min~Max °CDB	-10~46	-10~46	-10~46
Sound Power	Cooling	dBA	61	63	62
Sound Pressure (Low)	Cooling	dBA	43	44	44
Sound Pressure (High)	Cooling	dBA	46	48	48
Refrigerant		Type	R-410A	R-410A	R-410A
Power Supply			1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz
Piping connections	Liquid (OD)/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7
Piping Length (Maximum)		m	20	20	30
Max Installation Height Difference		m	15	15	20

FLXS-B / RXS-G

Flexi Type Unit



- This flexi type unit allows both ceiling suspended and floor level installation.
- Low height enables it to fit beneath a window
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- Powerful operation:** activates the maximum air volume for 20 minutes. After this, the air conditioner automatically returns to its original setting.
- Night set mode:** if the timer is switched on, the air conditioner will automatically set the temperature – an increase of 0.5°C when cooling and a decrease of 2°C when heating – to prevent the room from rapidly cooling or heating for more comfort during sleeping.

- Consumes up to 30% less energy than non inverter units
- Reaches set temperature more quickly
- Auto-swing function ensures efficient air and temperature distribution.
- Air purification filter
- Indoor / outdoor unit silent operation
- Connection to multi outdoor possible



HEAT PUMP			INVERTER		
Indoor Units			FLXS25B	FLXS35B	FLXS50B
Capacity	Cooling capacity	Minimum kW	1.2	1.2	0.9
		Standard kW	2.5	3.5	4.9
		Maximum kW	3.0	3.8	5.3
	Heating capacity	Minimum kW	1.2	1.2	0.9
		Standard kW	3.4	4.0	6.1
		Maximum kW	4.5	5.0	7.5
EER / COP	Cooling / Heating		3.85 / 3.47	3.10 / 3.25	2.85 / 3.35
Annual energy consumption	kWh		325	565	860
Energy Label	cooling / heating		A / B	B / C	C / C
Dimensions	(Height x Width x Depth)		490x1050x200	490x1050x200	490x1050x200
Weight	kg		16.0	16.0	17.0
Air Flow Rate	Cooling	H/M/L/SL	m³/min	7.60 / 6.80 / 6.00 / 5.2	8.60 / 7.60 / 6.60 / 5.6
	Heating	H/M/L/SL	m³/min	9.20 / 8.30 / 7.40 / 6.6	9.80 / 8.90 / 8.00 / 7.2
Sound Power	Cooling	High	dBA	53.0	54.0
	Heating	High	dBA	-	63.0
Sound Pressure	Cooling	H/M/L/SL	dBA	37.0 / 34.0 / 31.0 / 28.0	38.0 / 35.0 / 32.0 / 29.0
	Heating	H/M/L/SL	dBA	37.0 / 34.0 / 31.0 / 29.0	39.0 / 36.0 / 33.0 / 30.0
Refrigerant	Type		R-410A	R-410A	R-410A
Power Supply	1~/220-240/220-230V/50/60Hz		1~/220-240/220-230V/50/60Hz		1~/220-240/220-230V/50/60Hz

Outdoor Unit			RXS25G	RXS35G	RXS50G
Dimensions	(Height x Width x Depth)		550x765x285	550x765x285	735x825x300
Weight	kg		34	34	48
Operation Range	Cooling	Min~Max °CDB	-10~46	-10~46	-10~46
	Heating	Min~Max °CWB	-15~20	-15~20	-15~18
Sound Power	Cooling	dBA	61	63	62
Sound Pressure (Low)	Cooling	dBA	43	44	44
	Heating	dBA	44	45	45
Sound Pressure (High)	Cooling	dBA	46	48	48
	Heating	dBA	47	48	48
Refrigerant	Type		R-410A	R-410A	R-410A
Power Supply	1~/220-240/220-230V/50/60Hz		1~/220-240/50Hz		1~/220-240/50Hz
Piping connections	Liquid (OD)/Gas	mm	6.35/9.52/18	6.35/9.52/18	6.35/12.7/18
Piping Length (Maximum)	m		20	20	30
Max Installation Height Difference	m		15	15	20

FVXS-F / RKS-G

Floor Standing Unit



ARC452A1



FVXS-F



RKS25,35G

- Unified Fan coil unit:** for Cooling Only and Heat Pump applications during installation, a dip switch on the remote controller can be set to indicate whether the fan coil is connected to a Heat Pump or Cooling Only system.



- Wireless remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 4 actions per day possible

- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- Different levels of user access can be selected.
- Titanium apatite photocatalytic air purification filter
- Can be installed against a wall or recessed
- Dual air discharge flow for better air distribution
- ECONO mode decreases power consumption so that other appliances that need large power supply can be used
- Lightweight but sturdy design
- Connection to multi outdoor possible

COOLING ONLY				INVERTER		
Indoor Units				FVXS25F	FVXS35F	FVXS50F
Capacity	Cooling capacity	Minimum	kW	1.3	1.4	1.4
		Standard	kW	2.5	3.5	5.0
		Maximum	kW	3.0	3.8	5.6
EER	Nominal			4.39	3.43	3.23
Annual energy consumption		kWh		285	510	775
Energy Label	cooling			A	A	A
Dimensions	(Height x Width x Depth)		mm	600x700x210	600x700x210	600x700x210
Weight			kg	14	14	14
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.2 / 6.5 / 4.8 / 4.1	8.5 / 6.7 / 4.9 / 4.5	10.7 / 9.2 / 7.8 / 6.6
Sound Power	Cooling	High	dBA	54	55	56
Sound Pressure	Cooling	High	dBA	38 / 32 / 26 / 23	39 / 33 / 27 / 24	44 / 40 / 36 / 32
Refrigerant			Type	R-410A		
Power Supply				1~220-240V/50Hz		
Controller				ARC452A1		

Outdoor Unit			RKS25G	RKS35G	RKS50G
Dimensions	(Height x Width x Depth)		550x765x285	550x765x285	735x825x300
Weight	kg		34	34	48
Operation Range	Cooling	Min-Max	°CDB	-10~46	-10~46
Sound Power	Cooling	dBA	61	63	62
Sound Pressure (Low)	Cooling	dBA	43	44	44
Sound Pressure (High)	Cooling	dBA	46	48	48
Refrigerant			Type	R-410A	
Power Supply				1~220-240V/50Hz	
Piping connections	Liquid (OD)/Gas		mm	6.35 / 9.52	6.35 / 12.7
Piping Length (Maximum)	m			20	30
Max Installation Height Difference	m			15	20

FVXS-F / RXS-G

Floor Standing Unit



ARC452A1



FVXS-F



RXS25,35G

- Unified Fan coil unit:** for Cooling Only and Heat Pump applications during installation, a dip switch on the remote controller can be set to indicate whether the fancoil is connected to a Heat Pump or Cooling Only system.
- Wireless remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 4 actions per day possible
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.

- Different levels of user access can be selected.
- Titanium apatite photocatalytic air purification filter
- Can be installed against a wall or recessed
- Dual air discharge flow for better air distribution
- ECONO mode decreases power consumption so that other appliances that need large power supply can be used
- Lightweight but sturdy design
- Connection to multi outdoor possible

HEAT PUMP				INVERTER		
Indoor Units				FVXS25F	FVXS35F	FVXS50F
Capacity	Cooling capacity	Minimum	kW	1.3	1.4	1.4
		Standard	kW	2.5	3.5	5.0
		Maximum	kW	3.0	3.8	5.6
	Heating capacity	Minimum	kW	1.3	1.4	1.4
		Standard	kW	3.4	4.5	5.8
		Maximum	kW	4.5	5.0	8.1
EER / COP	Cooling / Heating		4.39 / 4.30	3.43 / 3.69	3.23 / 3.63	
Annual energy consumption	kWh		285	510	775	
Energy Label	cooling / heating		A / A	A / A	A / A	
Dimensions	(Height x Width x Depth)		mm	600x700x210	600x700x210	600x700x210
Weight			kg	14	14	14
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.2 / 6.5 / 4.8 / 4.1	8.5 / 6.7 / 4.9 / 4.5	10.7 / 9.2 / 7.8 / 6.6
	Heating	H/M/L/SL	m³/min	8.8 / 6.9 / 5.0 / 4.4	9.4 / 7.3 / 5.2 / 4.7	11.8 / 10.1 / 8.5 / 7.1
Sound Power	Cooling	High	dBA	54	55	56
	Heating	High	dBA	54	55	57
Sound Pressure	Cooling	H/M/L/SL	dBA	38 / 32 / 26 / 23	39 / 33 / 27 / 24	44 / 40 / 36 / 32
	Heating	H/M/L/SL	dBA	38 / 32 / 26 / 23	39 / 33 / 27 / 24	45 / 40 / 36 / 32
Refrigerant			Type	R-410A		
Power Supply				1~/220-240V/50Hz		
Controller				ARC452A1		

Outdoor Unit			RXS25G	RXS35G	RXS50G
Dimensions	(Height x Width x Depth)		mm	550x765x285	550x765x285
Weight			kg	34	34
Operation Range	Cooling	Min~Max	°CDB	-10~46	-10~46
	Heating	Min~Max	°CWB	-15~20	-15~20
Sound Power	Cooling	dBA		61	63
Sound Pressure (Low)	Cooling	dBA		43	44
	Heating	dBA		44	45
Sound Pressure (High)	Cooling	dBA		46	48
	Heating	dBA		47	48
Refrigerant			Type	R-410A	
Power Supply				1~/220-240V/50Hz	
Piping connections	Liquid (OD)/Gas	mm	635/9.52/18		635/12.7/18
Piping Length (Maximum)		m	20		30
Max Installation Height Difference		m	15		20



INVERTER

FVQ-B / RZQS-D

Floor Standing Unit



FVQ-B



RZQS100, 125D

- Ideal solution for areas without false ceilings, or with limited floor/wall space
- Very efficient for use in rooms with high ceilings
- Quiet operation: down to 35 dBA sound pressure level (71 class)
- Auto-swing function ensures efficient air and temperature distribution

HEAT PUMP				COMFORT INVERTER		
Indoor Units				FVQ71B	FVQ100B	FVQ125B
Capacity	Cooling capacity	Standard	kW	7.1	10.0	12.5
	Heating capacity	Standard	kW	8.0	11.2	14.0
EER / COP	Cooling / Heating			2.81	3.21	2.81
Annual energy consumption	kWh			1265	1779	2225
Energy Label	cooling / heating			C / C		
Dimensions	(Height x Width x Depth)		mm	1850x600x270	1850x600x350	1850x600x350
Weight	kg			39	46	47
Sound Power	Cooling	High/Low	dBA	54 / 48	60 / 54	62 / 56
	Heating	High/Low	dBA	54 / 48	60 / 54	62 / 56
Sound Pressure	Cooling	High/Low	dBA	42 / 36	48 / 42	50 / 44
	Heating	High/Low	dBA	42 / 36	48 / 42	50 / 44
Refrigerant	Type			R-410A		
Power Supply				220-240V/50Hz		
Controller				BRC1C61		

Outdoor Unit			RZQS71DV1	RZQS100DV1	RZQS125DV1
Dimensions	(Height x Width x Depth)		mm	770x900x320	1170x900x320
Weight	kg			68	103
Operation Range	Cooling	Min-Max	°CDB	-5~46	
	Heating	Min-Max	°CWB		-15~15.5
Sound Power	Cooling		dBA	65	67
Sound Pressure (Standard)	Cooling		dBA	49	51
	Heating		dBA	51	55
Sound Level (Night quiet)	Sound Pressure		dBA	47	49
Refrigerant	Type			R-410A	
Power Supply				1~/220-240V/50Hz	
Piping connections	Liquid (OD)/Gas/Drain	mm		9.52 / 15.9 / 26	
Piping Length (Maximum)	m		30	50	
Max interunit level difference	m			0.5	
Max installation height difference	m		15	30	

FVQ-B / RZQ-D/B9W1

Floor Standing Unit



FVQ-B



RZQ100, 125D

- Seasonal Inverter Technology:** first Sky Air range in the market optimized for seasonal efficiency.
- Ideal solution for areas without false ceilings, or with limited floor/wall space
- Very efficient for use in rooms with high ceilings
- Quiet operation: down to 35 dBA sound pressure level (71 class)
- Auto-swing function ensures efficient air and temperature distribution

HEAT PUMP				SEASONAL INVERTER		
Indoor Units				FVQ71B	FVQ100B	FVQ125B
Capacity	Cooling capacity	Standard	kW	7.1	10.0	12.5
	Heating capacity	Standard	kW	8.0	11.2	14.0
Nominal	EER / COP	Cooling / Heating			TBC	
	Annual energy consumption		kWh		TBC	
	Energy Label	Cooling / Heating			TBC	
Seasonal (*)	SEER / SCOP	Cooling / Heating			TBC	
Dimensions	(Height x Width x Depth)		mm	1850x600x270	1850x600x350	1850x600x350
Weight		kg		39	46	47
Sound Power	Cooling	High/Low	dBA	54 / 48	60 / 54	62 / 56
	Heating	High/Low	dBA	54 / 48	60 / 54	62 / 56
Sound Pressure	Cooling	High/Low	dBA	42 / 36	48 / 42	50 / 44
	Heating	High/Low	dBA	42 / 36	48 / 42	50 / 44
Refrigerant			Type	R-410A		
Power Supply				220-240V/50Hz		
Controller				BRC1C61		

Outdoor Unit			RZQ71D3V1	RZQ100D9V1	RZQ100B9W1	RZQ125D9V1	RZQ125B9W1
Dimensions	(Height x Width x Depth)	mm	770x900x320	1345x900x320		1345x900x320	
Weight	kg		67	108	106	108	106
Sound pressure level	Cooling (Night quiet mode)	dBA	48 (43)	50 (45)	50 (45)	51 (45)	50 (45)
	Heating	dBA	50	52	52	53	52
Sound power level	Cooling	dBA	64	65		67	66
Operation Range	Cooling	Min~Max	°CDB		-15.0~50.0		
	Heating	Min~Max	°CWB		-20.0~15.5		
Refrigerant			Type	R-410A			
Power Supply				1~/230V/50Hz	1~/230V/50Hz	3N~/400V/50Hz	1~/230V/50Hz
Piping connections	Liquid (OD)/Gas/Drain	mm		9.52 / 15.9 / 26			
Piping Length (Maximum)	m		50			75	
Max. interunit level difference	m			0.5			
Max Installation Height Difference	m			30			

(*) Seasonal efficiencies are calculated based on draft PrEn 14825: 2009 (under inquiry stage). Data are subject to change.

FDKS-E/C / RKS-G/F

Slim Concealed Ceiling Unit



ARC433A8



FDKS-E



RKS25,35G



RKS50G,RKS60F

- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- Powerful operation:** activates the maximum air volume for 20 minutes. After this, the air conditioner automatically returns to its original setting.
- Compact dimensions, can easily be mounted in a ceiling void due to 200mm height
- Standard suction filter
- Outdoor unit quiet operation: "Quiet" buttons on the remote control lower the operation sound of the indoor and/or outdoor unit by 3dB(A)
- Night quiet mode (only in multi application and cooling only mode)
- Medium external static pressure facilitates unit use with flexible ducts of varying lengths
- Rear return or bare return air possible
- Optional discharge air flangers available
- Connection to multi outdoor possible



COOLING ONLY				INVERTER			
Indoor Units				FDKS25E	FDKS35E	FDKS50C	FDKS60C
Capacity	Cooling capacity	Minimum	kW	1.3	1.4	1.7	1.7
		Standard	kW	2.4	3.4	5.0	6.0
		Maximum	kW	3.0	3.8	5.3	6.5
EER	Nominal			3.48	3.12	3.03	2.82
Annual energy consumption	kWh			3.45	5.45	8.25	1065
Energy Label	cooling			A	B	B	C
Dimensions	(Height x Width x Depth)		mm	200x700x620	200x700x620	200x900x620	200x1100x620
Weight	kg			21.0	21.0	27.0	30.0
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.7 / 8.0 / 7.3 / 6.2	8.7 / 8.0 / 7.3 / 6.2	12.0 / 11.0 / 10.0 / 8.4	16.0 / 14.8 / 13.5 / 11.2
Sound Power	Cooling	High	dBA	53.0	53.0	55.0	56.0
Sound Pressure	Cooling	H/M/L/SL	dBA	35.0 / 33.0 / 31.0 / 29.0	35.0 / 33.0 / 31.0 / 29.0	37.0 / 35.0 / 33.0 / 31.0	38.0 / 36.0 / 34.0 / 32.0
External Static Pressure	High	Pa		30		40	
Refrigerant	Type			R-410A			
Power Supply				1~/220-240/220-230V/50/60Hz			
Controller				ARC433A8			

Outdoor Unit			RKS25G	RKS35G	RKS50G	RKS60F	
Dimensions	(Height x Width x Depth)		mm	550x765x285	550x765x285	735x825x300	735x825x300
Weight	kg			34	34	48	47
Operation Range	Cooling	Min-Max	°CDB	-10~46	-10~46	-10~46	-10~46
Sound Power	Cooling	dBA		61	63	62	63
Sound Pressure (Low)	Cooling	dBA		43	44	44	46
Sound Pressure (High)	Cooling	dBA		46	48	48	49
ESP	High/Medium/Low	Pa		8.7 / 8 / 7.3		12 / 11 / 10	16 / 14.8 / 13.5
Refrigerant	Type			R-410A			
Power Supply	1~/220-240V/50Hz			1~/220-240V/50Hz	220-240V/50Hz	1~/220-240V/50Hz	
Piping connections	Liquid (OD)/Gas	mm		6.35 / 9.52		6.35 / 12.7	
Piping Length (Maximum)	m			20		30	
Max Installation Height Difference	m			15		20	

FDXS-E/C / RXS-G/F

Slim Concealed Ceiling Unit



ARC433A7

FDXS25,35E

RXS25,35G

RXS50G,RXS60F

- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- Powerful operation:** activates the maximum air volume for 20 minutes. After this, the air conditioner automatically returns to its original setting.
- Compact dimensions, can easily be mounted in a ceiling void due to 200mm height
- Standard suction filter

- Outdoor unit quiet operation: "Quiet" buttons on the remote control lower the operation sound of the indoor and/or outdoor unit by 3dB(A)
- Night quiet mode (only in multi application and cooling only mode)
- Medium external static pressure facilitates unit use with flexible ducts of varying lengths
- Rear return or bare return air possible
- Optional discharge air flangers available
- Connection to multi outdoor possible

HEAT PUMP				INVERTER			
Indoor Units				FDXS25E	FDXS35E	FDXS50C	FDXS60C
Capacity	Cooling capacity	Minimum	kW	1.3	1.4	1.7	1.7
		Standard	kW	2.4	3.4	5.0	6.0
		Maximum	kW	3.0	3.8	5.3	6.5
	Heating capacity	Minimum	kW	1.3	1.4	1.7	1.7
		Standard	kW	3.2	4.0	5.8	7.0
		Maximum	kW	4.5	5.0	6.0	8.0
EER / COP	Cooling / Heating			3.48 / 3.52	3.12 / 3.39	3.03 / 3.02	2.82 / 3.02
Annual energy consumption	kWh			345	545	825	1065
Energy Label	cooling / heating			A / B	B / C	B / D	C / D
Dimensions	(Height x Width x Depth)		mm	200x700x620	200x700x620	200x900x620	200x1100x620
Weight	kg			21.0	21.0	27.0	30.0
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.7 / 8.0 / 7.3 / 6.2	8.7 / 8.0 / 7.3 / 6.2	12.0 / 11.0 / 10.0 / 8.4	16.0 / 14.8 / 13.5 / 11.2
	Heating	H/M/L/SL	m³/min	8.7 / 8.0 / 7.3 / 6.2	8.7 / 8.0 / 7.3 / 6.2	12.0 / 11.0 / 10.0 / 8.4	16.0 / 14.8 / 13.5 / 11.2
Sound Power	Cooling	High	dBA	53.0	53.0	55.0	56.0
	Heating	High	dBA	53.0	53.0	55.0	56.0
Sound Pressure	Cooling	H/M/L/SL	dBA	35.0 / 33.0 / 31.0 / 29.0	35.0 / 33.0 / 31.0 / 29.0	37.0 / 35.0 / 33.0 / 31.0	38.0 / 36.0 / 34.0 / 32.0
	Heating	H/M/L/SL	dBA	35.0 / 33.0 / 31.0 / 29.0	35.0 / 33.0 / 31.0 / 29.0	37.0 / 35.0 / 33.0 / 31.0	38.0 / 36.0 / 34.0 / 32.0
External Static Pressure	High	Pa		30		40	
Refrigerant	Type			R-410A			
Power Supply	1~/220-240/220-230V/50/60Hz			1~/220-240/220-230V/50/60Hz	1~/220-240/220-230V/50/60Hz	220-240/220-230V/50/60Hz	220-240/220-230V/50/60Hz
Controller				ARC433A7			

Outdoor Unit			RXS25G	RXS35G	RXS50G	RXS60F
Dimensions	(Height x Width x Depth)		mm	550x765x285	550x765x285	735x825x300
Weight	kg			34	34	48
Operation Range	Cooling	Min~Max	°CDB	-10~46	-10~46	-10~46
	Heating	Min~Max	°CWB	-15~20	-15~20	-15~18
Sound Power	Cooling	dBA		61	63	62
Sound Pressure (Low)	Cooling	dBA		43	44	44
	Heating	dBA		44	45	45
Sound Pressure (High)	Cooling	dBA		46	48	48
	Heating	dBA		47	48	49
Refrigerant	Type			R-410A		
Power Supply				1~/220-240V/50Hz		
Piping connections	Liquid (OD)/Gas	mm	6.35/9.52/18		6.35 / 12.7 / 18	
Piping Length (Maximum)	m		20		30	
Max Installation Height Difference	m		15		20	

FBQ-C / RKS-G/F

Concealed Ceiling Unit



BRC1D52



BRC1E51A



FBQ35,50C



RKS35G

- Reduction in power consumption thanks to DC inverter fans
- Improved comfort thanks to 3-step air flow control
- Possibility to change ESP through wired remote control, allows optimisation of the supply air volume
- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- Quiet operation
- Maximum external static pressure (ESP) is 100Pa
- Optional discharge and suction duct flangers available
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications

COOLING ONLY				INVERTER		
Indoor Units				FBQ35C	FBQ50C	FBQ60C
Capacity	Cooling capacity	Standard	kW	3.40	5.0	5.7
EER	Nominal			3.22		3.21
Annual energy consumption		kWh		528	776	888
Energy Label	cooling			A		
Dimensions	(Height x Width x Depth)		mm	300x700x700	300x1000x700	
Weight		kg		25		34
Air Flow Rate	Cooling	High/Low	m³/min	16 / 11		18 / 15
Sound Power	Cooling	High	dBA	63		57
Sound Pressure	Cooling	High/Low	dBA		37 / 29	
External Static Pressure		High/Medium/Low	Pa	70 / 30 / 30	100 / 30 / 30	
Refrigerant		Type		R-410A		
Power Supply				1~/230V/50Hz		
Decoration Panel	Model			BYBS45D		BYBS71D
	Colour			White		
HxDxW		mm		55x800x500	55x1100x500	
Weight		kg		3.5		4.5
Controller	Wired			BRC1D52 (standard) / BRC1E51A (optional)		

Outdoor Unit			RK35G	RKS50G	RKS60F
Dimensions	(Height x Width x Depth)	mm	550x765x285	735x825x300	735x825x300
Weight		kg	34	48	48
Operation Range	Cooling	Min-Max	°CDB	-10-46	-10-46
Sound Power	Cooling		dBA	62	61
Sound Pressure (Low)	Cooling		dBA	44	44
Sound Pressure (High)	Cooling		dBA	48	48
Refrigerant		Type		R-410A	
Power Supply			1~/220-240V/50Hz	1~/220-240V/50Hz	
Piping connections	Liquid (OD)/Gas	mm	63.5/9.52		63.5/12.7
Piping Length (Maximum)		m	20		30
Max Installation Height Difference		m	15		20

(*) A separate 1ph 5 amp power supply to the indoor unit is required.

FBQ-C / RXS-G/F

Concealed Ceiling Unit



BRC1D52



BRC1E51A



FBQ35,50C



RXS35G

- Reduction in power consumption thanks to DC inverter fans
- Improved comfort thanks to 3-step air flow control
- Possibility to change ESP through wired remote control, allows optimisation of the supply air volume
- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- Quiet operation
- Maximum external static pressure (ESP) is 100Pa
- Optional discharge and suction duct flangers available
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications

HEAT PUMP				INVERTER		
				FBQ35C	FBQ50C	FBQ60C
Capacity	Cooling capacity	Standard	kW	3.40	5.0	5.7
	Heating capacity	Standard	kW	4.0	6.0	7.0
EER / COP	Cooling / Heating			3.22 / 3.42	3.21 / 3.41	3.21 / 3.41
Annual energy consumption	kWh			528	776	888
Energy Label	cooling / heating			A / B		
Dimensions	(Height x Width x Depth)		mm	300x700x700	300x1000x700	
Weight			kg	25	34	
Air Flow Rate	Cooling	High/Low	m³/min	16 / 11	18 / 15	
	Heating	High/Low	m³/min	16 / 11	18 / 15	
Sound Power	Cooling	High	dBA	63	57	
Sound Pressure	Cooling	High/Low	dBA	37 / 29		
	Heating	High/Low	dBA	37 / 29		
External Static Pressure	High/Medium/Low		Pa	70 / 30 / 30	100 / 30 / 30	
Refrigerant			Type	R-410A		
Power Supply				1~230V/50Hz		
Decoration Panel	Model			BYBS45D	BYBS71D	
	Colour			White		
	HxWxD	mm		55x800x500	55x1100x500	
	Weight	kg		3.5	4.5	
Controller	Wired			BRC1D52 (standard) / BRC1E51A (optional)		

Outdoor Unit			RXS35G	RXS50G	RXS60F
Dimensions	(Height x Width x Depth)		mm	550x765x285	735x825x300
Weight			kg	34	48
Operation Range	Cooling	Min-Max	°CDB	-10~46	-10~46
	Heating	Min-Max	°CWB	-15~20	-15~20
Sound Power	Cooling		dBA	63	61
Sound Pressure (Low)	Cooling	dBA		44	46
	Heating	dBA		45	46
Sound Pressure (High)	Cooling	dBA		48	49
	Heating	dBA		48	49
Refrigerant	Type			R-410A	
Power Supply			1~(*)/220-240V/50Hz	1~/220-240V/50Hz	
Piping connections	Liquid (OD)/Gas	mm	63.5/9.52	63.5/12.7	
Piping Length (Maximum)	m		20	30	
Max Installation Height Difference	m		15	20	

(*) A separate 1ph 5 amp power supply to the indoor unit is required.



INVERTER

FBQ-C / RZQS-D

Concealed Ceiling Unit



BRC1D52



BRC1E51A



FBQ100,125,140C



RZQS100,125,140D

- Reduction in power consumption thanks to DC inverter fans
- Improved comfort thanks to 3-step air flow control
- Possibility to change ESP through wired remote control, allows optimisation of the supply air volume
- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- Quiet operation
- Maximum external static pressure (ESP) is 100Pa
- Optional discharge and suction duct flangers available
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications

HEAT PUMP				COMFORT INVERTER					
Indoor Units				FBQ71C	FBQ100C	FBQ125C	FBQ140C		
Capacity	Cooling capacity	Standard	kW	7.1	10.0	12.5	13.4		
	Heating capacity	Standard	kW	8.0	11.2	14.0	15.0		
EER / COP	Cooling / Heating			3.26 / 3.55	3.3 / 3.65	3.14 / 3.41	2.81 / 3.21		
Annual energy consumption			kWh	1,089	1,515	1,990	2,384		
Energy Label	cooling / heating			A / B	A / A	B / B	C / C		
Dimensions	(Height x Width x Depth)		mm	300x1000x700	300x1400x700				
Weight			kg	34	45				
Air Flow Rate	Cooling	High/Low	m³/min	18 / 15	32 / 23	33 / 28			
	Heating	High/Low	m³/min	18 / 15	32 / 23	39 / 28	41 / 29		
Sound Power	Cooling	High	dBA	57	61	66			
Sound Pressure	Cooling	High/Low	dBA	37 / 29	38 / 32	40 / 33			
	Heating	High/Low	dBA	37 / 29	38 / 32	40 / 33	41 / 34		
External Static Pressure	High/Medium/Low		Pa	100 / 30 / 30	120 / 40 / 40	120 / 50 / 50			
Refrigerant			Type	R-410A					
Power Supply				1~/230V/50Hz					
Decoration Panel	Model			BYBS71DJW1	BYBS125DJW1				
	Colour				White				
	HxWxD		mm	55x1100x500	55x1500x500				
	Weight		kg	4.5	6.5				
Controller	Wired			BRC1D52 (standard) / BRC1E51A (optional)					

Outdoor Unit			RZQS71DV1	RZQS100DV1	RZQS125DV1	RZQS140DV1
Dimensions	(Height x Width x Depth)	mm	770x900x320		1170x900x320	
Weight	kg		68		103	
Operation Range	Cooling	Min~Max	°CDB		-5~46	
	Heating	Min~Max	°CWB		-15~15.5	
Sound Power	Cooling	dBA	65		67	
Sound Pressure (Standard)	Cooling	dBA	49		51	
	Heating	dBA	51	55	53	52
Sound Level (Night quiet)	Sound Pressure	dBA	47		49	
Refrigerant	Type		R-410A			
Power Supply				1~/220-240V/50Hz		
Piping connections	Liquid (OD)/Gas/Drain	mm		9.52 / 15.9 / 26		
Piping Length (Maximum)	m		30	50		
Max interunit level difference	m			0.5		
Max Installation Height Difference	m		15	30		



Seasonal Inverter

INVERTER

FBQ-C / RZQ-D/B9W1

Concealed Ceiling Unit



BRC1D52



BRC1E51A



FBQ100, 125, 140C



RZQ100, 125, 140D

- Reduction in power consumption thanks to DC inverter fans
- Improved comfort thanks to 3-step air flow control
- Possibility to change ESP through wired remote control, allows optimisation of the supply air volume
- Seasonal Inverter Technology:** first Sky Air range in the market optimized for seasonal efficiency.
- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.

- User Access:** different levels of user access can be selected.
- Quiet operation
- Maximum external static pressure (ESP) is 88Pa
- Optional discharge and suction duct flanger available
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications
- Communications, computer and server room cooling possible with EDP setting.
- Re-use of existing R22 and R407C piping possible. (See R22 Replacement leaflet)



HEAT PUMP				SEASONAL INVERTER										
Indoor Units				FBQ71C	FBQ100C		FBQ125C		FBQ140C					
Capacity	Cooling capacity	Standard	kW	7.1	10.0		12.5		13.4					
	Heating capacity	Standard	kW	8.0	11.2		14.0		15.5					
Nominal	EER / COP	Cooling / Heating		3.39 / 3.85	3.70 / 4.16	3.50 / 3.73	3.48 / 3.62	3.14 / 3.51	3.01 / 3.41	2.82 / 3.21				
	Annual energy consumption		kWh	1047	1351	1430	1796	1990	2226	2380				
	Energy Label	Cooling / Heating			A / A		A / A		B / B	C / C				
Seasonal (*)	SEER / SCOP	Cooling / Heating		3.73 / -	3.48 / -	3.42 / -	3.82 / -	3.56 / -	3.25 / -	3.22 / -				
Dimensions	(Height x Width x Depth)		mm	300x1000x700	300x1400x700									
Weight		kg		34	45									
Air Flow Rate	Cooling	High/Low	m³/min	18 / 15	32 / 23		39 / 28		41 / 29					
	Heating	High/Low	m³/min	18 / 15	32 / 23		39 / 28		41 / 29					
Sound Power	Cooling	High	dBA	57	61		66		66					
Sound Pressure	Cooling	High/Low	dBA	37 / 29	38 / 32		40 / 33		41 / 34					
	Heating	High/Low	dBA	37 / 29	38 / 32		40 / 33		41 / 34					
External Static Pressure	High/Medium/Low		Pa	100 / 30 / 30	120 / 40 / 40		120 / 50 / 50		120 / 50 / 50					
Refrigerant				Type	R-410A									
Power Supply					1~/230V/50Hz									
Decoration Panel	Model			BYBS71DJW1	BYBS125DJW1									
	Colour				White									
	HxWxD		mm	55x1100x500	55x1500x500									
	Weight		kg	4.5	6.5									
Controller	Wired				BRC1D52 (standard) / BRC1E51A (optional)									

Outdoor Unit			RZQ71D3V1	RZQ100D9V1	RZQ100B9W1	RZQ125D9V1	RZQ125B9W1	RZQ140D9V1	RZQ140B9W1	
Dimensions	(Height x Width x Depth)		mm	770x900x320	1345x900x320	1345x900x320	1345x900x320	1345x900x320	1345x900x320	
Weight		kg		67	108	106	108	106	108	
Operation Range	Cooling	Min-Max	°CDB			-15.0~50.0				
	Heating	Min-Max	°CWB			-20.0~15.5				
Sound Power	Cooling	dBA		64	65	67	66	68	66	
Sound Pressure (Standard)	Cooling	dBA		48	50	51	50	51	50	
	Heating	dBA		50	52	53	52	53	52	
Sound Level (Night quiet)	Sound Pressure	dBA		43	45			46	45	
Refrigerant	Type			R-410A						
Power Supply	1~/220-240V/50Hz			1~/220-240V/50Hz	3N~/400V/50Hz	1~/220-240V/50Hz	3N~/400V/50Hz	1~/220-240V/50Hz	3N~/400V/50Hz	
Piping connections	Liquid (OD)/Gas/Drain				9.52 / 15.9 / 26					
Piping Length (Maximum)	m			50	75					
Max. internunit level difference	m				0.5					
Max installation height difference	m				30					

(*) Seasonal efficiencies are calculated based on draft PrEn 14825: 2009 (under inquiry stage). Data are subject to change.



Comfort Inverter

INVERTER

FDQ-B / RZQS-D

Concealed Ceiling Unit



BRC1D52

BRC1E51A

FDQ125B

RZQS125D

- **Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- **BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- **Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- **User Access:** different levels of user access can be selected.
- Ideal for use in larger areas
- Maximum external static pressure (ESP) of 150Pa
- Suitable for Twin, Triple and Double Twin applications

HEAT PUMP			COMFORT INVERTER
Indoor Units			FDQ125B
Nominal Capacity	Cooling capacity Standard	kW	12.5
	Heating capacity Standard	kW	14.0
Annual energy consumption		kWh	2225
EER / COP	Cooling / Heating		2.81 / 3.43
Energy Label	cooling / heating		C / B
Dimensions	(Height x Width x Depth)	mm	350x1400x662
Weight	kg		59.0
Air Flow Rate	Cooling	Medium	m³/min
	Heating	Medium	m³/min
Sound Power	Cooling	Medium	dBA
Sound Pressure	Cooling	High	dBA
	Heating	Low	dBA
Refrigerant		Type	R-410A
Power Supply			1~/230V/50Hz
Controller	Wired		BRC1D52 (standard) / BRC1E51A (optional)
Outdoor Unit			RZQS125DV1
Dimensions	(Height x Width x Depth)	mm	1170x900x320
Weight	kg		103
Sound pressure level	Cooling (Night quiet mode)	dBA	51 (49)
	Heating	dBA	53
Sound power level	Cooling	dBA	67
Operation Range	Cooling	Min~Max	°CDB
	Heating	Min~Max	°CWB
Refrigerant		Type	R-410A
Power Supply			1~/230V/50Hz
Piping connections	Liquid (OD)/Gas	mm	9.52 / 15.9 / 26
Piping Length (Maximum)		m	50
Max Installation Height Difference		m	30



Seasonal Inverter

INVERTER

FDQ-B / RZQ-D/B9W1

Concealed Ceiling Unit



BRC1D52



BRC1E51A



FDQ-B



RZQ125D

- Seasonal Inverter Technology:** first Sky Air range in the market optimized for seasonal efficiency.
- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRCA1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- Ideal for use in larger areas
- Maximum external static pressure (ESP) of 150Pa
- Suitable for Twin, Triple and Double Twin applications
- Comms, computer and server room cooling possible with EDP setting (RZQ125 only).
- Re-use of existing R22 and R407C piping possible. (See R22 Replacement leaflet)



HEAT PUMP				SEASONAL INVERTER	
Indoor Units				FDQ125B	
Nominal Capacity	Cooling capacity	Standard	kW		12.5
	Heating capacity	Standard	kW		14.0
Nominal	EER / COP	Cooling / Heating		3.16 / 3.88	3.01 / 3.79
	Annual energy consumption	kWh			1978
	Energy Label	Cooling / Heating			B / A
Seasonal (*)	SEER / SCOP	Cooling / Heating		3.50 / -	3.39 / -
Dimensions	(Height x Width x Depth)		mm	350x1400x662	
Weight				59.0	
Air Flow Rate	Cooling	Medium	m³/min		43.0
	Heating	Medium	m³/min		43.0
Sound Power	Cooling	Medium	dBA		75.0
Sound Pressure	Cooling	High	dBA		44.0
	Heating	Low	dBA		44.0
External Static Pressure	High			150	
Refrigerant				R-410A	
Power Supply				1~/230V/50Hz	
Controller	Wired			BRC1D52 (standard) / BRC1E51A (optional)	

Outdoor Unit			RZQ125D9V1	RZQ125B9W1
Dimensions	(Height x Width x Depth)	mm		1345x900x320
Weight	kg		108	106
Sound pressure (standard)	Cooling	dBA	51	50
	Heating	dBA	53	52
Sound power level	Cooling	dBA	67	66
Operation Range	Cooling	Min~Max °CDB		-15.0~50.0
	Heating	Min~Max °CWB		-20.0~15.5
Refrigerant	Type			R-410A
Power Supply	(*) 1~/220-240V/50Hz			(*) 3N~/400V/50Hz
Piping connections	Liquid (OD)/Gas	mm		9.52 / 15.9 / 26
Piping Length (Maximum)		m		75
Max Installation Height Difference		m		30

(*) Seasonal efficiencies are calculated based on draft PrEn 14825: 2009 (under inquiry stage). Data are subject to change.

(**) A separate 15 amp power supply to the indoor unit is required.



INVERTER

FDQ-B / RZQ-C

Concealed Ceiling Unit



BRC1D52



BRC1E51A



FDQ-B



RZQ200,250C

- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.
- Ideal for use in larger areas
- Maximum external static pressure (ESP) of 250Pa
- Suitable for Twin, Triple and Double Twin applications
- Re-use of existing R22 and R407C piping possible.
(See R22 Replacement leaflet)



HEAT PUMP				SUPER INVERTER	
Indoor Units				FDQ200B	FDQ250B
Nominal Capacity	Cooling capacity	Standard	kW	20.0	24.1
	Heating capacity	Standard	kW	23.0	26.4
EER / COP	Cooling / Heating			3.21 / 3.41	2.81 / 3.21
Annual energy consumption	kWh			3115	4290
Energy Label	cooling / heating			A / B	C / C
Dimensions	(Height x Width x Depth)		mm	450x1400x900	450x1400x900
Weight			kg	93.0	93.0
Air Flow Rate	Cooling	Medium	m³/min	69.0	89.0
	Heating	Medium	m³/min	69.0	89.0
Sound Power	Cooling	Medium	dBA	81.0	82.0
Sound Pressure	Cooling	High	dBA	45.0	47.0
	Heating	Low	dBA	45.0	47.0
External Static Pressure	High	Pa		250	
Refrigerant			Type	R-410A	
Power Supply				1~/230V/50Hz	
Controller	Wired			BRC1D52 (standard) / BRC1E51A (optional)	

Outdoor Unit			RZQ200C	RZQ250C
Dimensions	(Height x Width x Depth)		mm	1680x930x765
Weight			kg	183
Sound pressure (standard)	Cooling	dBA		57
	Heating	dBA		57
Sound power level	Cooling	dBA		78
Operation Range	Cooling	Min~Max	°CDB	-5.0~46.0
	Heating	Min~Max	°CWB	-15.0~15.0
Refrigerant			Type	R-410A
Power Supply				(*)3N~/380-415V/50Hz
Piping connections	Liquid (OD)/Gas	mm	9.5 / 22,2 / -	12.7 / 22,2 / -
Piping Length (Maximum)		m		100
Max Installation Height Difference		m		30

(*) A separate 15 amp power supply to the indoor unit is required.



FFQ-B / RKS-G/F

4-Way Blow Ceiling Mounted Cassette (600mm x 600mm)



BRC1D52



BRC1E51A



BRC7E531



FFQ-B



RKS25,35G

- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- New and extremely compact casing (575mm in width and depth) enables unit to fit flush into ceilings and match standard architectural modules, without cutting ceiling tiles
- Modern style decoration panel in white (RAL9010)
- Extremely quiet in operation
- Possibility to shut 1 or 2 flaps for easy installation in corners
- Auto-swing function ensures efficient air and temperature distribution and prevents ceiling soiling.
- Excellent low draught characteristics
- Easy installation and maintenance
- The switch box can be reached by simply removing the suction grille; therefore maintenance can be done very easily.
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications

COOLING ONLY				INVERTER			
				FFQ25BV	FFQ35BV	FFQ50BV	FFQ60BV
Indoor Units	Capacity	Cooling capacity Standard	kW	2.5	3.4	4.7	5.8
	EER	Nominal		3.42	3.09	2.61	2.80
Annual energy consumption		kWh		365	550	900	1035
Energy Label	cooling		A	B	D	D	
Dimensions	(Height x Width x Depth)	mm	286x575x575	286x575x575	286x575x575	286x575x575	286x575x575
Weight	kg		17.5	17.5	17.5	17.5	17.5
Air Flow Rate	Cooling	High/Low	m³/min	9.0 / 6.5	10.0 / 6.5	12.0 / 8.0	15.0 / 10.0
Sound Power	Cooling	High	dBA	46.5	49.0	53.0	58.0
Sound Pressure	Cooling	High/Low	dBA	29.5 / 24.5	32.0 / 25.0	36.0 / 27.0	41.0 / 32.0
Refrigerant		Type		R-410A	R-410A	R-410A	R-410A
Power Supply				1~/230V/50Hz	1~/230V/50Hz	1~/230V/50Hz	1~/230V/50Hz
Decoration Panel	Model			BYFQ60BAW1	BYFQ60BAW1	BYFQ60BAW1	BYFQ60BAW1
	Colour			White(RAL 9010)	White(RAL 9010)	White(RAL 9010)	White(RAL 9010)
HxDxW	mm			55x700x700	55x700x700	55x700x700	55x700x700
Weight	kg			2.7	2.7	2.7	2.7
Controller	Wired/Wireless			BRC1D52 (standard) BRC1E51A (optional)		BRC7E531 (optional)	

			RKS25G	RKS35G	RKS50G	RKS60F
Dimensions	(Height x Width x Depth)	mm	550x765x285	550x765x285	735x825x300	735x825x300
Weight	kg		34	34	48	47
Operation Range	Cooling	Min~Max	°CDB	-10~46	-10~46	-10~46
Sound Power	Cooling	dBA		61	62	61
Sound Pressure (Low)	Cooling	dBA		43	44	44
Sound Pressure (High)	Cooling	dBA		46	48	49
Refrigerant		Type		R-410A	R-410A	R-410A
Power Supply				1~/220~240V/50Hz	1~/220~240V/50Hz	1~/220~240V/50Hz
Piping connections	Liquid (OD)/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 12.7
Piping Length (Maximum)		m	20	20	30	30
Max Installation Height Difference		m	15	15	20	20

FFQ-B / RXS-G/F

4-Way Blow Ceiling Mounted Cassette (600mm x 600mm)



- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- New and extremely compact casing (575mm in width and depth) enables unit to fit flush into ceilings and match standard architectural modules, without cutting ceiling tiles
- Modern style decoration panel in white (RAL9010)
- Extremely quiet in operation
- Possibility to shut 1 or 2 flaps for easy installation in corners
- Auto-swing function ensures efficient air and temperature distribution and prevents ceiling soiling.
- Excellent low draught characteristics
- Easy installation and maintenance
- The switch box can be reached by simply removing the suction grille; therefore maintenance can be done very easily.
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications

HEAT PUMP				INVERTER			
Indoor Units				FFQ25BV	FFQ35BV	FFQ50BV	FFQ60BV
Capacity	Cooling capacity	Standard	kW	2.5	3.4	4.7	5.8
	Heating capacity	Standard	kW	3.2	4.0	5.5	7.0
EER / COP	Cooling / Heating			3.42 / 3.48	3.09 / 3.33	2.61 / 2.81	2.80 / 2.81
Annual energy consumption	kWh			365	550	900	1035
Energy Label	cooling / heating			A / B	B / C	D / D	D / D
Dimensions	(Height x Width x Depth)		mm	286x575x575	286x575x575	286x575x575	286x575x575
Weight			kg	17.5	17.5	17.5	17.5
Air Flow Rate	Cooling	High/Low	m³/min	9.0 / 6.5	10.0 / 6.5	12.0 / 8.0	15.0 / 10.0
	Heating	High/Low	m³/min	9.0 / 6.5	10.0 / 6.5	12.0 / 8.0	15.0 / 10.0
Sound Power	Cooling	High	dBA	46.5	49.0	53.0	58.0
Sound Pressure	Cooling	High/Low	dBA	29.5 / 24.5	32.0 / 25.0	36.0 / 27.0	41.0 / 32.0
	Heating	High/Low	dBA	29.5 / 24.5	32.0 / 25.0	36.0 / 27.0	41.0 / 32.0
Refrigerant			Type	R-410A	R-410A	R-410A	R-410A
Power Supply				1~/230V/50Hz	1~/230V/50Hz	1~/230V/50Hz	1~/230V/50Hz
Decoration Panel	Model			BYFQ60BAW1	BYFQ60BAW1	BYFQ60BAW1	BYFQ60BAW1
	Colour			White(RAL 9010)	White(RAL 9010)	White(RAL 9010)	White(RAL 9010)
HxWxD	mm			55x700x700	55x700x700	55x700x700	55x700x700
Weight	kg			2.7	2.7	2.7	2.7
Controller	Wired/Wireless			BRC1D52 (standard) BRC1E51A (optional)		BRC7E530 (optional)	

Outdoor Unit			RXS25G	RXS35G	RXS50G	RXS60F	
Dimensions	(Height x Width x Depth)		mm	550x765x285	550x765x285	735x825x300	735x825x300
Weight	kg			34	34	48	48
Operation Range	Cooling	Min~Max	°CDB	-10~46	-10~46	-10~46	-10~46
	Heating	Min~Max	°CWB	-15~20	-15~20	-15~18	-15~18
Sound Power	Cooling		dBA	61	63	62	63
Sound Pressure (Low)	Cooling		dBA	43	44	44	46
	Heating		dBA	44	45	45	46
Sound Pressure (High)	Cooling		dBA	46	48	48	49
	Heating		dBA	47	48	48	49
Refrigerant			Type	R-410A	R-410A	R-410A	R-410A
Power Supply				1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz
Piping connections	Liquid (OD)/Gas	mm		6.35/9.52	6.35/9.52	6.35/12.7	6.35/12.7
Piping Length (Maximum)	m			20	20	30	30
Max Installation Height Difference	m			15	15	20	20



ROUND FLOW

Comfort Inverter

INVERTER

FCQH-D8 / RZQS-D

High Efficiency Round Flow Cassette



BRC1D52



BRC1E51A



BRC7F532F



FCQH100,125,140D8



RZQS100,125,140D

- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- Selfcleaning Panel (accessory)** – The round filter in the panel automatically cleans itself once per day. Simplicity of upkeep means optimum energy efficiency and maximum comfort without the need for expensive or time-consuming maintenance. Energy saving up to 30%.
- D3 Net connection as standard
- High efficiency
- Modern style decoration panel in pure white with grey louvres. Also available in white with white louvres
- 360° air discharge ensures uniform air flow and temperature distribution
- Air discharge from the corners avoids dead zones that may be subject to temperature differences
- Comfortable horizontal air discharge ensures draught free operation and prevents ceiling soiling
- 23 different air flow patterns possible
- Fresh air intake: standard knockout and optional kit
- Suitable for Twin, Triple and Double Twin applications

HEAT PUMP				COMFORT INVERTER					
Indoor Units				FCQH71D8	FCQH100D8	FCQH125D8	FCQH140D8		
Capacity	Cooling capacity	Standard	kW	7.1	10.0	12.5	14.0		
	Heating capacity	Standard	kW	8.0	11.2	14.0	16.0		
EER / COP	Cooling / Heating			3.3 / 3.7	3.45 / 3.80	3.22 / 3.69	3.01 / 3.41		
Annual energy consumption	kWh			1,076	1449	1940	2326		
Energy Label	cooling / heating			A / A		B / B			
Dimensions	(Height x Width x Depth)		mm	246x840x840	288x840x840				
Weight	kg			23	25				
Air Flow Rate	Cooling	High/Low	m³/min	21.9 / 12.1	34.2 / 17.6	34.2 / 21.2	34.2 / 23.8		
	Heating	High/Low	m³/min	21.9 / 12.1	34.2 / 17.6	34.2 / 21.3	34.2 / 23.9		
Sound Power	Cooling	High	dBA	54	62				
Sound Pressure	Cooling	High/Low	dBA	36 / 28	45 / 32	45 / 36	45 / 38		
	Heating	High/Low	dBA	36 / 28	45 / 32	45 / 36	45 / 38		
Refrigerant	Type			R-410A					
Power Supply	1~/220-240V;220V/50Hz;60Hz								
Decoration Panel	Model			BYCQ140CW1 ¹ / BYCQ140CW1W ² / BYCQ140CGW1 ³					
	Colour			Pure white (RAL 9010)					
	HxWxD		mm	50x950x950 / 50x950x950 / 130x950x950					
	Weight		kg	5.5 / 5.5 / 11.5					
Controller	Wired/Wireless			BRC1D52 (standard)	BRC7F532F (optional)				
				BRC1E51A (optional)					

Outdoor Unit			RZQS71DV1	RZQS100DV1	RZQS125DV1	RZQS140DV1		
Dimensions	(Height x Width x Depth)		mm	770x900x320	1170x900x320			
Weight	kg			68	103			
Operation Range	Cooling	Min-Max	°CDB	-5~46				
	Heating	Min-Max	°CWB	-15~15.5				
Sound Power	Cooling	dBA		65	67			
Sound Pressure (Standard)	Cooling	dBA		49	51			
	Heating	dBA		51	55			
Sound Level (Night quiet)	Sound Pressure	dBA		47	49			
Refrigerant	Type			R-410A				
Power Supply	1~/220-240V/50Hz							
Piping connections	Liquid (OD)/Gas/Drain		9.52 / 15.9 / 26					
Piping Length (Maximum)	m		30	50				
Max. interunit level difference	m			0.5				
Max installation height difference	m		15	30				

¹Pure white standard panel with grey louvres; ²Pure white standard panel with white louvres; ³Pure white auto cleaning panel



Seasonal Inverter

INVERTER

FCQH-D8 / RZQ-D/B9W1

High Efficiency Round Flow Cassette



BRC1D52



BRC1E51A



BRC7F532F



FCQH100,125,140D8



RZQ100,125,140D

- Seasonal Inverter Technology:** first Sky Air range in the market optimized for seasonal efficiency.
- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost.
- User Access:** different levels of user access can be selected.
- Selfcleaning Panel (accessory) – The round filter in the panel automatically cleans itself once per day. Energy saving up to 30%.
- D3 Net connection as standard

- High efficiency
- Modern style decoration panel in pure white
- 360° air discharge ensures uniform air flow and temperature distribution
- Air discharge from the corners avoids dead zones that may be subject to temperature differences
- Comfortable horizontal air discharge ensures draught free operation and prevents ceiling soiling
- 23 different air flow patterns possible
- Fresh air intake: standard knockout and optional kit
- Communications, computer and server room cooling possible with EDP setting.
- Re-use of existing R22 and R407C piping possible. (See R22 Replacement leaflet)
- Suitable for Twin, Triple and Double Twin applications



HEAT PUMP				SEASONAL INVERTER						
Indoor Units				FCQH71D8	FCQH100D8	FCQH125D8	FCQH140D8			
Capacity	Cooling capacity	Standard	kW	7.1	10.0	12.5		14.0		
	Heating capacity	Standard	kW	8.0	11.2	14.0		16.0		
Nominal	EER / COP	Cooling / Heating		3.78 / 4.16	4.00 / 4.53	4.10 / 4.38	3.59 / 4.05	3.53 / 3.90		
	Annual energy consumption	kWh		940	1250	1220	1740	1770		
	Energy Label	Cooling / Heating				A / A		B / B		
Seasonal (*)	SEER / SCOP	Cooling / Heating		4.04 / -	3.71 / -	3.8 / -	3.92 / -	3.88 / -		
Dimensions	(Height x Width x Depth)		mm	246x840x840	288x840x840					
Weight			kg	23	25					
Air Flow Rate	Cooling	High/Low	m³/min	21.9 / 12.1	34.2 / 17.6	34.2 / 21.2	34.2 / 23.8			
	Heating	High/Low	m³/min	21.9 / 12.1	34.2 / 17.6	34.2 / 21.3	34.2 / 23.9			
Sound Power	Cooling	High	dBA	54	62					
Sound Pressure	Cooling	High/Low	dBA	36 / 28	45 / 32	45 / 36	45 / 38			
	Heating	High/Low	dBA	36 / 28	45 / 32	45 / 36	45 / 38			
Refrigerant			Type	R-410A						
Power Supply	1~/220-240V;220V/50Hz;60Hz									
Decoration Panel	Model			BYCQ140CW1 ¹ / BYCQ140CW1W ² / BYCQ140CGW1 ³						
	Colour			Pure white (RAL 9010)						
	HxWxD		mm	50x950x950 / 50x950x950 / 130x950x950						
	Weight		kg	5.5 / 5.5 / 11.5						
Controller	Wired/Wireless			BRC1D52 (standard) / BRC7F532F (optional) BRC1E51A (optional)						

Outdoor Unit			RZQ71D3V1	RZQ100D9V1	RZQ100B9W1	RZQ125D9V1	RZQ125B9W1	RZQ140D9V1	RZQ140B9W1
Dimensions	(Height x Width x Depth)		mm	770x900x320	1345x900x320	1345x900x320		1345x900x320	
Weight			kg	67	108	106	108	106	106
Operation Range	Cooling		°CDB	-15.0~50.0					
	Heating		°CWB	-20.0~15.5					
Sound Power	Cooling		dBA	64	65	67	66	68	66
Sound Pressure (Standard)	Cooling		dBA	48	50	51	50	51	50
	Heating		dBA	50	52	53	52	53	52
Sound Level (Night quiet)	Sound Pressure		dBA	43	45			46	45
Refrigerant			Type	R-410A					
Power Supply	1~/220-240V/50Hz			1~/220-240V/50Hz	3N~/400V/50Hz	1~/220-240V/50Hz	3N~/400V/50Hz	1~/220-240V/50Hz	3N~/400V/50Hz
Piping connections	Liquid (OD)/Gas/Drain			9.52 / 15.9 / 26					
Piping Length (Maximum)	m			50			75		
Max. interunit level difference	m					0.5			
Max installation height difference	m					30			

(*) Seasonal efficiencies are calculated based on draft PrEn 14825: 2009 (under inquiry stage). Data are subject to change.

¹ Pure white standard panel with grey louvres; ² Pure white standard panel with white louvres; ³ Pure white auto cleaning panel

FCQ-C8 / RKS-G/F

Low Height Round Flow Cassette



BRC1D52



BRC1E51A



BRC7F533F



FCQ-C8



RKS35G

- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.
- Selfcleaning Panel (accessory)** – The round filter in the panel automatically cleans itself once per day. Simplicity of upkeep means optimum energy efficiency and maximum comfort without the need for expensive or time-consuming maintenance. Energy saving up to 30%.

- D3 Net connection as standard
- Modern style decoration panel in pure white with grey louvres. Also available in white with white louvres.
- 360° air discharge ensures uniform air flow and temperature distribution
- Air discharge from the corners avoids dead zones that may be subject to temperature differences
- Comfortable horizontal air discharge ensures draughtfree operation and prevents ceiling soiling
- 23 different air flow patterns possible
- Reduced installation height: 214mm for class 35-50
- Fresh air intake: standard knockout and optional kit
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications

COOLING ONLY			INVERTER		
Indoor Units			FCQ35C8	FCQ50C8	FCQ60C8
Capacity	Cooling capacity	Standard kW	3.4	5.0	5.7
EER	Nominal		3.58	3.55	3.48
Annual energy consumption		kWh	475	705	820
Energy Label	cooling		A	A	A
Dimensions	(Height x Width x Depth)	mm	204x840x840	204x840x840	204x840x840
Weight	kg		19	19	19
Air Flow Rate	Cooling	High/Low m³/min	10.5 / 8.5	12.5 / 8.5	13.5 / 8.5
Sound Power	Cooling	High dBA	49	49	51
Sound Pressure	Cooling	High/Low dBA	31 / 27	31 / 27	33 / 28
Refrigerant		Type	R-410A	R-410A	R-410A
Power Supply			-		1~/220-240V/50/60Hz
Decoration Panel	Model		BYCQ140CW1 ¹ / BYCQ140CW1W ² / BYCQ140CGW1 ³		
	Colour		Pure white (RAL 9010)		
	HxWxD	mm	50x950x950 / 50x950x950 / 130x950x950		
	Weight	kg	5.5 / 5.5 / 11.5		
Controller	Wired/Wireless		BRC1D52 (standard) / BRC7F533F (optional) BRC1E51A (optional)		

Outdoor Unit			RKS35G	RKS50G	RKS60F
Dimensions	(Height x Width x Depth)	mm	550x765x285	735x825x300	735x825x300
Weight	kg		34	48	47
Operation Range	Cooling	Min~Max °CDB	-10~46	-10~46	-10~46
Sound Power	Cooling	dBA	62	61	63
Sound Pressure (Low)	Cooling	dBA	44	44	46
Sound Pressure (High)	Cooling	dBA	48	48	49
Refrigerant		Type	R-410A	R-410A	R-410A
Power Supply			1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz
Piping connections	Liquid (OD)/Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35/12.7
Piping Length (Maximum)	m		20	30	30
Max Installation Height Difference	m		15	20	20

¹Pure white standard panel with grey louvres; ²Pure white standard panel with white louvres; ³Pure white auto cleaning panel

FCQ-C8 / RXS-G/F

Low Height Round Flow Cassette



BRC1D52



BRC1E51A



BRC7F532F



FCQ-C8



RXS35G

- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.
- Selfcleaning Panel (accessory)** – The round filter in the panel automatically cleans itself once per day. Simplicity of upkeep means optimum energy efficiency and maximum comfort

without the need for expensive or time-consuming maintenance. Energy saving up to 30%.

- D3 Net connection as standard
- Modern style decoration panel in pure white with grey louvres. Also available in white with white louvres
- 360° air discharge ensures uniform air flow and temperature distribution
- Air discharge from the corners avoids dead zones that may be subject to temperature differences
- Comfortable horizontal air discharge ensures draughtfree operation and prevents ceiling soiling
- 23 different air flow patterns possible
- Reduced installation height: 214mm for class 35-50
- Fresh air intake: standard knockout and optional kit
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications

HEAT PUMP				INVERTER		
Indoor Units				FCQ35C8	FCQ50C8	FCQ60C8
Capacity	Cooling capacity	Standard	kW	3.4	5.0	5.7
	Heating capacity	Standard	kW	4.2	6.0	7.0
EER / COP	Cooling / Heating			3.58 / 3.41	3.55 / 3.70	3.48 / 3.52
Annual energy consumption			kWh	475	705	820
Energy Label	cooling / heating			A / B	A / A	A / B
Dimensions	(Height x Width x Depth)		mm	204x840x840	204x840x840	204x840x840
Weight			kg	19	19	19
Air Flow Rate	Cooling	High/Low	m³/min	10.5 / 8.5	12.5 / 8.5	13.5 / 8.5
	Heating	High/Low	m³/min	12.5 / 10.0	12.5 / 8.5	13.5 / 8.5
Sound Power	Cooling	High	dBA	49	49	51
Sound Pressure	Cooling	High/Low	dBA	31 / 27	31 / 27	33 / 28
	Heating	High/Low	dBA	31 / 27	31 / 27	33 / 28
Refrigerant			Type	R-410A		
Power Supply				1~/220-240V/50/60Hz		
Decoration Panel	Model			BYCQ140CW ¹ / BYCQ140CW1W ² / BYCQ140CGW ³		
	Colour			Pure white (RAL 9010)		
	HxWxD		mm	50x950x950 / 50x950x950 / 130x950x950		
	Weight		kg	5.5 / 5.5 / 11.5		
Controller	Wired/Wireless			BRC1D52 (standard) / BRC7F532F (optional) BRC1E51A (optional)		

Outdoor Unit			RXS35G	RXS50G	RXS60F
Dimensions	(Height x Width x Depth)		mm	550x765x285	735x825x300
Weight			kg	34	48
Operation Range	Cooling	Min~Max	°CDB	-10~46	-10~46
	Heating	Min~Max	°CWB	-15~20	-15~18
Sound Power	Cooling	dBA		63	63
Sound Pressure (Low)	Cooling	dBA		44	46
	Heating	dBA		45	46
Sound Pressure (High)	Cooling	dBA		48	49
	Heating	dBA		48	49
Refrigerant			Type	R-410A	
Power Supply				1~/220-240V/50Hz	
Piping connections	Liquid (OD)/Gas	mm	6.35/952	6.35/12.7	6.35/12.7
Piping Length (Maximum)		m	20	30	30
Max Installation Height Difference		m	15	20	20

¹Pure white standard panel with grey louvres; ²Pure white standard panel with white louvres; ³Pure white auto cleaning panel



ROUND FLOW

Comfort Inverter

INVERTER

FCQ-C8 / RZQS-D

Low Height Round Flow Cassette



BRC1D52



BRC1E51A



BRC7F532F



FCQ100,125,140C8



RZQS100,125,140D

- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.
- Selfcleaning Panel (accessory)** – The round filter in the panel automatically cleans itself once per day. Simplicity of upkeep means optimum energy efficiency and maximum comfort

without the need for expensive or time-consuming maintenance. Energy saving up to 30%.

- D3 Net connection as standard
- Modern style decoration panel in pure white with grey louvres. Also available in white with white louvres
- 360° air discharge ensures uniform air flow and temperature distribution
- Air discharge from the corners avoids dead zones that may be subject to temperature differences
- Comfortable horizontal air discharge ensures draught free operation and prevents ceiling soiling
- 23 different air flow patterns possible
- Fresh air intake: standard knockout and optional kit
- Reduced installation height: 214mm for class 71
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications

HEAT PUMP				COMFORT INVERTER			
Indoor Units		FCQ71C8	FCQ100C8	FCQ125C8	FCQ140C8		
Capacity	Cooling capacity	Standard kW	7.1	10.0	12.5	14.0	
	Heating capacity	Standard kW	8.0	11.2	14.0	16.0	
EER / COP	Cooling / Heating		3.11 / 3.41	3.11 / 3.41	3.11 / 3.45	2.61 / 3.21	
Annual energy consumption		kWh	1,141	1,608	2,010	2,680	
Energy Label	cooling / heating			B / B		D / C	
Dimensions	(Height x Width x Depth)	mm	204x840x840		246x840x840		
Weight	kg		21		23		
Air Flow Rate	Cooling	High/Low m³/min	15.5 / 9.0	23.5 / 16.0		27.5 / 19.0	
	Heating	High/Low m³/min	16.0 / 9.5	23.5 / 16.0		27.5 / 19.0	
Sound Power	Cooling	High dBA	51	54		58	
Sound Pressure	Cooling	High/Low dBA	33 / 28	37 / 32		41 / 35	
	Heating	High/Low dBA	34 / 28	37 / 32	41 / 35	42 / 35	
Refrigerant	Type			R-410A			
Power Supply				1~/220-240V/50;60Hz			
Decoration Panel	Model			BYCQ140CW1 ¹ / BYCQ140CW1W ² / BYCQ140CGW1 ³			
	Colour			Pure white (RAL 9010)			
	HxWxD	mm		50x950x950 / 50x950x950 / 130x950x950			
	Weight	kg		5.5 / 5.5 / 11.5			
Controller	Wired/Wireless			BRC1D52 (standard) / BRC7F532F (optional) BRC1E51A (optional)			

Outdoor Unit			RZQS71DV1	RZQS100DV1	RZQS125DV1	RZQS140DV1
Dimensions	(Height x Width x Depth)	mm	770x900x320		1170x900x320	
Weight	kg		68		103	
Operation Range	Cooling	Min~Max °CDB		-5~46		
	Heating	Min~Max °CWB		-15~15.5		
Sound Power	Cooling	dBA	65	67	68	
Sound Pressure (Standard)	Cooling	dBA	49	51	52	
	Heating	dBA	51	55	53	54
Sound Level (Night quiet)	Sound Pressure	dBA	47	49	50	
Refrigerant	Type			R-410A		
Power Supply				1~/220-240V/50Hz		
Piping connections	Liquid (OD)/Gas/Drain	mm		9.52 / 15.9 / 26		
Piping Length (Maximum)	m		30		50	
Max Interunit Level Difference	m			0.5		
Max Installation Height Difference	m		15		30	

¹ Pure white standard panel with grey louvres; ² Pure white standard panel with white louvres; ³ Pure white auto cleaning panel



Seasonal Inverter

INVERTER

FCQ-C8 / RZQ-D/B9W1

Low Height Round Flow Cassette



BRC1D52



BRC1E51A



BRC7F532F



FCQ100,125,140C8



RZQ100,125,140D

- Seasonal Inverter Technology:** first Sky Air range in the market optimized for seasonal efficiency.
- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost.
- User Access:** different levels of user access can be selected.
- Selfcleaning Panel (accessory)** – The round filter in the panel automatically cleans itself once per day. Energy saving up to 30%.
- D3 Net connection as standard
- Modern style decoration panel in pure white

- 360° air discharge ensures uniform air flow and temperature distribution
- Air discharge from the corners avoids dead zones that may be subject to temperature differences
- Comfortable horizontal air discharge ensures draught free operation and prevents ceiling soiling
- 23 different air flow patterns possible
- Reduced installation height: 214mm for class 71
- Fresh air intake: standard knockout and optional kit
- Connection to multi outdoor possible
- Communications, computer and server room cooling possible with EDP setting.
- Re-use of existing R22 and R407C piping possible. (See R22 Replacement leaflet)
- Suitable for Twin, Triple and Double Twin applications



HEAT PUMP				SEASONAL INVERTER				
Indoor Units				FCQ71C8	FCQ100C8	FCQ125C8	FCQ140C8	
Capacity	Cooling capacity	Standard	kW	7.1	10.0	12.5	14.0	
	Heating capacity	Standard	kW	8.0	11.2	14.0	16.0	
Nominal	EER / COP	Cooling / Heating		3.36 / 3.62	3.79 / 3.78	3.79 / 3.57	3.38 / 3.61	3.22 / 3.21
	Annual energy consumption		kWh	1055	1319	1320	1850	1940
Seasonal (*)	Energy Label	Cooling / Heating		A/A	A/A	A/B	A/B	A/C
	SEER / SCOP	Cooling / Heating		3.71 / -	3.54 / -	3.56 / -	3.73 / -	3.58 / -
Dimensions	(Height x Width x Depth)		mm	204x840x840	246x840x840			
Weight			kg	21	23			
Air Flow Rate	Cooling	High/Low	m³/min	15.5 / 9.0	23.5 / 16.0		27.5 / 19.0	
	Heating	High/Low	m³/min	16.0 / 9.5	23.5 / 16.0		27.5 / 19.0	
Sound Power	Cooling	High	dBA	51	54		58	
Sound Pressure	Cooling	High/Low	dBA	33 / 28	37 / 32		41 / 35	
	Heating	High/Low	dBA	34 / 28	37 / 32		41 / 35	42 / 35
Refrigerant			Type	R-410A				
Power Supply	1~/220-240V/50,60Hz							
Decoration Panel	Model			BYCQ140CW1 ¹ / BYCQ140CW1W ² / BYCQ140CGW1 ³				
	Colour			Pure white (RAL 9010)				
	HxWxD		mm	50x950x950 / 50x950x950 / 130x950x950				
	Weight		kg	5.5 / 5.5 / 11.5				
Controller	Wired/Wireless			BRC1D52 (standard) / BRC7F532F (optional) BRC1E51A (optional)				

Outdoor Unit		RZQ71D3V1	RZQ100D9V1	RZQ100B9W1	RZQ125D9V1	RZQ125B9W1	RZQ140D9V1	RZQ140B9W1
Dimensions	(Height x Width x Depth)	mm	770x900x320	1345x900x320	1345x900x320	1345x900x320	1345x900x320	1345x900x320
Weight	kg	67	108	106	108	106	108	106
Operation Range	Cooling	Min-Max	°CDB	-15.0~50.0				
	Heating	Min-Max	°CWB	-20.0~15.5				
Sound Power	Cooling	dBA	64	65	67	66	68	66
Sound Pressure (Standard)	Cooling	dBA	48	50	51	50	51	50
	Heating	dBA	50	52	53	52	53	52
Sound Level (Night quiet)	Sound Pressure	dBA	43	45			46	45
Refrigerant	Type		R-410A					
Power Supply	1~/220-240V/50Hz		1~/220-240V/50Hz	3N~/400V/50Hz	1~/220-240V/50Hz	3N~/400V/50Hz	1~/220-240V/50Hz	3N~/400V/50Hz
Piping connections	Liquid (OD)/Gas/Drain	mm	9.52 / 15.9 / 26					
Piping Length (Maximum)	m	50	75					
Max. interunit level difference	m	0.5						
Max installation height difference	m	30						

(*) Seasonal efficiencies are calculated based on draft PrEn 14825: 2009 (under inquiry stage). Data are subject to change.

¹ Pure white standard panel with grey louvres; ² Pure white standard panel with white louvres; ³ Pure white auto cleaning panel

FCQ-C8 / REQ-B

Low Height Round Flow Cassette



BRC1D52



BRC1E51A



BRC7F532F



FCQ100,125C8



REQ100B

- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.
- Selfcleaning Panel (accessory)** – The round filter in the panel automatically cleans itself once per day. Simplicity of upkeep means optimum energy efficiency and maximum comfort without the need for expensive or time-consuming maintenance. Energy saving up to 30%.

- D3 Net connection as standard
- Modern style decoration panel in pure white with grey louvres. Also available in white with white louvres
- 360° air discharge ensures uniform air flow and temperature distribution
- Air discharge from the corners avoids dead zones that may be subject to temperature differences
- Comfortable horizontal air discharge ensures draught free operation and prevents ceiling soiling
- 23 different air flow patterns possible
- Fresh air intake: standard knockout and optional kit
- Reduced installation height: 214mm for class 71
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications

HEAT PUMP			NON-INVERTER								
Indoor Units			FCQ71C8		FCQ100C8		FCQ125C8				
Nominal Capacity	Cooling capacity Standard	kW	7.1	7.1	10.0	10.0	12.5				
	Heating capacity Standard	kW	8.0	8.0	11.2	11.2	14.6				
EER / COP	Cooling / Heating		2.61 / 2.81	2.67 / 2.86	2.61 / 2.99	2.81 / 3.06	2.68 / 2.89				
Annual energy consumption		kWh	1360	1330	1915	1780	2330				
Energy Label	cooling / heating		D / D		D / D	C / D	D / D				
Dimensions	(Height x Width x Depth)	mm	204x840x840		246x840x840		246x840x840				
Weight	kg		21		23		23				
Air Flow Rate	Cooling	High/Low	m³/min	15.5 / 9.0	23.5 / 16.0	27.5 / 19.0					
	Heating	High/Low	m³/min	16.0 / 9.5	23.5 / 16.0	27.5 / 19.0					
Sound Power	Cooling	High	dBA	51	54	58					
Sound Pressure	Cooling	High/Low	dBA	33 / 28	37 / 32	41 / 35					
	Heating	High/Low	dBA	34 / 28	37 / 32	41 / 35					
Refrigerant	Type		R-410A		R-410A		R-410A				
Power Supply	1~/220-240V/50/60Hz			1~/220-240V/50/60Hz		1~/220-240V/50/60Hz					
Decoration Panel	Model		BYCQ140CW1 ¹ / BYCQ140CW1W ² / BYCQ140CGW1 ³								
	Colour		Pure white (RAL 9010)								
	HxWxD	mm	50x950x950 / 50x950x950 / 130x950x950								
	Weight	kg	5.5 / 5.5 / 11.5								
Controller	Wired/Wireless		BRC1D52 (standard) BRC7F532F (optional) BRC1E51A (optional)								

Outdoor Unit		REQ71BV	REQ71BW	REQ100BV	REQ100BW	REQ125BW		
Dimensions	(Height x Width x Depth)	mm		770x900x320		1170x900x320		
Weight	kg	83		102	100	108		
Sound pressure level	Cooling	dBA	53	53	57	57		
Sound power level	Cooling	dBA	65	65	70	70		
Operation Range	Cooling	Min~Max	°CDB	10.0~46.0				
	Heating	Min~Max	°CWB	-10~15				
Refrigerant	Type		R-410A					
Power Supply	1~/230V/50Hz		3N~/400V/50Hz	1~/230V/50Hz	3N~/400V/50Hz			
Piping connections	Liquid (OD)/Gas/Drain	mm	9.52 / 15.9 / 26					
Piping Length (Maximum)		m	50					
Max Installation Height Difference		m	30					

¹ Pure white standard panel with grey louvres; ² Pure white standard panel with white louvres; ³ Pure white auto cleaning panel



Seasonal Inverter

INVERTER

FUQ-B / RZQ-D/B9W1

4-Way Blow Ceiling Suspended Cassette



BRC1D52



BRC1E51A



BRC7C528



FUQ100, 125B



RZQ100, 125D

- Seasonal Inverter Technology:** first Sky Air range in the market optimized for seasonal efficiency.
- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- Can be installed in both new and existing buildings.
- Air can be discharged in any of 4 directions
- Air flow distribution for ceiling heights up to 3.5m without loss of capacity.
- No ceiling staining
- Possibility to shut 1 or 2 flaps for easy installation in corners
- Air filter, drain pan and heat exchanger fin are mildew proof and anti-bacterial treated.
- Drain-up pump with 500mm lift fitted as standard
- Easy to install
- Communications, computer and server room cooling possible with EDP setting.
- Re-use of existing R22 and R407C piping possible. (See R22 Replacement leaflet)
- Suitable for Twin, Triple and Double Twin applications



HEAT PUMP				SEASONAL INVERTER					
Indoor Units				FUQ71B	FUQ100B	FUQ125B			
Capacity	Cooling capacity	Standard	kW	7.1	10		12.5		
	Heating capacity	Standard	kW	8.0	11.2		14.0		
Nominal	EER / COP	Cooling / Heating		3.21 / 3.42	3.37 / 3.38	3.21 / 3.41	3.16 / 3.29		
	Annual energy consumption	kWh		1,105	1484	1560	1978		
Seasonal (*)	Energy Label	Cooling / Heating		A / B	A / C	A / B	B / C		
	SEER / SCOP	Cooling / Heating		3.57 / -	3.21 / -	3.08 / -	3.50 / -		
Dimensions	(Height x Width x Depth)		mm	165x895x895	230x895x895				
Weight	kg			25.0	31.0				
Air Flow Rate	Cooling	High/Low	m³/min	19.0 / 14.0	29.0 / 21.0		32.0 / 23.0		
	Heating	High/Low	m³/min	19.0 / 14.0	29.0 / 21.0		32.0 / 23.0		
Sound Power	Cooling	High/Low	dBA	56.0 / 51.0	59.0 / 54.0		60.0 / 55.0		
	Heating	High/Low	dBA	56.0 / 51.0	59.0 / 54.0		60.0 / 55.0		
Sound Pressure	Cooling	High/Low	dBA	40.0 / 35.0	43.0 / 38.0		44.0 / 39.0		
	Heating	High/Low	dBA	40.0 / 35.0	43.0 / 38.0		44.0 / 39.0		
Refrigerant	Type			R-410A					
Power Supply	1~/220-240V/50Hz								
Controller	Wired/Wireless			BRC1D52 (standard)	BRC7C528 (optional)	BRC1E51A (optional)			

Outdoor Unit			RZQ71D3V1	RZQ100D9V1	RZQ100B9W1	RZQ125D9V1	RZQ125B9W1			
Dimensions	(Height x Width x Depth)		mm	770x900x320	1345x900x320		1345x900x320			
Weight	kg			67	108	106	108			
Operation Range	Cooling	Min~Max	°CDB	-15.0~50.0						
	Heating	Min~Max	°CWB	-20.0~15.5						
Sound Power	Cooling		dBA	64	65	67	66			
Sound Pressure (Standard)	Cooling	dBA		48	50	51	50			
	Heating	dBA		50	52	53	52			
Sound Level (Night quiet)	Sound Pressure	dBA		43	45					
Refrigerant	Type			R-410A						
Power Supply	1~/220-240V/50Hz			1~/220-240V/50Hz	3N~/400V/50Hz	1~/220-240V/50Hz	3N~/400V/50Hz			
Piping connections	Liquid (OD)/Gas/Drain		mm	9.52 / 15.9 / 26						
Piping Length (Maximum)	m			50	75					
Max. interunit level difference	m			0.5						
Max installation height difference	m			30						

(*) Seasonal efficiencies are calculated based on draft PrEn 14825: 2009 (under inquiry stage). Data are subject to change.

FHQ-B / RKS-G/F

Ceiling Suspended Unit



- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- Ideal solution for shops, restaurants or offices without false ceilings
- Easy installation and maintenance
- Auto-swing function ensures efficient air and temperature distribution.
- Air flow distribution for ceiling heights up to 3.8m without loss of capacity.
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications

COOLING ONLY			INVERTER			
Indoor Units	Capacity	Cooling capacity	FHQ35B	FHQ50B	FHQ60B	
		Minimum kW	1.4	1.7	1.7	
		Standard kW	3.4	5.0	5.7	
EER	Nominal		3.7	5.6	6.0	
			3.24	2.73	2.65	
Annual energy consumption			525 kWh	915	1075	
Energy Label	cooling		A	D	D	
Dimensions	(Height x Width x Depth)		195x960x680 mm	195x960x680	195x1160x680	
Weight	kg		24.0	25.0	27.0	
Air Flow Rate	Cooling	High/Low m³/min	13.0 / 10.0	13.0 / 10.0	17.0 / 13.0	
Sound Power	Cooling	High/Low dBA	53.0 / 48.0	54.0 / 49.0	55.0 / 49.0	
	Heating	High/Low dBA	53.0 / 48.0	54.0 / 49.0	-	
Sound Pressure	Cooling	High/Low dBA	37.0 / 32.0	38.0 / 33.0	39.0 / 33.0	
Refrigerant	Type		R-410A	R-410A	R-410A	
Power Supply	1~/220-240V/50Hz			1~/220-240V/50Hz	1~/220-240V/50Hz	
Controller	Wired/Wireless			BRC1D52 (standard) BRC7E66 (optional) BRC1E51A (optional)		

Outdoor Unit			RKS35G	RKS50G	RKS60F
Dimensions	(Height x Width x Depth)	mm	550x765x285	735x825x300	735x825x300
Weight	kg		34	48	47
Operation Range	Cooling	Min~Max °CDB	-10~46	-10~46	-10~46
Sound Power	Cooling	dBA	62	61	63
Sound Pressure (Low)	Cooling	dBA	44	44	46
Sound Pressure (High)	Cooling	dBA	48	48	49
Refrigerant	Type		R-410A	R-410A	R-410A
Power Supply	1~/220-240V/50Hz			1~/220-240V/50Hz	1~/220-240V/50Hz
Piping connections	Liquid (OD)/Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 12.7
Piping Length (Maximum)		m	20	30	30
Max Installation Height Difference		m	15	20	20

FHQ-B / RXS-G/F

Ceiling Suspended Unit



BRC1D52



BRC1E51A



BRC7E63



FHQ35, 50B



RXS35G

- Wired remote controller provides** a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- Ideal solution for shops, restaurants or offices without false ceilings
- Easy installation and maintenance
- Auto-swing function ensures efficient air and temperature distribution.
- Air flow distribution for ceiling heights up to 3.8m without loss of capacity.
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications

HEAT PUMP			INVERTER		
Indoor Units			FHQ35B	FHQ50B	FHQ60B
Capacity	Cooling capacity	Minimum kW	1.4	1.7	1.7
		Standard kW	3.4	5.0	5.7
		Maximum kW	3.7	5.6	6.0
	Heating capacity	Minimum kW	1.2	1.7	1.7
		Standard kW	4.0	6.0	7.2
		Maximum kW	5.0	7.0	8.0
EER / COP	Cooling / Heating		3.24 / 3.60	2.73 / 2.93	2.65 / 2.89
Annual energy consumption	kWh		525	915	1075
Energy Label	cooling / heating		A / A	D / C	D / D
Dimensions	(Height x Width x Depth)		195x960x680	195x960x680	195x1160x680
Weight	kg		24.0	25.0	27.0
Air Flow Rate	Cooling	High/Low m³/min	13.0 / 10.0	13.0 / 10.0	17.0 / 13.0
	Heating	High/Low m³/min	13.0 / 10.0	13.0 / 10.0	16.0 / 13.0
Sound Power	Cooling	High/Low dBA	53.0 / 48.0	54.0 / 49.0	55.0 / 49.0
	Heating	High/Low dBA	53.0 / 48.0	54.0 / 49.0	-
Sound Pressure	Cooling	High/Low dBA	37.0 / 32.0	38.0 / 33.0	39.0 / 33.0
	Heating	High/Low dBA	37.0 / 32.0	38.0 / 33.0	39.0 / 33.0
Refrigerant	Type		R-410A	R-410A	R-410A
Power Supply	1~/220-240V/50Hz		1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz
Controller	Wired/Wireless		BRC1D52 (standard) BRC7E63 (optional) BRC1E51A (optional)		

Outdoor Unit			RXS35G	RXS50G	RXS60F
Dimensions	(Height x Width x Depth)		550x765x285	735x825x300	735x825x300
Weight	kg		34	48	48
Operation Range	Cooling	Min~Max °CDB	-10~46	-10~46	-10~46
	Heating	Min~Max °CWB	-15~20	-15~20	-15~18
Sound Power	Cooling	dBA	63	61	63
Sound Pressure (Low)	Cooling	dBA	44	44	46
	Heating	dBA	45	45	46
Sound Pressure (High)	Cooling	dBA	48	48	49
	Heating	dBA	48	48	49
Refrigerant	Type		R-410A	R-410A	R-410A
Power Supply	1~/220-240V/50Hz		1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz
Piping connections	Liquid (OD)/Gas		6.35/9.52	6.35/12.7	6.35/12.7
Piping Length (Maximum)	m		20	30	30
Max Installation Height Difference	m		15	20	20



Comfort Inverter

INVERTER

FHQ-B / RZQS-D

Ceiling Suspended Unit



BRC1D52



BRC1E51A



BRC7E63



FHQ71B



RZQS100,125D

- Wired remote controller provides** a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- Ideal solution for shops, restaurants or offices without false ceilings
- Easy installation and maintenance
- Auto-swing function ensures efficient air and temperature distribution.
- Air flow distribution for ceiling heights up to 3.8m without loss of capacity.
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications

HEAT PUMP				COMFORT INVERTER		
Indoor Units				FHQ71B	FHQ100B	FHQ125B
Capacity	Cooling capacity	Standard	kW	7.1	10.0	12.5
	Heating capacity	Standard	kW	8.0	11.2	14.0
EER / COP	Cooling / Heating			2.83 / 2.91	2.81 / 2.91	2.75 / 2.88
Annual energy consumption			kWh	1254	1779	2273
Energy Label	cooling / heating			C / D	D / D	
Dimensions	(Height x Width x Depth)		mm	195x1160x680	195x1400x680	195x1590x680
Weight			kg	27.0	32.0	35.0
Air Flow Rate	Cooling	High/Low	m³/min	17.0 / 14.0	24.0 / 20.0	30.0 / 25.0
	Heating	High/Low	m³/min	17.0 / 14.0	24.0 / 20.0	30.0 / 25.0
Sound Power	Cooling	High/Low	dBA	55.0 / 51.0	58.0 / 53.0	60.0 / 55.0
	Heating	High/Low	dBA	55.0 / 51.0	58.0 / 53.0	60.0 / 55.0
Sound Pressure	Cooling	High/Low	dBA	39.0 / 35.0	42.0 / 37.0	44.0 / 39.0
	Heating	High/Low	dBA	39.0 / 35.0	42.0 / 37.0	44.0 / 39.0
Refrigerant			Type	R-410A		
Power Supply				1~/220-240V/50Hz		
Controller	Wired/Wireless			BRC1D52 (standard) BRC7E63 (optional) BRC1E51A (optional)		

Outdoor Unit			RZQS71DV1	RZQS100DV1	RZQS125DV1
Dimensions	(Height x Width x Depth)	mm	770x900x320	1170x900x320	
Weight	kg		68	103	
Operation Range	Cooling	Min-Max	°CDB	-5~46	
	Heating	Min-Max	°CWB	-15~15.5	
Sound Power	Cooling	dBA	65	67	
Sound Pressure (Standard)	Cooling	dBA	49	51	
	Heating	dBA	51	55	53
Sound Level (Night quiet)	Sound Pressure	dBA	47	49	
Refrigerant			R-410A		
Power Supply				1~/220-240V/50Hz	
Piping connections	Liquid (OD)/Gas/Drain	mm	9.52 / 15.9 / 26		
Piping Length (Maximum)	m		30	50	
Max interunit level difference	m			0.5	
Max Installation Height Difference	m		15	30	



Seasonal Inverter

INVERTER

FHQ-B / RZQ-D/B9W1

Ceiling Suspended Unit



BRC1D52



BRC1E51A



BRC7E63



FHQ71B



RZQ100,125D

- Seasonal Inverter Technology:** first Sky Air range in the market optimized for seasonal efficiency.
- Wired remote controller** provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1D52 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- Ideal solution for shops, restaurants or offices without false ceilings
- Easy installation and maintenance
- Auto-swing function ensures efficient air and temperature distribution.
- Air flow distribution for ceiling heights up to 3.8m without loss of capacity.
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications
- Communications, computer and server room cooling possible with EDP setting.
- Re-use of existing R22 and R407C piping possible. (See R22 Replacement leaflet)



HEAT PUMP				SEASONAL INVERTER								
Indoor Units				FHQ71B	FHQ100B		FHQ125B					
Nominal Capacity	Cooling capacity	Standard	kW	7.1	10.0		12.5					
	Heating capacity	Standard	kW	8.0	11.2		14.0					
Nominal	EER / COP	Cooling / Heating		3.03 / 3.10	3.18 / 3.27	3.17 / 3.11	2.95 / 3.27	2.81 / 3.11				
	Annual energy consumption		kWh	1172	1572	1575	2119	2225				
Seasonal (*)	Energy Label	Cooling / Heating		B / D	B / C	B / D	C / C	C / D				
	SEER / SCOP	Cooling / Heating		3.47 / -	3.06 / -	3.06 / -	3.31 / -	3.18 / -				
Dimensions	(Height x Width x Depth)		mm	195x1160x680	195x1400x680		195x1590x680					
Weight			kg	27.0	32.0		35.0					
Air Flow Rate	Cooling	High/Low	m³/min	17.0 / 14.0	24.0 / 20.0		30.0 / 25.0					
	Heating	High/Low	m³/min	17.0 / 14.0	24.0 / 20.0		30.0 / 25.0					
Sound Power	Cooling	High/Low	dBA	55.0 / 51.0	58.0 / 53.0		60.0 / 55.0					
Sound Pressure	Cooling	High/Low	dBA	39.0 / 35.0	42.0 / 37.0		44.0 / 39.0					
	Heating	High/Low	dBA	39.0 / 35.0	42.0 / 37.0		44.0 / 39.0					
Refrigerant			Type	R-410A								
Power Supply				1~/220-240V/50Hz								
Controller	Wired/Wireless			BRC1D52 (standard) / BRC7E63 (optional) BRC1E51A (optional)								

Outdoor Unit			RZQ71D3V1	RZQ100D9V1	RZQ100B9W1	RZQ125D9V1	RZQ125B9W1		
Dimensions	(Height x Width x Depth)	mm	770x900x320	1345x900x320		1345x900x320			
Weight		kg	67	108	106	108	106		
Sound pressure level	Cooling (Night quiet mode)	dBA	48 (43)	50 (45)	50 (45)	51 (45)	50 (45)		
	Heating	dBA	50	52	52	53	52		
Sound power level	Cooling	dBA	64	65		67	66		
Operation Range	Cooling	Min-Max	°CDB	-15.0~50.0					
	Heating	Min-Max	°CWB	-20.0~15.5					
Refrigerant			Type	R-410A					
Power Supply				1~/230V/50Hz	1~/230V/50Hz	3N~/400V/50Hz	1~/230V/50Hz		
Piping connections	Liquid (OD)/Gas/Drain	mm	9.52 / 15.9 / 26						
Piping Length (Maximum)		m	50	75					
Max. interunit level difference		m	0.5						
Max Installation Height Difference		m	30						

(*) Seasonal efficiencies are calculated based on draft PrEn 14825: 2009 (under inquiry stage). Data are subject to change.

FHQ-B / REQ-B

Ceiling Suspended Unit



BRC1DS2



BRC1E51A



BRC7E63



FHQ71B



REQ71B

- Wired remote controller provides** a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible (BRC1DS2 standard / BRC1E51A optional).
- BRC1E51A – New optional wired controller** allows easy navigation through menu items, via a personalised display and minimal number of buttons.
- Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- User Access:** different levels of user access can be selected.

- Ideal solution for shops, restaurants or offices without false ceilings
- Easy installation and maintenance
- Auto-swing function ensures efficient air and temperature distribution.
- Air flow distribution for ceiling heights up to 3.8m without loss of capacity.
- Connection to multi outdoor possible
- Suitable for Twin, Triple and Double Twin applications

HEAT PUMP				NON-INVERTER		
				FHQ71B	FHQ100B	FHQ125B
Indoor Units						
Capacity	Cooling capacity	Standard kW		7.1	9.8	12.2
	Heating capacity	Standard kW		8	11.2	14.5
Annual energy consumption	kWh			1350	1325	1875
EER / COP	Cooling / Heating			2.63 / 2.81	2.68 / 2.86	2.61 / 2.71
Energy Label	cooling / heating			D / D	D / E	D / D
Dimensions	(Height x Width x Depth)	mm		195x160x680	195x1400x680	195x1590x680
Weight	kg			27.0	32.0	35.0
Air Flow Rate	Cooling	High/Low m³/min		17.0 / 14.0	24.0 / 20.0	30.0 / 25.0
	Heating	High/Low m³/min		17.0 / 14.0	24.0 / 20.0	30.0 / 25.0
Sound Power	Cooling	High/Low dBA		55.0 / 51.0	58.0 / 53.0	60.0 / 55.0
Sound Pressure	Cooling	High/Low dBA		39.0 / 35.0	42.0 / 37.0	44.0 / 39.0
	Heating	High/Low dBA		39.0 / 35.0	42.0 / 37.0	44.0 / 39.0
Refrigerant	Type			R-410A		
Power Supply				1~/220-240V/50Hz		
Controller	Wired/Wireless			BRC1DS2 (standard) / BRC7E63 (optional) BRC1E51A (optional)		

Outdoor Unit		REQ71BV	REQ71BW	REQ100BV	REQ100BW	REQ125BW
Dimensions	(Height x Width x Depth)	mm	770x900x320		1170x900x320	
Weight	kg		83	102	100	108
Operation Range	Cooling	Min~Max °CDB		10.0~46.0		
	Heating	Min~Max °CWB		-10~15		
Sound Level (nominal)	Sound Power	Cooling dBA	65.0		70.0	
	Sound Pressure	Cooling dBA	53.0		57.0	
Refrigerant	Type		R-410A			
Power Supply		1~/230V/50Hz	3N~/400V/50Hz	1~/230V/50Hz	3N~/400V/50Hz	
Piping connections	Liquid (OD)/Gas/Drain mm			9.52 / 15.9 / 26		
Piping Length (Maximum)	m			50		
Max Installation Height Difference	m			30		



UATYQ-B Rooftop R-410A



UATYP-A Rooftop R-407C

UATYQ-B

- High efficiency
- Refrigerant is factory pre-charged to ensure clean and efficient operation
- 'Plug and Play' installation: single unit configuration
- Extended operating range: Cooling: 0°C to 52°C as standard (no field setting or low ambient kit required)

- Heating:** -15°C to 20°C as standard
- All range with convertible return and supply air: fan can be mounted in two directions
 - Belt driven fan enables air volume and static pressure to be adjusted as required
 - New unified wired LCD control panel with extended control length up to 100m
 - 7 days programmable timer

- Integration to bigger Daikin control system via option
- Smoke detector contact
- Electric heater connection
- The flat top design allows for maximum utilisation of warehouse/container space
- Coil with anti-corrosion treatment.

HEAT PUMP				NON-INVERTER			
Outdoor Units				UATYQ250BY1	UATYQ350BY1	UATYQ450BY1	UATYQ550BY1*
Capacity	Cooling	Nominal	kW	27.34	35.58	44.72	55.69
	Heating	Nominal	kW	24.91	34.79	41.79	53.93
Power input	Cooling	Nominal	kW	8.14	10.78	13.04	16.72
	Heating	Nominal	kW	7.33	10.84	12.86	15.54
EER	Cooling			3.36	3.30	3.43	3.33
COP	Heating			3.40	3.21	3.25	3.47
Air flow rate evaporator	Cooling	l/s		1,560	2,030	2,670	3,170
Sound power level	Standard ESP	dBA		73	76	80	84
External static pressure		Pa			147		206
Condensation drain size	Diameter	OD	mm		25.4		25.4
Casing	Colour			Light grey		-	-
	Material			Electro galvanised mild steel			
Dimensions	(Height x Width x Depth)		mm	1,150 x 1,638 x 2,063	1,028 x 2,209 x 2,113	1,130 x 2,209 x 2,113	1,048 x 2,209 x 2,670
Weight	kg			490	660	690	780
Air flow rate condenser	Cooling	l/s		3,884	5,664	5,710	6,090
Operation Range	Cooling	Min~Max	°CDB		0~52		0~52
	Heating	Min~Max	°CWB		-15~20		-15~20
Condenser	Sound power level	Nominal	dBA	82		83	
Refrigerant	Type			R-410A		R-410A	
Power Supply				3~/380-415V/50Hz		3~/380-415V/50Hz	

* Note: grey cells contain preliminary data

UATYP-A

- 'Plug and Play' installation: single unit configuration
- Refrigerant is factory pre-charged to ensure clean and efficient operation.

- Air volume/static pressure can be adjusted because of the use of a belt driven fan.
- The flat top design allows for maximum utilisation of warehouse/ container space.

- High efficiency and reliable scroll compressor.
- Coil with anti-corrosion treatment.
- Connection to multi outdoor possible

HEAT PUMP				NON-INVERTER			
Outdoor Units				UATYP700AY1	UATYP850AY1	UATYPC10AY1	UATYPC12AY1
Capacity	Cooling	Nominal	kW	67.406	82.939	101.110	109.609
	Heating	Nominal	kW	74.733	92.317	102.290	126.314
Power input	Cooling	Nominal	kW	29.20	38.16	43.17	48.20
	Heating	Nominal	kW	26.22	34.78	41.67	46.80
EER	Cooling			2.31	2.17	2.34	2.27
COP	Heating			2.85	2.65	2.45	2.70
Air flow rate evaporator	Cooling	m³/min		226	263	312	354
External static pressure		Pa			294		
Condensation drain size	Diameter	OD	mm		25.4		
Casing	Colour			Light grey			
	Material			Electro galvanised mild steel			
Dimensions	(Height x Width x Depth)		mm	1,735 x 2,250 x 2,800		1,974 x 2,252 x 3,180	
Weight	kg			1,200	1,350	1,510	1,600
Air flow rate condenser	Cooling	m³/min			566		
Operation Range	Cooling	Min~Max	°CDB		20°C ~ 46°C		
	Heating	Min~Max	°CWB		-15°C ~ 20°C		
Sound level	Sound power	dBA		74		80	
Refrigerant	Type			R-407C			
Power Supply				3~/380-415V/50Hz			



CITYM-DK-F



AIR CURTAINS FOR SKY AIR


Biddle CITY air curtains are the ideal solution for retailers and consultants to combat the issue of climate separation across their outlet or office doorway. Using a combination of rectifier technology, optimised air velocity and temperature control they deliver greater comfort to staff and customers alike, all year round, in all weathers.

In conjunction with Biddle, Daikin now offer the Sky Air, air curtain to the market, coupling the benefits of the Biddle City air curtain technology with the benefits of the Daikin Sky Air Seasonal and Comfort Inverters.

Biddle CITYM air curtain for
Daikin's Sky Air, with Daikin's
Commercial Multi System
= Highly energy efficient solution

A total heating and cooling
solution from the CMS and
maintained store entrance
temperature from the air curtain
with Sky Air.




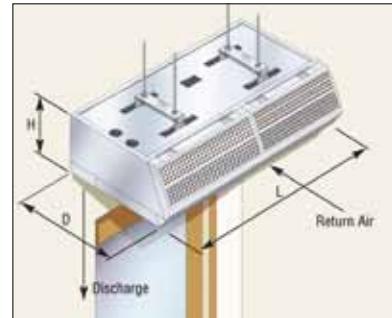

Exposed Model (F)

CITYM-DK-F (Exposed Model)

Air curtain		CITYM150DK-F	CITYM200DK-F
Capacity	Heating (speed 1/2) kW	7.41 / 11.20	9.03 / 14.00
Dimensions	(Height x Width x Depth) mm	297 x 1500 x 590	297 x 2000 x 590
Weight	kg	65	84
Air Flow Rate	(speed 1/2) m³/h	1836 / 2408	2444 / 3211
Sound Pressure (at 3m)	(speed 1/2) dBA	46 / 51	47 / 53
Refrigerant	Type	R-410A	R-410A
Power Supply		1~/230V/50Hz	1~/230V/50Hz
Max door width	m	1.5	2.0
Max mounting height	m	3.2	3.2

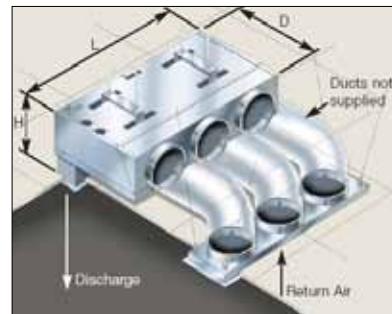

Ceiling Recessed Model (R)

CITYM-DK-R (Ceiling Recessed Model)

Air curtain		CITYM150DK-R	CITYM200DK-R
Capacity	Heating (speed 1/2) kW	7.41 / 11.20	9.03 / 14.00
Dimensions	(Height x Width x Depth) mm	*297 x 1500	*297 x 2000 x 565
Weight	kg	85	113
Air Flow Rate	(speed 1/2) m³/h	1836 / 2408	2444 / 3211
Sound Pressure (at 3m)	(speed 1/2) dBA	46 / 51	47 / 53
Refrigerant	Type	R-410A	R-410A
Power Supply		1~/230V/50Hz	1~/230V/50Hz
Max door width	m	1.5	2.0
Max mounting height	m	3.2	3.2

*Plus Telescopic Discharge Section adding 80-125mm



Cassette Model (C)

CITYM-DK-C (Cassette Model)

Air curtain		CITYM150DK-C	CITYM200DK-C
Capacity	Heating (speed 1/2) kW	7.41 / 11.20	9.03 / 14.00
Dimensions	(Height x Width x Depth) mm	297 x 1500 x 821	297 x 2000 x 821
Weight	kg	82	107
Air Flow Rate	(speed 1/2) m³/h	1836 / 2408	2444 / 3211
Sound Pressure (at 3m)	(speed 1/2) dBA	46 / 51	47 / 53
Refrigerant	Type	R-410A	R-410A
Power Supply		1~/230V/50Hz	1~/230V/50Hz
Max door width	m	1.5	2.0
Max mounting height	m	3.2	3.2

DAIKIN – BIDDLE TECHNOLOGY

The CITYM air curtain automatically operates as a heating or ambient air curtain to maintain year round store entrance temperature and minimise heat loss and heat gains through the doorway.

- The CITYM air curtain offers energy consumption savings of up to 67% compared to a typical electrically heated air curtain, providing payback times of around 2 1/2 years.
- Biddle CITYM air curtains connect to selected Daikin Seasonal Inverter and Comfort Inverter models.
- Comfort Inverter combinations also allow a reduction in investment costs reducing the payback time even more.
- Inverter compressor control ensures automatic and efficient operation of heating output as required, maintaining temperature.
- Air curtain Rectifier technology offers a deeply penetrating airstream. The Rectifier technology has a European Patent.
- 90% air curtain separation efficiency at optimum height, reducing heat loss.
- Constant fan operation, even after heating set point temperature is achieved.



Daikin's Seasonal and Comfort Inverters

Inverter control enables Daikin to bring air conditioning technology of the future to the market today. Daikin inverter control cuts start up time and reduces energy consumption by up to 70%.



RZQ100E

COMBINATION TABLE	SEASONAL INVERTER				COMFORT INVERTER	
	RZQ100E		RZQ140E		RZQS100D	RZQS140D
	1ph	3ph	1ph	3ph	1ph	1ph
CITY-M-150-DK-*	•	•			•	
UK.CITY-M-200-DK-*			•	•		•


*F=Exposed / C=Cassette / R=Recessed

Biddle's rectifier technology (European Patent)




By reducing the air turbulence at the discharge of the air curtain, the induction of the surrounding air is also reduced, providing a deeply penetrating airstream. In addition the design of the rectifier provides a laminar air flow right down to floor level, reducing energy consumption and increasing comfort levels all year round.

- Laminar air flow stream – Minimizes air turbulence
- Reduced energy loss
- Improved penetration – greater comfort levels.

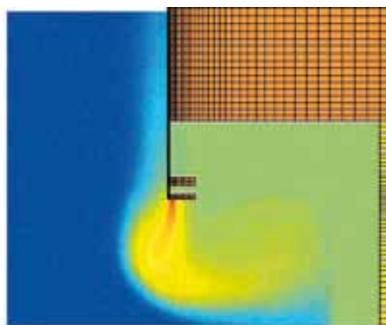

Standard air curtain, with turbulent air stream and loss of airflow – low separation efficiency

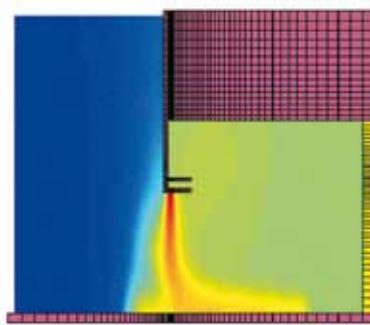


Daikin-Biddle air curtain with patented rectifier grille – separation efficiency up to 90%



Biddle's optimised air flow velocity

The correct air flow velocity greatly improves the air curtain efficiency and when combined with the rectifier technology, results in high separation efficiencies.

1. Energy losses – no air curtain fitted
2. Low velocity air curtain – additional heat lost with the out-flowing convective currents
3. High velocity air curtain – considerable turbulence, energy lost to the outside
4. Efficient air curtain

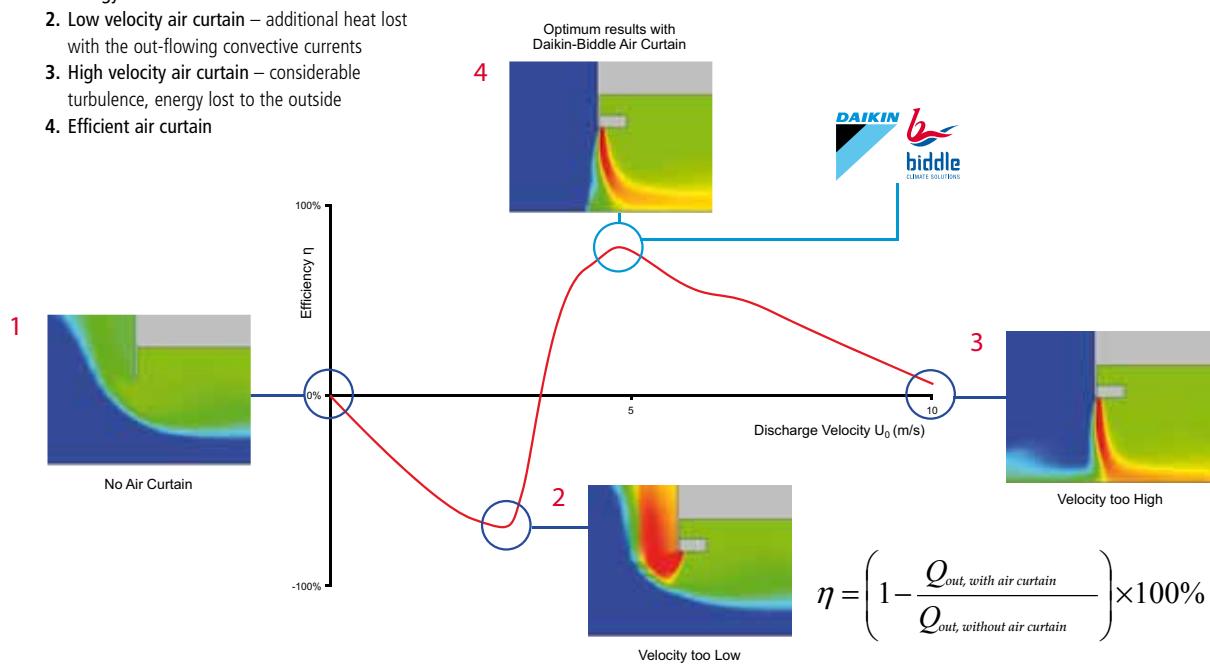

COMMERCIAL MULTI SYSTEM


Daikin has extended its Sky Air inverter range with the CMSQ series. This inverter controlled heat pump system is especially designed for light commercial applications with multiple areas requiring great flexibility and control. The CMSQ is ideal for shops, restaurants, small offices and even 2-storey areas.

- **Two classes available:** 20kW and 25kW
- **Energy efficient:** EER up to 3.71 and COP up to 4.1 - up to energy class A.
- **Inverter control:** ensures constant room temperatures and maximum efficiency, especially in partial load situations.
- **Indoor units:** Roundflow cassette and concealed ceiling unit, both in a range of capacities from 5.0 to 12.5 kW
- **Individual control:** ideal for applications which require flexible control, but do not have a need for simultaneous heating and cooling. Up to 4 indoor units can be connected and controlled individually.
- **Asymmetric combination:** different capacities and combinations of indoor units is possible
- **Flexible installation:** the outdoor unit is very flexible thanks to the increased piping length of 165m and the possibility to install the unit on the roof, against an outside wall or even indoors.
- Level difference between outdoor and indoor unit up to 30m
- Height difference between the indoor units is up to 4m, which means two-storey applications are possible.
- REFNET piping system for optimum refrigerant flow
- **Low noise levels:** with sound levels as low as 57 dBA (normal operation) and 45 dBA (night mode).
- **Control Systems:** Connectable to the Intelligent Touch Controller and Intelligent Manager control systems.






ASYMMETRIC COMBINATION:
different size and types of indoor units are possible

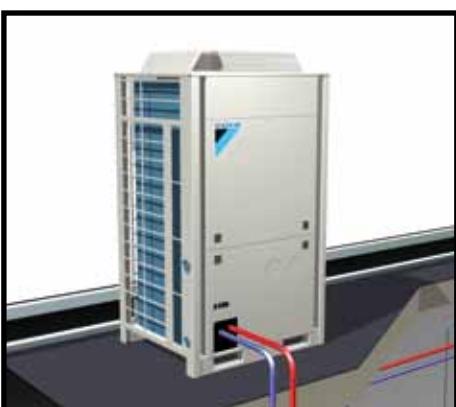


OUTDOOR UNIT: can be mounted easily on a roof, placed against an outside wall or even located indoors



REMOTE CONTROLLERS:
all indoor units can be controlled individually via wired or infrared remote control

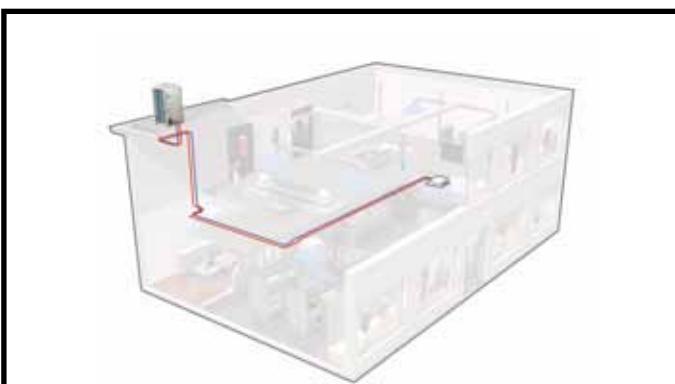

PIPING LENGTH INDOOR – OUTDOOR
Maximum piping length outdoor-all indoors: up to 165m. Maximum installation height difference outdoor-indoor: up to 30m

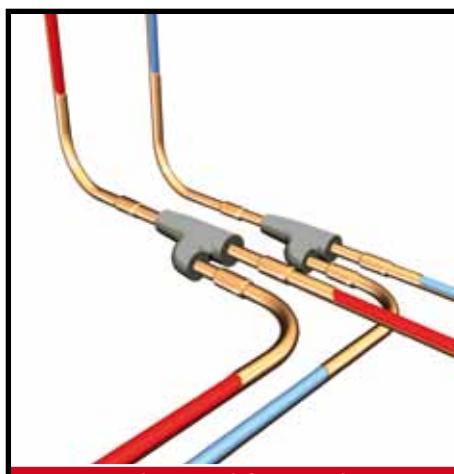

REFNET: designed for simple installation

INDOOR – OUTDOOR COMBINATIONS

OUTDOOR TYPE	NUMBER OF CONNECTABLE INDOORS	INDOOR TYPE	CAPACITY INDEX 1	CAPACITY INDEX 2	CAPACITY INDEX 3	CAPACITY INDEX 4	TOTAL CAPACITY INDEX	REFNET
CMSQ200A	2	FMCQ/FMDQ	50	50			100	KHRQ22M20TA
			50	60			110	KHRQ22M20TA
			50	71			121	KHRQ22M20TA
			50	100			150	KHRQ22M20TA
			50	125			175	KHRQ22M20TA
			60	60			120	KHRQ22M20TA
			60	71			131	KHRQ22M20TA
			60	100			160	KHRQ22M20TA
			60	125			185	KHRQ22M20TA
			71	71			142	KHRQ22M20TA
			71	100			171	KHRQ22M20TA
			71	125			196	KHRQ22M20TA
			100	100			200	KHRQ22M20TA
			50	50	50		150	2 x KHRQ22M20TA
CMSQ200A	3	FMCQ/FMDQ	50	50	60		160	2 x KHRQ22M20TA
			50	50	71		171	2 x KHRQ22M20TA
			50	50	100		200	2 x KHRQ22M20TA
			50	60	60		170	2 x KHRQ22M20TA
			50	60	71		181	2 x KHRQ22M20TA
			50	71	71		192	2 x KHRQ22M20TA
			60	60	60		180	2 x KHRQ22M20TA
			60	60	71		191	2 x KHRQ22M20TA
CMSQ200A	4	FMCQ/FMDQ	50	50	50	50	200	3 x KHRQ22M20TA
CMSQ250A	2	FMCQ/FMDQ	50	100			150	KHRQ22M29T9
			50	125			175	KHRQ22M29T9
			60	71			131	KHRQ22M29T9
			60	100			160	KHRQ22M29T9
			60	125			185	KHRQ22M29T9
			71	71			142	KHRQ22M29T9
			71	100			171	KHRQ22M29T9
			71	125			196	KHRQ22M29T9
			100	100			200	KHRQ22M29T9
			100	125			225	KHRQ22M29T9
			125	125			250	KHRQ22M29T9
			50	50	50		150	KHRQ22M29T9 + KHRQ22M20TA
			50	50	60		160	KHRQ22M29T9 + KHRQ22M20TA
			50	50	71		171	KHRQ22M29T9 + KHRQ22M20TA
			50	50	100		200	KHRQ22M29T9 + KHRQ22M20TA
CMSQ250A	3	FMCQ/FMDQ	50	50	125		225	KHRQ22M29T9 + KHRQ22M20TA
			50	60	60		170	KHRQ22M29T9 + KHRQ22M20TA
			50	60	71		181	KHRQ22M29T9 + KHRQ22M20TA
			50	60	100		210	KHRQ22M29T9 + KHRQ22M20TA
			50	60	125		235	KHRQ22M29T9 + KHRQ22M20TA
			50	71	71		192	KHRQ22M29T9 + KHRQ22M20TA
			50	71	100		221	KHRQ22M29T9 + KHRQ22M20TA
			50	71	125		246	KHRQ22M29T9 + KHRQ22M20TA
			60	60	60		180	KHRQ22M29T9 + KHRQ22M20TA
			60	60	71		191	KHRQ22M29T9 + KHRQ22M20TA
			60	60	100		220	KHRQ22M29T9 + KHRQ22M20TA
			60	60	125		245	KHRQ22M29T9 + KHRQ22M20TA
			71	71	71		213	KHRQ22M29T9 + KHRQ22M20TA
			71	71	100		242	KHRQ22M29T9 + KHRQ22M20TA
			50	50	50	50	200	KHRQ22M29T9 + 2 x KHRQ22M20TA
CMSQ250A	4	FMCQ/FMDQ	50	50	50	60	210	KHRQ22M29T9 + 2 x KHRQ22M20TA
			50	50	50	71	221	KHRQ22M29T9 + 2 x KHRQ22M20TA
			50	50	50	100	250	KHRQ22M29T9 + 2 x KHRQ22M20TA (1) 2 x KHRQ22M29T9 + KHRQ22M20TA (2)
			50	50	60	60	220	KHRQ22M29T9 + 2 x KHRQ22M20TA
			50	50	60	71	231	KHRQ22M29T9 + 2 x KHRQ22M20TA
			50	60	60	60	230	KHRQ22M29T9 + 2 x KHRQ22M20TA
			50	60	60	71	241	KHRQ22M29T9 + 2 x KHRQ22M20TA
			60	60	60	60	240	KHRQ22M29T9 + 2 x KHRQ22M20TA
			60	60	60	71	251	KHRQ22M29T9 + 2 x KHRQ22M20TA

Notes: (1) when indoor 100 is the first - (2) when indoor 50 is the first

Remark: in case 2 different refnets are being used, KHRQ22M29T9 needs to be installed first in line



CMSQ-A

Especially developed for light commercial multi applications such as shops, restaurants and small offices.

- › **Two classes available:** 20kW and 25kW
- › **Energy efficient:** EER up to 3.71 and COP up to 4.1
- › **Two types of connectable indoor units:** unique Roundflow cassette (FMCQ) and concealed ceiling unit (FMDQ), both in a range of capacities from 5.0 to 12.5 kW
- › **Individual control:** up to 4 indoors can be connected and controlled individually
- › **Asymmetric combination:** different capacities between indoor units is allowed
- › **Flexible installation:** can be mounted on a roof, placed against an outside wall, or installed indoors
- › Total system piping length of 200m
- › Level difference between outdoor and indoor unit up to 30m
- › Height difference between the indoor units up to 4m (two-storey shop application possible)
- › REFRNET piping system for optimum refrigerant flow
- › Extremely quiet in operation, with sound levels as low as 57 dBA (normal operation) and 45 dBA (night mode).
- › Connectable to the Intelligent Touch Controller and Intelligent Manager control systems

CMSQ-A

HEAT PUMP			CMSQ200A7W1B	CMSQ250A7W1B
Nominal capacity	cooling	kW	20.0	25.0
	heating	kW	22.4	28.0
Nominal input	cooling	kW	6.60	6.74
	heating	kW	5.80	6.83
EER			3.03	3.71
COP			3.86	4.10
Power supply	P+VHz		3N~, 400V, 50Hz	
Dimensions	HxWxD	mm	1,680x635x765	1,680x930x765
Weight		kg	159	187
Colour	Daikin White			
External static pressure		Pa	78 Pa in high static pressure	
Sound pressure level	cooling	dB(A)	57	59
Sound pressure, night quiet mode (level 1-2-3)	cooling	dB(A)	55-50-45	
Sound power level (nom)	cooling	dB(A)	78	81
Compressor		type	Hermetically sealed scroll compressor	
Refrigerant type			R-410A	
Refrigerant charge		kg	6.2	7.7
Refrigerant oil			Synthetic (ether) oil	
Refrigerant oil charged volume		l	1.7	2.1
Total system piping length (outdoor to all indoor units)		m	200	
Maximum piping length (outdoor - indoor units)		m	165	
Maximum installation height difference (outdoor-indoor units)		m	30	
Maximum interunit level difference (indoor-indoor)		m	4	
Maximum connectable indoor units			4	
Piping connections	liquid (O.D.)	mm	9.52	
	gas (O.D.)	mm	15.9	19.1
Operation range	cooling	from ~ to	°CDB	- 5.0 ~ 43.0
	heating	from ~ to	°CWB	- 20.0 ~ 15.0

OPTIONAL ACCESSORIES

NAME OF OPTION	CMSQ200A7W1B	CMSQ250A7W1B
Refnet header	KHRQ22M29H	
Refnet joint	KHRQ22M20T	
Central drain pan kit	KWC26B160	KWC26B280

FMCQ-A8

Roundflow Cassette



Roundflow Cassette FMCQ-A



White with white louvers

White with grey louvers

- › The thin body of the unit is the solution for customers requiring a compact unit for use with false ceilings: the required installation height is only 214mm for class 50-60
- › **Modern style decoration panel, available in 2 different variations:**
 - › white with grey louvers
 - › full white including white louvers especially designed for modern commercial interiors
- › **Horizontal air discharge:** ensures draught free operation and prevents ceiling soiling.
- › **Air flow flexibility:** a wide selection of 23 different airflow patterns enables unit installation in corners or small rooms.
- › Air discharge from the corners avoids dead zones that may be subject to temperature differences
- › **Fresh air intake:** up to 20%
- › Standard high-lift drain pump kit (850mm)
- › **Air purification filter:** removes airborne dust particles to ensure a steady supply of clean air
- › **Low noise operation:** down to 29 dBA sound pressure level
- › **Wired remote controller with weekly timer:** provides a 7-day schedule timer, enabling daily or weekly programming.
Up to 5 actions per day possible
- › **Fan speed:** 2 fan speeds can be selected
- › **Selfcleaning Panel (accessory) –** The round filter in the panel automatically cleans itself once per day. Simplicity of upkeep means optimum energy efficiency and maximum comfort without the need for expensive or time-consuming maintenance. Energy saving up to 30%.

FMCQ-A

			FMCQ50A8	FMCQ60A8	FMCQ71A8	FMCQ100A8	FMCQ125A8									
Nominal capacity	cooling	kW	5.0	6.0	7.1	10.0	12.5									
	heating	kW	5.6	6.7	8.0	11.2	14.0									
Dimensions (HxWxD)	unit	mm	204x840x840		246x840x840		288x840x840									
Weight	unit	kg	21		24		26									
Casing	Galvanised steel plate															
Air flow rate (H/L)	cooling	m³/min	15.5/10.0	16.5/11.0	23.5/14.5	26.5/17.0	33.0/20.0									
	heating	m³/min	15.0/9.5	17.5/12.0	23.5/14.5	28.0/17.5	33.0/20.0									
Sound pressure level (H/L)	cooling	dB(A)	33/28	34/29	38/32	41/33	44/34									
	heating	dB(A)	33/28	36/30	38/32	42/34	44/34									
Sound power level	cooling	dB(A)	51	52	55	58	61									
Power supply	P+VHz		1~220-240/220,50/60													
Refrigerant type	R-410A															
Piping connections	liquid (O.D.)	mm	6.35	9.52												
	gas (O.D.)	mm	12.7	15.9												
	drain	mm	VP25 (O.D. 32, I.D. 25)													
Infrared remote control	BRC7F532F															
Wired remote control	BRC1D528															
Decoration panel	model	BYCQ140CW1 ¹ / BYCQ140CW1W ² / BYCQ140CGW1 ³														
	colour	Pure white (RAL 9010)														
	dimensions (HxWxD)	mm	50x950x950 / 50x950x950 / 130x950x950													
	weight	kg	5.5 / 5.5 / 11.5													

OPTIONS

		FMCQ50A8	FMCQ60A8	FMCQ71A8	FMCQ100A8	FMCQ125A8
Decoration panel		BYCQ140CW1W / BYCQ140CGW1				
Long life replacement filter	non woven type	KAFP551K160				
Fresh air intake kit (20% fresh air intake)	chamber type	KDDQ55C140				
Sealing member of air discharge outlet		KDBHQ55C140				

¹Pure white standard panel with grey louvers; ²Pure white standard panel with white louvers; ³Pure white auto cleaning panel



FMDQ-B

The ducted unit with DC inverter driven fan offers lower energy input and higher performance and comfort.

Concealed ceiling unit Inverter fan

FMDQ-B



- › Ideal for areas requiring maximum floor space for furniture, decorations and fittings. Only air suction and discharge grilles are visible
- › **DC inverter fans:** large reduction in power consumption
- › **3-step airflow control:** Comfort improved
- › Maximum External Static Pressure (ESP) up to 120Pa. Flexible ducts of varying lengths can be easily used
- › Possibility to change ESP through wired remote control allows optimisation of the supply air volume
- › Automatic air flow adjustment towards nominal air flow rate to ease installation
- › **Standard high-lift drain pump kit (625mm):** increases reliability of the drain system
- › **Standard air filter:** removes airborne dust particles to ensure a steady supply of clean air
- › **Low noise:** down to 29 dBA sound pressure level
- › Wired remote controller with weekly timer: provides a 7-day schedule timer, enabling daily or weekly programming. Up to 5 actions per day possible
- › **Fan speed:** 3 fan speeds can be selected

FMDQ-B

		FMDQ50B	FMDQ60B	FMDQ71B	FMDQ100B	FMDQ125B			
Nominal capacity	cooling	kW	5.0	6.0	7.1	10.0			
	heating	kW	5.6	6.7	8.0	11.2			
Nominal input	cooling	kW	0.192	0.142	0.163	0.247			
	heating	kW	0.192	0.142	0.163	0.303			
Dimensions (HxWxD)	unit	mm	300x700x700	300x1,000x700	300x1,400x700				
Weight	unit	kg	26	35	46				
Casing			Galvanised steel / non painted						
Air flow rate (H/L)	cooling	m³/min	16/11	19.5/16	25/20	32/23			
	heating	m³/min	16/11	19.5/16	25/20	32/23			
ESP (H/M)	max	Pa	100/30		100/40	120/40			
Sound pressure level (H/L)	cooling	dB(A)	37/29	37/30	38/32	32			
	heating	dB(A)	37/29	37/30	38/32	32			
Sound power level	cooling	dB(A)	63	59	63	66			
Refrigerant type			R-410A						
Piping connections	liquid (O.D.)	mm	6.4	9.5					
	gas (O.D.)	mm	12.7	15.9					
	drain	mm	VP25 (O.D.32/I.D25)						
Air filter			Resin net with mold resistance						
Drain-up height		mm	625						
Power supply		PhVHz	1~, 220-240/220, 50/60						
Infrared remote control			BRC4C65						
Wired remote control			BRC1D528						
Decoration panel	model		BYBS45DJW1	BYBS71DJW1	BYBS125DJW1				
	dimensions (HxWxD)	mm	55x800x500	55x1,100x500	55x1,500x500				
	weight	kg	3.5	4.5	6.5				

OPTIONS

	FMDQ50B	FMDQ60B	FMDQ71B	FMDQ100B	FMDQ125B		
Decoration panel	BYBS45DJW1	BYBS71DJW1		BYBS125DJW1			
Service access panel	KTBJ25K56W	KTBJ25K80W	KTBJ25K160W				
High efficiency filter 65% (1)	KAFJ25L56	KAFJ25L80	KAFJ25L160				
High efficiency filter 90%	KAFJ25L56	KAFJ25L80	KAFJ25L160				
Filter chamber for bottom suction	KAJ25L56D	KAJ25L80D	KAJ25L160D				
Filter chamber for rear suction	KAJ25L56B	KAJ25L80B	KAJ25L160B				
Air suction canvas	KSA-25K56	KSA-25KA80	KSA-25K160				
Screening door / blind board	KBBJ25K56	KBBJ25K80	KBBJ25K160				
Air discharge adapter for round duct	KDAJ25KA56	KDAJ25KA140					

(1) If installing a high efficiency filter in the unit, an assembly chamber for either bottom or rear suction is required



Twin / Triple / Double Twin Applications & Multi Model Applications

1. Twin, Triple, Double Twin application	
Introduction	83
RZQS – Comfort Inverter Heat Pump	84
RZQ – Seasonal and Super Inverter Heat Pump	86
2. Multi model application	
Introduction	89
MXU-G – Inverter Ururu Multi	90
MXS-E/F/G – Inverter Heat Pump	94
RMXS-E – Super Multi Plus Inverter Heat Pump	120





Twin, Triple, Double Twin Application

It is possible to connect 2, 3 or 4 indoor units to a single outdoor unit. The indoor units may be of different types (e.g. 4-way blow ceiling mounted cassette, wall mounted, ...). All indoor units are operated together within the same mode (cooling or heating) from one remote control. This allows equal air distribution, even in larger, irregularly shaped rooms.

The total capacities (outdoor base) for simultaneous operation are the same as for the pair applications.

COMFORT INVERTER							
	4 WAY CASSETTE 600x600 FFQ-B	ROUND FLOW CASSETTE FCQ-C8	CEILING SUSPENDED 4 WAY CASSETTE FCQH-D8	CONCEALED CEILING FUQ-B	WALL MOUNTED FAQ-B	CEILING SUSPENDED FDQ-B	CEILING SUSPENDED FHQ-B
RZQS71~140D (1 Phase)	•	•	•		•	•	•

SEASONAL INVERTER							
	4 WAY CASSETTE 600x600 FFQ-B	ROUND FLOW CASSETTE FCQ-C	CEILING SUSPENDED 4 WAY CASSETTE FCQH-D	CONCEALED CEILING FUQ-B	WALL MOUNTED FAQ-B	CEILING SUSPENDED FDQ-B	CEILING SUSPENDED FHQ-B
RZQ71~140D (1 Phase)	•	•	•	•	•	•	•
RZQ100~140BW1 (3 Phase)	•	•	•	•	•	•	•

SUPER INVERTER							
	4 WAY CASSETTE 600x600 FFQ-B	ROUND FLOW CASSETTE FCQ-C	CEILING SUSPENDED 4 WAY CASSETTE FCQH-D	CONCEALED CEILING FUQ-B	WALL MOUNTED FAQ-B	CEILING SUSPENDED FDQ-B	CEILING SUSPENDED FHQ-B
RZQ200~250CY1 (3 Phase)	•	•	•	•	•	•	•

POSSIBLE COMBINATIONS							
	TWIN		TRIPLE		DOUBLE TWIN		
RZQ71 RZQS71	35+35 (KHRQ22M20TA)						
RZQ100* RZQS100	50+50 (KHRQ22M20TA)		35+35+35 (KHRQ127H)				
RZQ125* RZQS125	60+60 (KHRQ22M20TA)		50+50+50 (KHRQ127H)		35+35+35+35 (3 x KHRQ22M20TA)		
RZQ140* RZQS140	71+71 (KHRQ22M20TA)		50+50+50 (KHRQ22M20TA)		35+35+35+35 (3 x KHRQ22M20TA)		
RZQ200	100+100 (KHRQ22M20TA)		60+60+60 71+71+71 (KHRQ250H7)		50+50+50+50 (3 x KHRQ22M20TA)		
RZQ250	125+125 (KHRQ22M20TA)				60+60+60+60 (3 x KHRQ22M20TA)		

* Note: For RZQ100,125,140EW1 in combination with FCQ35~71C8 or FCQH71D8, use the refrigerant branch piping KHRQ58T for twin, KHRQ58H for triple and KHRQ58T for double twin application.



RZQS

Comfort Inverter Heat Pump



HEAT PUMP			FAQ71B
Indoor Units			290x1050x230
Dimensions	(Height x Width x Depth)	mm	
Weight		kg	13.0
Air Flow Rate	Cooling	High/Low m³/min	19.0 / 15.0
	Heating	High/Low m³/min	19.0 / 15.0
Sound Power	Cooling	High/Low dBA	59.0 / 53.0
Sound Pressure	Cooling	High/Low dBA	43.0 / 37.0
	Heating	High/Low dBA	43.0 / 37.0
Refrigerant		Type	R-410A
Power Supply			1~/220-240V/50Hz



HEAT PUMP			FAQ71B
Indoor Units			FAQ71C
Dimensions	(Height x Width x Depth)	mm	300x1000x700
Weight		kg	34
Air Flow Rate	Cooling	High/Low m³/min	18 / 15
	Heating	High/Low m³/min	18 / 15
Sound Power	Cooling	High	57
Sound Pressure	Cooling	High/Low dBA	37 / 29
	Heating	High/Low dBA	37 / 29
Refrigerant		Type	R-410A
Power Supply			1~/230V/50Hz



HEAT PUMP			FAQ71C
Indoor Units			FAQ71C8
Dimensions	(Height x Width x Depth)	mm	204x840x840
Weight		kg	19
Air Flow Rate	Cooling	High/Low m³/min	10.0 / 8.5
	Heating	High/Low m³/min	12.5 / 10.0
Sound Power level	Cooling	High	49
Sound Pressure	Cooling	High/Low dBA	31 / 27
	Heating	High/Low dBA	31 / 27
Refrigerant		Type	R-410A
Power Supply			1~/220-240V/50/60Hz

1~/220-240V/50/60Hz



HEAT PUMP			
Indoor Units			FCQH71D8
Dimensions	(Height x Width x Depth)	mm	246x840x840
Weight		kg	23
Air Flow Rate	Cooling	High/Low m³/min	21.9 / 12.1
	Heating	High/Low m³/min	21.9 / 12.1
Sound Power	Cooling	High dBA	54
Sound Pressure	Cooling	High/Low dBA	36 / 28
	Heating	High/Low dBA	36 / 28
Refrigerant		Type	R-410A
Power Supply			1~/220-240V/50-60Hz



HEAT PUMP					
Indoor Units			FFQ35BV	FFQ50BV	FFQ60BV
Dimensions	(Height x Width x Depth)	mm		286x575x575	
Weight		kg		17,5	
Air Flow Rate	Cooling	High/Low m³/min	10.0 / 6.5	12.0 / 8.0	15.0 / 10.0
	Heating	High/Low m³/min	10.0 / 6.5	12.0 / 8.0	15.0 / 10.0
Sound Power	Cooling	High dBA	49.0	53.0	58.0
Sound Pressure	Cooling	High/Low dBA	32.0 / 25.0	36.0 / 27.0	41.0 / 32.0
	Heating	High/Low dBA	32.0 / 25.0	36.0 / 27.0	41.0 / 32.0
Refrigerant		Type		R-410A	
Power Supply				1~/230V/50Hz	



HEAT PUMP						
Indoor Units			FHQ35B	FHQ50B	FHQ60B	FHQ71B
Dimensions	(Height x Width x Depth)	mm	195x960x680		195x1160x680	
Weight		kg	24.0	25.0	27.0	
Air Flow Rate	Cooling	High/Low m³/min	13.0 / 10.0		17.0 / 13.0	17.0 / 14.0
	Heating	High/Low m³/min	13.0 / 10.0		16.0 / 13.0	17.0 / 14.0
Sound Power	Cooling	High/Low dBA	53.0 / 48.0	54.0 / 49.0	55.0 / 49.0	55.0 / 51.0
Sound Pressure	Cooling	High/Low dBA	37.0 / 32.0	38.0 / 33.0	39.0 / 33.0	39.0 / 35.0
	Heating	High/Low dBA	37.0 / 32.0	38.0 / 33.0	39.0 / 33.0	39.0 / 35.0
Refrigerant		Type		R-410A		
Power Supply				1~/220-240V/50Hz		



HEAT PUMP			INVERTER			
Outdoor Unit			RZQS71DV1	RZQS100DV1	RZQS125DV1	RZQS140DV1
Dimensions	(Height x Width x Depth)	mm	770x900x320	1170x900x320	1170x900x320	1170x900x320
Weight		kg	68	103	103	103
Sound pressure level	Cooling (Night quiet mode)	dBA	49 (47)	51 (49)	51 (49)	52 (50)
	Heating	dBA	51	55	53	54
Sound power level	Cooling	dBA	65	67	67	68
Operation Range	Cooling	Min~Max °CDB		-5~46		
	Heating	Min~Max °CWB		-15~15.5		
Refrigerant		Type		R-410A		
Power Supply				1~/220-240V/50Hz		
Piping connections	Liquid (OD)/Gas/Drain	mm		9.52 / 15.9 / 26		
Piping Length (Maximum)		m	30		50	
Max. internunit level difference		m	15		30	



Seasonal Inverter

Super Inverter

RZQ-E

Seasonal Inverter
Heat Pump

RZQ-C

Super Inverter
Heat Pump



HEAT PUMP		
Indoor Units		
Dimensions	(Height x Width x Depth)	mm
Weight	kg	13.0
Air Flow Rate	Cooling	High/Low m³/min
	Heating	High/Low m³/min
Sound Power	Cooling	High/Low dBA
Sound Pressure	Cooling	High/Low dBA
Refrigerant	Type	R-410A
Power Supply		1~/220-240V/50Hz

FAQ71B

FAQ100B

360x1570x200

26.0

23.0 / 19.0

23.0 / 19.0

61.0 / 57.0

45.0 / 41.0

45.0 / 41.0



HEAT PUMP		
Indoor Units		
Dimensions	(Height x Width x Depth)	mm
Weight	kg	25
Air Flow Rate	Cooling	High/Low m³/min
	Heating	High/Low m³/min
Sound Power	Cooling	High dBA
Sound Pressure	Cooling	High/Low dBA
Refrigerant	Type	R-410A
Power Supply		1~/230V/50Hz

FAQ35C

FAQ50C

FAQ60C

FAQ71C

FAQ100C



300x1400x700

45

33 / 28



HEAT PUMP		
Indoor Units		
Dimensions	(Height x Width x Depth)	mm
Weight	kg	59.0
Air Flow Rate	Cooling	Medium m³/min
	Heating	Medium m³/min
Sound Power	Cooling	Medium dBA
Sound Pressure	Cooling	High dBA
Refrigerant	Type	R-410A
Power Supply		1~/230V/50Hz

FDQ125B

350x1400x662

43.0

43.0

75.0

44.0

44.0



HEAT PUMP		
Indoor Units		
Dimensions	(Height x Width x Depth)	mm
Weight	kg	19
Air Flow Rate	Cooling	High/Low m³/min
	Heating	High/Low m³/min
Sound Power level	Cooling	High dBA
Sound Pressure	Cooling	High/Low dBA
Refrigerant	Type	R-410A
Power Supply		1~/220-240V/50/60Hz

FCQ35C8

FCQ50C8

FCQ60C8

FCQ71C8

FCQ100C8

FCQ125C8

204x840x840 204x840x840 204x840x840 204x840x840 256x840x840 256x840x840

23

23

23.5 / 16.0 27.5 / 19.0

23.5 / 16.0 27.5 / 19.0

54

58

37 / 32 41 / 35

37 / 32 41 / 35

R-410A R-410A

1~/220-240V/50/60Hz 1~/220-240V/50/60Hz

1~/220-240V/50/60Hz

1~/220-240V/50/60Hz 1~/220-240V/50/60Hz



HEAT PUMP			FCQH71D8	FCQH100D8	FCQH125D8
Indoor Units					
Dimensions	(Height x Width x Depth)	mm	246x840x840	288x840x840	
Weight	kg		23	25	
Air Flow Rate	Cooling	High/Low m³/min	21.9 / 12.1	34.2 / 17.6	34.2 / 21.2
	Heating	High/Low m³/min	21.9 / 12.1	34.2 / 17.6	34.2 / 21.2
Sound Power	Cooling	High dBA	54	62	62
Sound Pressure	Cooling	High/Low dBA	36 / 28	45 / 32	45 / 36
	Heating	High/Low dBA	36 / 28	45 / 32	45 / 36
Refrigerant	Type		R-410A		
Power Supply			1~220-240V/50-60Hz		



HEAT PUMP			FFQ35BV	FFQ50BV	FFQ60BV
Indoor Units					
Dimensions	(Height x Width x Depth)	mm		286x575x575	
Weight	kg			17.5	
Air Flow Rate	Cooling	High/Low m³/min	10.0 / 6.5	12.0 / 8.0	15.0 / 10.0
	Heating	High/Low m³/min	10.0 / 6.5	12.0 / 8.0	15.0 / 10.0
Sound Power	Cooling	High dBA	49.0	53.0	58.0
Sound Pressure	Cooling	High/Low dBA	32.0 / 25.0	36.0 / 27.0	41.0 / 32.0
	Heating	High/Low dBA	32.0 / 25.0	36.0 / 27.0	41.0 / 32.0
Refrigerant	Type		R-410A		
Power Supply			1~230V/50Hz		



HEAT PUMP			FHQ35B	FHQ50B	FHQ60B	FHQ71B	FHQ100B	FHQ125B
Indoor Units								
Dimensions	(Height x Width x Depth)	mm	195x960x680		195x1160x680		195x1400x680	195x1590x680
Weight	kg		24.0	25.0	27.0	32.0	35.0	
Air Flow Rate	Cooling	High/Low m³/min	13.0 / 10.0	17.0 / 13.0	17.0 / 14.0	24.0 / 20.0	30.0 / 25.0	
	Heating	High/Low m³/min	13.0 / 10.0	16.0 / 13.0	17.0 / 14.0	24.0 / 20.0	30.0 / 25.0	
Sound Power	Cooling	High/Low dBA	53.0 / 48.0	54.0 / 49.0	55.0 / 49.0	55.0 / 51.0	58.0 / 53.0	60.0 / 55.0
Sound Pressure	Cooling	High/Low dBA	37.0 / 32.0	38.0 / 33.0	39.0 / 33.0	39.0 / 35.0	42.0 / 37.0	44.0 / 39.0
	Heating	High/Low dBA	37.0 / 32.0	38.0 / 33.0	39.0 / 33.0	39.0 / 35.0	42.0 / 37.0	44.0 / 39.0
Refrigerant	Type		R-410A					
Power Supply			1~220-240V/50Hz					



HEAT PUMP			FUQ71B	FUQ100B	FUQ125B
Indoor Units					
Dimensions	(Height x Width x Depth)	mm	165x895x895		230x895x895
Weight	kg		25		31
Air Flow Rate	Cooling	High/Low m³/min	19/14	29/21	32/23
	Heating	High/Low m³/min	19/14	29/21	32/23
Sound Power	Cooling	High/Low dBA	40/35	43/38	44/39
Sound Pressure	Cooling	High/Low dBA	56/51	59/54	60/55
	Heating	High/Low dBA	56/51	59/54	60/55
Refrigerant	Type		R-410A		
Power Supply			1~220-240V/50Hz		



HEAT PUMP			SEASONAL INVERTER							SUPER INVERTER	
Outdoor Unit			RZQ71EV1	RZQ100EV1	RZQ100EW1	RZQ125EV1	RZQ125EW1	RZQ140EV1	RZQ140EW1	RZQ200C7Y1B	RZQ250C7Y1B
Dimensions	(Height x Width x Depth)	mm	770x900x320			1345x900x320				1680x930x765	1680x930x765
Weight	kg		67	108	106	108	106	108	106	183	184
Sound pressure level	Cooling (Night quiet mode)	dBA	48 (43)	50 (45)	50 (45)	51 (45)	50 (45)	51 (46)	50 (45)	57 (-)	57 (-)
	Heating	dBA	50	52	52	53	52	53	52	-	-
Sound power level	Cooling	dBA	64	65	65	67	66	68	66	78	78
Operation Range	Cooling	Min~Max °CDB								-15.0~50.0	
	Heating	Min~Max °CWB								-20.0~15.5	
Refrigerant	Type									R-410A	
Power Supply			1~230V/50Hz	1~230V/50Hz	3N~400V/50Hz	1~230V/50Hz	3N~400V/50Hz	1~230V/50Hz	3N~400V/50Hz	3N~380~415V/50Hz	3N~380~415V/50Hz
Piping connections	Liquid (OD)/Gas/Drain	mm				9.52	15.9 / 26			9.5 / 22.2 / -	12.7 / 22.2 / -
Piping Length (Maximum)		m						75		100	100
Max. internunit level difference		m							30		



Multi Model Application



MXU & MXS

Installation flexibility

A very wide range is available, from 2-port to 5-port condensing units, making all applications possible. Up to 5 indoor units can be connected to 1 Multi outdoor unit. All indoor units can be individually controlled with remote control and do not need to be installed in the same room or even at the same time. The outdoor units are neat and sturdy and can be mounted easily on a roof or terrace or simply placed against an outside wall.

Wide choice of indoor units:

MXU

It is possible to combine wall mounted indoor units.

MXS

It is possible to combine different types of indoor units:

- wall mounted
- floor standing
- round flow cassette
- ceiling suspended
- flexi type
- concealed ceiling
- 4-way cassette 600x600

Outdoor Multi split units are fitted with the Daikin swing compressor, renowned for its low noise and high energy efficiency.

RMXS


Installation flexibility

Up to 9 indoor units can be connected to 1 Multi outdoor unit. All indoor units can be individually controlled with remote control and do not need to be installed in the same room or even at the same time. Narrow refrigerant piping makes handling and connecting easier, resulting in significantly reduced installation time. The BP unit varies the refrigerant volume to meet the cooling or heating requirements of a room. The improved BP unit is easier to disassemble, making repairing and recycling more simple. The REFNET joint both reduces the amount of work involved in installation and increases the reliability of the system. A maximum total piping length of 145m offers much more flexibility in the choice of installation position for the indoor units and greatly simplifies system planning.

Wide choice of indoor units:

It is possible to combine different types of indoor units:

- wall mounted
- flexi type
- floor standing
- concealed ceiling
- round flow cassette
- 4-way cassette 600x600
- ceiling suspended

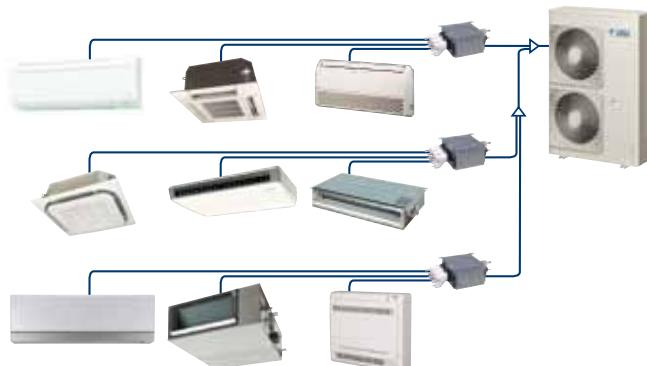



Ururu Multi


The Daikin Ururu Multi heat pump system is unique in its ability to supply comfort cooling, heating, humidification and fresh air ventilation.

Designed primarily for two room residential use, the system comprises visually attractive wall mounted indoor units and a robust outdoor unit that can be installed on a balcony or against a wall.

For the humidification, called "Ururu" in Japanese, moisture is absorbed from the outdoor air. Subsequently, this humidified outdoor air streams into the indoor unit and is evenly distributed throughout the indoor areas. The Ururu Multi, therefore, works without a water reservoir and serves to evenly distribute humidified air.

Humid heat operation however, is only available during the heat function.

Unlike the conventional multi system, the Ururu Multi brings fresh, conditioned air into the room. Furthermore, the temperature of the incoming air is brought to the desired level without cold or heat loss. Another benefit is that the air supply fan is accommodated in the outdoor unit, which means that you will never be bothered by any fan noises.

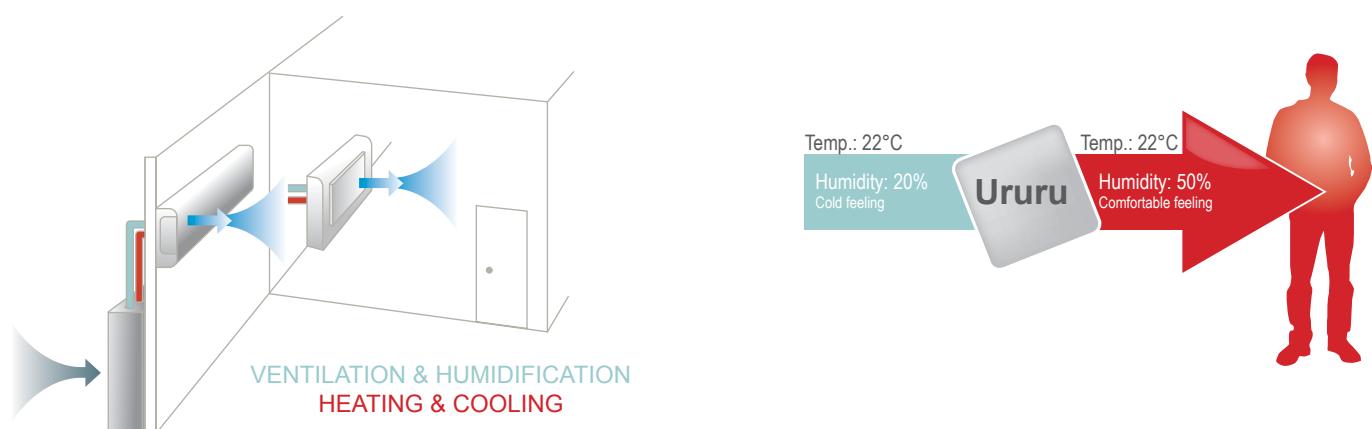

- > URURU humidification: maintains a comfortable humidity level without any separate water supply
- > Fresh air supply for healthy living
- > Up to 2 indoor units can be connected to 1 Multi outdoor unit. All indoor units are individually controllable with remote control and do not need to be installed in the same room or at the same time.
- > 2 area intelligent eye: air flow is sent to the area in a room where no person is detected



MXU-G

Multi Model Application Inverter Controlled



HEATING & COOLING

CONNECTABLE INDOOR UNITS						
Indoor units			CTXU25G2V1B	CTXU35G2V1B	CTXU42G2V1B	CTXU50G2V1B
Dimensions	Height x Width x Depth	mm	295x800x215	295x800x215	295x800x215	295x800x215
Weight		kg	9	10	10	10
Air Flow Rate	Cooling	High	m³/min	9.1	10.4	9.1
	Heating	High	m³/min	9.8	10.6	11.2
Sound Power	Cooling	High	dBA	54	58	58
	Heating	High	dBA	55	58	60
Sound Pressure	Cooling	SH/H/M/L	dBA	38 / 32 / 25 / 22	42 / 34 / 26 / 23	42 / 38 / 33 / 30
	Heating	H/M/L/SO	dBA	39 / 34 / 28 / 25	42 / 36 / 29 / 26	42 / 38 / 33 / 30
Refrigerant	Type		R-410A			
Power Supply	1~220-230-240V/50Hz					



CONNECTABLE OUTDOOR UNITS				
Outdoor Units			2MXU40GV1B	2MXU50GV1B
Dimensions	Height x Width x Depth	mm	675x765x285	675x765x285
Weight		kg	45	49
Operation Range	Cooling	Min-Max	°CDB	10~46
	Heating	Min-Max	°CWB	-15~15.5
Sound Power	Cooling	dBA	62	63
Sound Pressure (High)	Cooling	dBA	47	48
	Heating	dBA	48	50
Refrigerant	Type		R-410A	R-410A
Power Supply	1~220-240V/50Hz			
Piping connections	Liquid (OD)/Gas/Drain	mm	6.35 / 9.52 / 18	6.35 / 9.52 - 12.7 / 18
Piping Length (Maximum)	m		30 (for total of each room) / 15 (for one room)	30 (for total of each room) / 15 (for one room)
Max. internunit level difference	m		7.5	7.5

Combination Tables

Ururu Multi

COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)		TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC
		A ROOM	B ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
2MXU40GV1B	2.5	2.50	---	1.50	2.50	3.00	0.330	0.610	0.800	4.10	A	305
	3.5	3.50	---	1.50	3.50	4.00	0.330	1.050	1.360	3.33	A	525
	2.5+2.5	2.00	2.00	1.75	4.00	4.40	0.310	1.020	1.230	3.92	A	510
	2.5+3.5	1.80	2.20	1.75	4.00	4.60	0.310	0.990	1.310	4.04	A	495

HEATING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)		TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			COP	ENERGY LABEL
		A ROOM	B ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.		
2MXU40GV1B	2.5	3.40	---	1.10	3.40	4.10	0.260	1.020	1.480	3.33	C
	3.5	3.80	---	1.10	3.80	4.40	0.260	1.280	1.720	2.97	D
	2.5+2.5	2.20	2.20	1.40	4.40	4.70	0.250	1.030	1.160	4.27	A
	2.5+3.5	2.05	2.35	1.40	4.40	4.70	0.240	0.990	1.110	4.44	A

Note: Connected to 2.5,3.5 class of wall mounted unit CTXU-G

COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)		TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC
		A ROOM	B ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
2MXS50G2V1B	2.5	2.50	---	1.60	2.50	3.10	0.330	0.560	0.800	4.46	A	280
	3.5	3.50	---	1.60	3.50	4.00	0.320	0.940	1.240	3.72	A	470
	4.2	4.20	---	1.60	4.20	4.70	0.320	1.380	1.850	3.04	B	690
	5.0	5.00	---	1.60	5.00	5.10	0.320	1.940	2.070	2.58	E	970
	2.5+2.5	2.50	2.50	1.95	5.00	5.30	0.340	1.380	1.610	3.62	A	690
	2.5+3.5	2.08	2.92	1.95	5.00	5.40	0.340	1.340	1.610	3.73	A	670
	2.5+4.2	1.87	3.13	1.95	5.00	5.50	0.340	1.330	1.720	3.76	A	665
	2.5+5.0	1.67	3.33	1.95	5.00	5.50	0.340	1.300	1.700	3.85	A	650
	3.5+3.5	2.50	2.50	1.98	5.00	5.40	0.340	1.290	1.550	3.88	A	645
	3.5+4.2	2.27	2.73	1.98	5.00	5.50	0.340	1.280	1.650	3.91	A	640
	3.5+5.0	2.06	2.94	1.98	5.00	5.50	0.340	1.270	1.620	3.94	A	635
	4.2+4.2	2.50	2.50	1.98	5.00	5.50	0.340	1.270	1.620	3.94	A	635

HEATING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)		TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			COP	ENERGY LABEL
		A ROOM	B ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.		
2MXS50G2V1B	2.5	3.40	---	1.16	3.40	4.10	0.220	0.940	1.270	3.62	A
	3.5	4.00	---	1.16	4.00	4.60	0.220	1.180	1.460	3.39	C
	4.2	4.70	---	1.16	4.70	5.10	0.220	1.490	1.730	3.15	D
	5.0	5.40	---	1.28	5.40	5.60	0.230	1.770	1.910	3.05	D
	2.5+2.5	2.80	2.80	1.18	5.60	5.80	0.220	1.380	1.430	4.06	A
	2.5+3.5	2.38	3.32	1.24	5.70	6.00	0.230	1.340	1.450	4.25	A
	2.5+4.2	2.13	3.57	1.25	5.70	6.10	0.230	1.330	1.470	4.29	A
	2.5+5.0	1.90	3.80	1.35	5.70	6.30	0.230	1.320	1.520	4.32	A
	3.5+3.5	2.85	2.85	1.30	5.70	6.10	0.230	1.330	1.460	4.29	A
	3.5+4.2	2.59	3.11	1.31	5.70	6.20	0.230	1.320	1.480	4.32	A
	3.5+5.0	2.35	3.35	1.35	5.70	6.40	0.230	1.310	1.560	4.35	A
	4.2+4.2	2.85	2.85	1.32	5.70	6.30	0.230	1.310	1.500	4.35	A

Note: Connected to 2.5,3.5,4.2,5.0 class of wall mounted unit CTXU-G





INVERTER

MXS-E/F/G

Inverter Heat Pump

HEAT PUMP																														
Outdoor Units		WALL MOUNTED							FLEXI TYPE				FLOOR STANDING			SLIM CONCEALED CEILING			CONCEALED CEILING			ROUND FLOW CASSETTE			4-WAY BLOW CASSETTE 600X600			CEILING		
		F(C)TXG-J		FTXS-G					FLX-B		FVXS-F		FDXS-E/C		FDBQ-B/FBQ-C		FCQ-C8		FFQ-B		FHQ-B									
2MXS40G	• •	• • • • •	20 25 35 42 50 60 71	25 35 50 60	25 35 50 60	25E 35E 50C 60C	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60		
2MXS50G	• • • • •	• • • • •	20 25 35 42 50 60 71	25 35 50 60	25 35 50 60	25E 35E 50C 60C	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60		
3MXS52E	• • • • •	• • • • •	20 25 35 42 50 60 71	25 35 50 60	25 35 50 60	25E 35E 50C 60C	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60		
3MXS68G	• • • • •	• • • • •	20 25 35 42 50 60 71	25 35 50 60	25 35 50 60	25E 35E 50C 60C	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60		
4MXS68F	• • • • •	• • • • •	20 25 35 42 50 60 71	25 35 50 60	25 35 50 60	25E 35E 50C 60C	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60		
4MXS80E	• • • • •	• • • • •	20 25 35 42 50 60 71	25 35 50 60	25 35 50 60	25E 35E 50C 60C	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60		
5MXS90E	• • • • •	• • • • •	20 25 35 42 50 60 71	25 35 50 60	25 35 50 60	25E 35E 50C 60C	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60	25 35 50 60	35 50 60		



HEAT PUMP																																																																														
Indoor Units		FTXG25JW							FTXG25JS							FTXG35JW							FTXG35JS																																																							
		FTXG25JW		FTXG25JS					FTXG35JW		FTXG35JS																																																																			
Dimensions	(Height x Width x Depth)	mm																																																																												
Weight	kg	11.0																																																																												
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.8 / 6.8 / 4.7 / 3.8																																																																										
	Heating	H/M/L/SL	m³/min	9.6 / 7.9 / 6.2 / 5.4																																																																										
Sound Power	Cooling	High	dBA	54.0																																																																										
	Heating	High	dBA	55.0																																																																										
Sound Pressure	Cooling	H/M/L/SL	dBA	38.0 / 32.0 / 25.0 / 22.0																																																																										
	Heating	H/M/L/SL	dBA	39.0 / 34.0 / 28.0 / 25.0																																																																										
Refrigerant	Type	R-410A																																																																												
Power Supply		1~220-240V/50Hz																																																																												



HEAT PUMP																																																																						
Indoor Units		FTXS20G							FTXS25G							FTXS35G							FTXS42G							FTXS50G							FTXS60G							FTXS71G																										
		FTXS20G		FTXS25G					FTXS35G		FTXS42G					FTXS50G		FTXS60G					FTXS71G																																															
Dimensions	(Height x Width x Depth)	mm																																																																				
Weight	kg	9																																																																				
Air Flow Rate	Cooling	H/M/L/SL	m³/min	9.4 / 7.4 / 5.5 / 4.0																																																																		




HEAT PUMP			FLXS25B	FLXS35B	FLXS50B	FLXS60B
Indoor Units						
Dimensions	(Height x Width x Depth)	mm		490x1050x200		
Weight		kg	16.0		17.0	
Air Flow Rate	Cooling	H/M/L/SL	m³/min	7.60 / 6.80 / 6.00 / 5.2	8.60 / 7.60 / 6.60 / 5.6	11.40 / 10.00 / 8.50 / 7.6
	Heating	H/M/L/SL	m³/min	9.20 / 8.30 / 7.40 / 6.6	9.80 / 8.90 / 8.00 / 7.2	12.1 / 9.8 / 7.5 / 6.8
Sound Power	Cooling	High	dBA	53.0	54.0	63.0
	Heating	High	dBA	-		62.0
Sound Pressure	Cooling	H/M/L/SL	dBA	37.0 / 34.0 / 31.0 / 28.0	38.0 / 35.0 / 32.0 / 29.0	47.0 / 43.0 / 39.0 / 36.0
	Heating	H/M/L/SL	dBA	37.0 / 34.0 / 31.0 / 29.0	39.0 / 36.0 / 33.0 / 30.0	46.0 / 41.0 / 35.0 / 33.0
Refrigerant		Type		R-410A		
Power Supply				1~/220-240/220-230V/50/60Hz		



HEAT PUMP			FVXS25F	FVXS35F	FVXS50F
Indoor Units					
Dimensions	(Height x Width x Depth)	mm		600x700x210	
Weight		kg	14		
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.2 / 6.5 / 4.8 / 4.1	8.5 / 6.7 / 4.9 / 4.5
	Heating	H/M/L/SL	m³/min	8.8 / 6.9 / 5.0 / 4.4	9.4 / 7.3 / 5.2 / 4.7
Sound Power	Cooling	High	dBA	54	55
	Heating	High	dBA	54	55
Sound Pressure	Cooling	H/M/L/SL	dBA	38 / 32 / 26 / 23	39 / 33 / 27 / 24
	Heating	H/M/L/SL	dBA	38 / 32 / 26 / 23	39 / 33 / 27 / 24
Refrigerant		Type		R-410A	
Power Supply				1~/220-240V/50Hz	



HEAT PUMP			FDXS25E	FDXS35E
Indoor Units				
Dimensions	(Height x Width x Depth)	mm	200x700x620	
Weight		kg	21.0	
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.7 / 8.0 / 7.3 / 6.2
	Heating	H/M/L/SL	m³/min	8.7 / 8.0 / 7.3 / 6.2
Sound Power	Cooling	High	dBA	53.0
	Heating	High	dBA	53.0
Sound Pressure	Cooling	H/M/L/SL	dBA	35.0 / 33.0 / 31.0 / 29.0
	Heating	H/M/L/SL	dBA	35.0 / 33.0 / 31.0 / 29.0
Refrigerant		Type		R-410A
Power Supply				1~/220-240/220-230V/50/60Hz

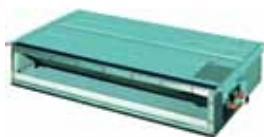

HEAT PUMP				
Indoor Units			FDXS50C	FDXS60C
Dimensions	(Height x Width x Depth)	mm	200x900x620	200x1100x620
Weight		kg	27.0	30.0
Air Flow Rate	Cooling	H/M/L/SL	m³/min	12.0 / 11.0 / 10.0 / 8.4
	Heating	H/M/L/SL	m³/min	12.0 / 11.0 / 10.0 / 8.4
Sound Power	Cooling	High	dBA	55.0
	Heating	High	dBA	55.0
Sound Pressure	Cooling	H/M/L/SL	dBA	37.0 / 35.0 / 33.0 / 31.0
	Heating	H/M/L/SL	dBA	37.0 / 35.0 / 33.0 / 31.0
Refrigerant		Type	R-410A	
Power Supply			220-240/220-230V/50/60Hz	



HEAT PUMP				
Indoor Units			FDBQ25B	
Dimensions	(Height x Width x Depth)	mm	230x652x502	
Weight		kg	17.0	
Air Flow Rate	Cooling	High/Low	m³/min	6.50 / 5.20
	Heating	High/Low	m³/min	6.95 / 5.20
Sound Power	Cooling	High/Low	dBA	55.0 / 49.0
	Heating	High/Low	dBA	55.0 / 49.0
Sound Pressure	Cooling	High/Low	dBA	35.0 / 28.0
	Heating	High/Low	dBA	35.0 / 29.0
Refrigerant		Type	R-410A	
Power Supply			1~230V/50Hz	



HEAT PUMP					
Indoor Units			FBQ35C	FBQ50C	FBQ60C
Dimensions	(Height x Width x Depth)	mm	300x700x700	300x1000x700	
Weight		kg	25	25	34
Air Flow Rate	Cooling	High/Low	m³/min	16 / 11	16 / 11
	Heating	High/Low	m³/min	16 / 11	16 / 11
Sound Power	Cooling	High	dBA	63	63
Sound Pressure	Cooling	High/Low	dBA	37 / 29	37 / 29
	Heating	High/Low	dBA	37 / 29	37 / 29
Refrigerant		Type	R-410A		
Power Supply			1~230V/50Hz		



HEAT PUMP						
Indoor Units			FFQ25BV	FFQ35BV	FFQ50BV	FFQ60BV
Dimensions	(Height x Width x Depth)	mm		286x575x575		
Weight		kg		17.5		
Air Flow Rate	Cooling	High/Low	m³/min	9.0 / 6.5	10.0 / 6.5	12.0 / 8.0
	Heating	High/Low	m³/min	9.0 / 6.5	10.0 / 6.5	12.0 / 8.0
Sound Power	Cooling	High	dBA	46.5	49.0	53.0
Sound Pressure	Cooling	High/Low	dBA	29.5 / 24.5	32.0 / 25.0	36.0 / 27.0
	Heating	High/Low	dBA	29.5 / 24.5	32.0 / 25.0	36.0 / 27.0
Refrigerant		Type	R-410A			
Power Supply			1~230V/50Hz			



HEAT PUMP			FCQ35C8	FCQ50C8	FCQ60C8
Indoor Units					
Dimensions	(Height x Width x Depth)	mm		204x840x840	
Weight		kg		19	
Air Flow Rate	Cooling	High/Low	m³/min	10.5 / 8.5	12.5 / 8.5
	Heating	High/Low	m³/min	12.5 / 10.0	12.5 / 8.5
Sound Power	Cooling	High	dBA	49	51
Sound Pressure	Cooling	High/Low	dBA	31 / 27	33 / 28
	Heating	High/Low	dBA	31 / 27	33 / 28
Refrigerant		Type		R-410A	
Power Supply				1~220-240V/50/60Hz	



HEAT PUMP			FHQ35B	FHQ50B	FHQ60B
Indoor Units					
Dimensions	(Height x Width x Depth)	mm		195x960x680	
Weight		kg	24.0	25.0	27.0
Air Flow Rate	Cooling	High/Low	m³/min	13.0 / 10.0	17.0 / 13.0
	Heating	High/Low	m³/min	13.0 / 10.0	16.0 / 13.0
Sound Power	Cooling	High/Low	dBA	53.0 / 48.0	55.0 / 49.0
	Heating	High/Low	dBA	53.0 / 48.0	55.0 / 49.0
Sound Pressure	Cooling	High/Low	dBA	37.0 / 32.0	39.0 / 33.0
	Heating	High/Low	dBA	37.0 / 32.0	39.0 / 33.0
Refrigerant		Type		R-410A	
Power Supply				1~220-240V/50Hz	



HEAT PUMP			INVERTER		
Outdoor Unit			2MXS40G	2MXS50G	3MXS68G
Dimensions	(Height x Width x Depth)	mm		550x765x285	735x936x300
Weight		kg	38	42	58
Operation Range	Cooling	Min~Max	°CDB	10~46	-10~46
	Heating	Min~Max	°CWB		-15~15.5
Sound Power	Cooling	dBA	62	63	61
Sound Pressure (Low)	Cooling	dBA	43	44	-
	Heating	dBA	44	46	-
Sound Pressure (High)	Cooling	dBA	47		48
	Heating	dBA	48	50	49
Refrigerant		Type		R-410A	
Power Supply				1~220-240V/50Hz	1~230V/50Hz
Piping connections	Liquid (OD)/Gas/Drain	mm	2x6.4 / 2x9.5	2x6.4 / 9.5 12.7	3x6.4 / 9.5 2x12.7
Piping Length (Maximum)		m		30 (total) 20 (for 1 room)	60 (total) 25 (for 1 room)
Max Installation Height Difference		m		15	



HEAT PUMP			INVERTER			
Outdoor Unit			3MXS52E	4MXS68F	4MXS80E	5MXS90E
Dimension	HxWxD	mm	735x936x300	735x936x300	770x900x320	770x900x320
Weight		kg	49	58	72	73
Operation range	Cooling	Min~Max	°CDB	-10~46	-10~46	-10~46
	Heating	Min~Max	°CDB	-15~15.5	-15~15.5	-15~15.5
Sound Power	Cooling	dB(A)	59	61	62	66
Sound Pressure (low)	Cooling	dB(A)	-	-	-	-
	Heating	dB(A)	-	-	-	-
Sound Pressure (high)	Cooling	dB(A)	46	48	48	52
	Heating	dB(A)	47	49	49	52
Refrigerant		Type		R-410A		
Power Supply				1~230V/50Hz		
Piping Connection	Liquid (OD)/Gas	mm	3x6.4 / 2x9.5 12.9	4x6.4 / 2x3.5 2x14.7	4x6.4 / 9.5 12.7 2x15.9	5x6.4 / 2x9.5 12.7 2x15.9
Piping Length (Maximum)		m	50 (total) 25 (for 1 room)	60 (total) 25 (for 1 room)	70 (total) 25 (for 1 room)	75 (total) 25 (for 1 room)
Max Installation Height Difference		m		15		

Combination Tables

Heat Pump R-410A

Inverter Controlled Outdoor Units

COOLING												
OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)		TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC
		A ROOM	B ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
2MXS40G	2.0	2.00	---	1.45	2.00	2.40	0.320	0.450	0.590	4.44	A	225
	2.5	2.50	---	1.45	2.50	3.00	0.320	0.620	0.820	4.03	A	310
	3.5	3.50	---	1.45	3.50	4.00	0.320	1.080	1.410	3.24	A	540
	2.0+2.0	2.00	2.00	1.65	4.00	4.10	0.300	1.090	1.130	3.67	A	545
	2.0+2.5	1.85	2.15	1.65	4.00	4.20	0.300	1.080	1.190	3.70	A	540
	2.0+3.5	1.75	2.25	1.65	4.00	4.40	0.300	1.060	1.310	3.77	A	530
	2.5+2.5	2.00	2.00	1.65	4.00	4.30	0.300	1.070	1.240	3.74	A	535
	2.5+3.5	1.80	2.20	1.65	4.00	4.50	0.300	1.050	1.350	3.81	A	525

HEATING												
OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)		TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL	AEC
		A ROOM	B ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
2MXS40G	2.0	3.00	---	1.20	3.00	3.70	0.290	0.850	1.270	3.53	B	
	2.5	3.40	---	1.20	3.40	4.10	0.290	1.060	1.520	3.21	C	
	3.5	3.80	---	1.20	3.80	4.40	0.290	1.290	1.730	2.95	D	
	2.0+2.0	2.10	2.10	1.50	4.20	4.60	0.270	1.010	1.170	4.16	A	
	2.0+2.5	2.10	2.30	1.50	4.40	4.70	0.270	1.080	1.210	4.07	A	
	2.0+3.5	2.00	2.40	1.50	4.40	4.70	0.260	1.060	1.190	4.15	A	
	2.5+2.5	2.20	2.20	1.50	4.40	4.70	0.270	1.070	1.200	4.11	A	
	2.5+3.5	2.05	2.35	1.50	4.40	4.70	0.260	1.050	1.180	4.19	A	

COOLING												
OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)		TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC
		A ROOM	B ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
2MXS50G	2.0	2.00	---	1.53	2.00	2.60	0.330	0.470	0.690	4.26	A	235
	2.5	2.50	---	1.53	2.50	3.10	0.330	0.660	0.920	3.79	A	330
	3.5	3.50	---	1.53	3.50	4.00	0.330	1.090	1.420	3.21	A	545
	4.2	4.20	---	1.55	4.20	4.70	0.330	1.530	2.050	2.75	D	765
	5.0	5.00	---	1.57	5.00	5.10	0.330	2.060	2.170	2.43	E	1030
	2.0+2.0	2.00	2.00	1.81	4.00	4.90	0.330	1.050	1.530	3.81	A	525
	2.0+2.5	2.00	2.50	1.81	4.50	5.00	0.330	1.290	1.600	3.49	A	645
	2.0+3.5	1.82	3.18	1.81	5.00	5.30	0.330	1.560	1.760	3.21	A	780
	2.0+4.2	1.61	3.39	1.81	5.00	5.40	0.330	1.540	1.800	3.25	A	770
	2.0+5.0	1.43	3.57	1.81	5.00	5.40	0.330	1.470	1.720	3.40	A	735
	2.5+2.5	2.50	2.50	1.81	5.00	5.20	0.330	1.560	1.710	3.21	A	780
	2.5+3.5	2.08	2.92	1.81	5.00	5.30	0.330	1.530	1.760	3.27	A	765
	2.5+4.2	1.87	3.13	1.81	5.00	5.40	0.330	1.500	1.800	3.33	A	750
	2.5+5.0	1.67	3.33	1.81	5.00	5.40	0.330	1.470	1.730	3.40	A	735
	3.5+3.5	2.50	2.50	1.81	5.00	5.30	0.330	1.500	1.720	3.33	A	750
	3.5+4.2	2.27	2.73	1.81	5.00	5.40	0.330	1.470	1.770	3.40	A	735
	3.5+5.0	2.06	2.94	1.81	5.00	5.40	0.330	1.440	1.700	3.47	A	720
	4.2+4.2	2.50	2.50	1.81	5.00	5.40	0.330	1.440	1.730	3.47	A	720

HEATING												
OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)		TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL	AEC
		A ROOM	B ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
2MXS50G	2.0	3.00	---	1.21	3.00	3.70	0.270	0.820	1.140	3.66	A	
	2.5	3.40	---	1.21	3.40	4.10	0.250	0.980	1.330	3.47	B	
	3.5	4.00	---	1.21	4.00	4.60	0.250	1.240	1.530	3.23	C	
	4.2	4.70	---	1.21	4.70	5.10	0.250	1.560	1.770	3.01	D	
	5.0	5.40	---	1.33	5.40	5.60	0.270	1.830	1.980	2.95	D	
	2.0+2.0	2.65	2.65	1.28	5.30	5.70	0.240	1.340	1.530	3.96	A	
	2.0+2.5	2.44	3.06	1.28	5.50	5.80	0.240	1.420	1.560	3.87	A	
	2.0+3.5	2.04	3.56	1.34	5.60	5.90	0.250	1.440	1.570	3.89	A	
	2.0+4.2	1.84	3.86	1.35	5.70	6.00	0.250	1.470	1.590	3.88	A	
	2.0+5.0	1.63	4.07	1.39	5.70	6.20	0.250	1.370	1.610	4.16	A	
	2.5+2.5	2.80	2.80	1.28	5.60	5.80	0.240	1.450	1.550	3.86	A	
	2.5+3.5	2.38	3.32	1.34	5.70	6.00	0.250	1.480	1.640	3.85	A	
	2.5+4.2	2.13	3.57	1.35	5.70	6.10	0.250	1.450	1.660	3.93	A	
	2.5+5.0	1.90	3.80	1.45	5.70	6.30	0.260	1.360	1.650	4.19	A	
	3.5+3.5	2.85	2.85	1.40	5.70	6.10	0.250	1.460	1.650	3.90	A	
	3.5+4.2	2.59	3.11	1.41	5.70	6.20	0.250	1.420	1.660	4.01	A	
	3.5+5.0	2.35	3.35	1.45	5.70	6.40	0.250	1.350	1.650	4.22	A	
	4.2+4.2	2.85	2.85	1.42	5.70	6.30	0.250	1.400	1.680	4.07	A	

COOLING														
OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)			TOTAL CAPACITY (kW)			POWER INPUT COOLING (W)			EER	ENERGY LABEL	AEC (kWh)	
		A ROOM	B ROOM	C ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.				
3MXS52E	2.0	2.00	---	---	1.76	2.00	2.84	350	460	740	4.35	A	230	
	2.5	2.50	---	---	1.76	2.50	3.12	350	620	880	4.03	A	310	
	3.5	3.50	---	---	1.76	3.50	4.18	350	970	1290	3.61	A	485	
	4.2	4.20	---	---	1.76	4.20	4.70	350	1240	1640	3.39	A	620	
	5.0	5.00	---	---	1.79	5.00	5.40	350	1750	2030	2.86	C	875	
	2.0+2.0	2.00	2.00	---	1.88	4.00	5.96	350	950	1910	4.21	A	475	
	2.0+2.5	2.00	2.50	---	1.88	4.50	6.23	350	1180	2140	3.81	A	590	
	2.0+3.5	1.89	3.31	---	1.88	5.20	6.24	350	1550	2070	3.35	A	775	
	2.0+4.2	1.68	3.52	---	1.88	5.20	6.25	350	1550	2070	3.35	A	775	
	2.0+5.0	1.49	3.71	---	1.88	5.20	6.47	350	1420	2070	3.66	A	710	
	2.5+2.5	2.50	2.50	---	1.88	5.00	6.23	350	1450	2140	3.45	A	725	
	2.5+3.5	2.17	3.03	---	1.88	5.20	6.35	350	1550	2250	3.35	A	775	
	2.5+4.2	1.94	3.26	---	1.88	5.20	6.36	350	1550	2250	3.35	A	775	
	2.5+5.0	1.73	3.47	---	1.88	5.20	6.47	350	1420	2070	3.66	A	710	
	3.5+3.5	2.60	2.60	---	1.88	5.20	6.40	350	1550	2250	3.35	A	775	
	3.5+4.2	2.36	2.84	---	1.88	5.20	6.41	350	1550	2250	3.35	A	775	
	3.5+5.0	2.14	3.06	---	1.88	5.20	6.49	350	1420	2090	3.66	A	710	
	4.2+4.2	2.60	2.60	---	1.88	5.20	6.42	350	1550	2250	3.35	A	775	
	2.0+2.0+2.0	1.73	1.73	1.73	1.86	5.19	7.04	350	1240	2160	4.19	A	620	
	2.0+2.0+2.5	1.60	1.60	1.99	1.86	5.19	7.04	350	1240	2160	4.19	A	620	
	2.0+2.0+3.5	1.38	1.38	2.43	1.95	5.19	7.06	370	1240	2160	4.19	A	620	
	2.0+2.0+4.2	1.27	1.27	2.66	1.95	5.20	7.07	370	1240	2160	4.19	A	620	
	2.0+2.0+5.0	1.16	1.16	2.88	2.11	5.20	7.30	380	1220	2260	4.26	A	610	
	2.0+2.5+2.5	1.49	1.85	1.85	1.86	5.19	7.04	350	1240	2160	4.19	A	620	
	2.0+2.5+3.5	1.30	1.63	2.27	1.95	5.20	7.06	370	1240	2160	4.19	A	620	
	2.0+2.5+4.2	1.20	1.49	2.51	1.95	5.20	7.07	370	1240	2160	4.19	A	620	
	2.0+3.5+3.5	1.16	2.02	2.02	1.95	5.20	7.07	370	1240	2160	4.19	A	620	
	2.5+2.5+2.5	1.73	1.73	1.73	1.95	5.19	7.04	370	1240	2160	4.19	A	620	
	2.5+2.5+3.5	1.53	1.53	2.14	1.95	5.20	7.06	370	1230	2160	4.23	A	615	

HEATING														
OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)			TOTAL CAPACITY (kW)			POWER INPUT HEATING (W)			COP	ENERGY LABEL		
		A ROOM	B ROOM	C ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.				
3MXS52E	2.0	2.72	---	---	1.21	2.72	3.75	300	720	1200	3.78	A		
	2.5	3.40	---	---	1.21	3.40	4.00	300	990	1260	3.43	B		
	3.5	4.20	---	---	1.21	4.20	4.82	300	1390	1680	3.02	D		
	4.2	4.70	---	---	1.21	4.70	5.87	300	1700	2400	2.76	E		
	5.0	5.80	---	---	1.33	5.80	6.79	300	2160	2590	2.69	E		
	2.0+2.0	3.05	3.05	---	1.28	6.10	7.00	310	1700	2280	3.59	B		
	2.0+2.5	2.78	3.47	---	1.28	6.25	7.00	310	1750	2280	3.57	B		
	2.0+3.5	2.38	4.17	---	1.34	6.55	7.04	310	1860	2280	3.52	B		
	2.0+4.2	2.16	4.54	---	1.34	6.70	7.05	310	1930	2270	3.47	B		
	2.0+5.0	1.94	4.86	---	1.39	6.80	7.20	310	1870	2320	3.64	A		
	2.5+2.5	3.25	3.25	---	1.28	6.50	7.00	310	1860	2310	3.49	B		
	2.5+3.5	2.79	3.91	---	1.34	6.70	7.19	310	1930	2360	3.47	B		
	2.5+4.2	2.54	4.26	---	1.34	6.80	7.21	310	1930	2350	3.52	B		
	2.5+5.0	2.27	4.53	---	1.45	6.80	7.35	310	1870	2320	3.64	A		
	3.5+3.5	3.40	3.40	---	1.40	6.80	7.22	310	1970	2350	3.45	B		
	3.5+4.2	3.09	3.71	---	1.40	6.80	7.24	310	1970	2350	3.45	B		
	3.5+5.0	2.80	4.00	---	1.45	6.80	7.50	310	1830	2310	3.72	A		
	4.2+4.2	3.40	3.40	---	1.40	6.80	7.26	310	1960	2340	3.47	B		
	2.0+2.0+2.0	2.26	2.26	2.26	1.34	6.78	8.02	320	1570	2140	4.32	A		
	2.0+2.0+2.5	2.09	2.09	2.60	1.34	6.78	8.02	320	1570	2140	4.32	A		
	2.0+2.0+3.5	1.80	1.80	3.18	1.45	6.78	8.05	320	1560	2140	4.35	A		
	2.0+2.0+4.2	1.66	1.66	3.48	1.45	6.80	8.06	320	1560	2140	4.36	A		
	2.0+2.0+5.0	1.51	1.51	3.78	1.67	6.80	8.27	320	1640	2110	4.15	A		
	2.0+2.5+2.5	1.94	2.42	2.42	1.34	6.78	8.02	320	1570	2140	4.32	A		
	2.0+2.5+3.5	1.70	2.13	2.97	1.57	6.80	8.05	320	1560	2140	4.36	A		
	2.0+2.5+4.2	1.56	1.95	3.28	1.56	6.80	8.06	320	1560	2140	4.36	A		
	2.0+3.5+3.5	1.52	2.64	2.64	1.56	6.80	8.08	320	1560	2140	4.36	A		
	2.5+2.5+2.5	2.26	2.26	2.26	1.45	6.78	8.02	320	1570	2140	4.32	A		
	2.5+2.5+3.5	2.00	2.00	2.80	1.57	6.80	8.05	320	1560	2140	4.36	A		

COOLING													
OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)			TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
3MXS68G	2.0	2.00	---	---	1.95	2.00	2.63	0.440	0.470	0.620	4.26	A	235
	2.5	2.50	---	---	1.95	2.50	3.37	0.460	0.590	0.850	4.24	A	295
	3.5	3.50	---	---	1.95	3.50	4.76	0.470	0.910	1.470	3.85	A	455
	4.2	4.20	---	---	1.95	4.20	5.02	0.470	1.210	1.620	3.47	A	605
	5.0	5.00	---	---	1.96	5.00	5.91	0.450	1.710	2.200	2.92	C	855
	6.0	6.00	---	---	1.96	6.00	6.38	0.440	2.050	2.320	2.93	C	1,025
	2.0+2.0	2.00	2.00	---	1.97	4.00	5.02	0.430	1.000	1.450	4.00	A	500
	2.0+2.5	2.00	2.50	---	1.97	4.50	5.33	0.430	1.200	1.610	3.75	A	600
	2.0+3.5	2.00	3.50	---	1.97	5.50	6.18	0.420	1.660	2.150	3.31	A	830
	2.0+4.2	2.00	4.20	---	1.97	6.20	6.38	0.420	2.090	2.300	2.97	C	1,045
	2.0+5.0	1.94	4.86	---	1.97	6.80	7.12	0.410	2.410	2.650	2.82	C	1,205
	2.0+6.0	1.70	5.10	---	1.98	6.80	7.56	0.400	2.210	2.750	3.08	B	1,105
	2.5+2.5	2.50	2.50	---	1.97	5.00	5.98	0.450	1.460	2.000	3.42	A	730
	2.5+3.5	2.50	3.50	---	1.97	6.00	6.44	0.430	2.060	2.370	2.91	C	1,030
	2.5+4.2	2.50	4.20	---	1.97	6.70	6.81	0.430	2.540	2.670	2.64	D	1,270
	2.5+5.0	2.27	4.53	---	1.97	6.80	7.23	0.400	2.410	2.750	2.82	C	1,205
	2.5+6.0	2.00	4.80	---	1.98	6.80	7.56	0.380	2.210	2.750	3.08	B	1,105
	3.5+3.5	3.40	3.40	---	1.97	6.80	6.99	0.410	2.510	2.660	2.71	D	1,255
	3.5+4.2	3.09	3.71	---	1.97	6.80	7.10	0.410	2.510	2.760	2.71	D	1,255
	3.5+5.0	2.80	4.00	---	1.97	6.80	7.61	0.380	2.410	3.120	2.82	C	1,205
	3.5+6.0	2.51	4.29	---	2.28	6.80	7.91	0.430	2.210	3.060	3.08	B	1,105
	4.2+4.2	3.40	3.40	---	1.97	6.80	7.00	0.410	2.510	2.660	2.71	D	1,255
	4.2+5.0	3.10	3.70	---	1.97	6.80	7.62	0.380	2.410	3.120	2.82	C	1,205
	4.2+6.0	2.80	4.00	---	2.28	6.80	7.92	0.430	2.210	3.060	3.08	B	1,105
	5.0+5.0	3.40	3.40	---	2.36	6.80	8.06	0.470	2.310	3.350	2.94	C	1,155
	5.0+6.0	3.09	3.71	---	2.49	6.80	8.28	0.480	2.120	3.280	3.21	A	1,060
	2.0+2.0+2.0	2.00	2.00	2.00	1.98	6.00	6.51	0.420	1.640	1.890	3.66	A	820
	2.0+2.0+2.5	2.00	2.00	2.50	1.98	6.50	6.89	0.420	1.890	2.120	3.44	A	945
	2.0+2.0+3.5	1.81	1.81	3.18	1.98	6.80	7.25	0.410	2.070	2.350	3.29	A	1,035
	2.0+2.0+4.2	1.66	1.66	3.48	1.98	6.80	7.46	0.410	2.070	2.500	3.29	A	1,035
	2.0+2.0+5.0	1.51	1.51	3.78	1.98	6.80	7.85	0.390	2.020	2.690	3.37	A	1,010
	2.0+2.0+6.0	1.36	1.36	4.08	2.33	6.80	8.11	0.440	1.830	2.640	3.72	A	915
	2.0+2.5+2.5	1.94	2.43	2.43	1.98	6.80	7.10	0.410	2.070	2.260	3.29	A	1,035
	2.0+2.5+3.5	1.70	2.13	2.97	1.98	6.80	7.59	0.390	2.070	2.590	3.29	A	1,035
	2.0+2.5+4.2	1.56	1.95	3.29	1.98	6.80	7.78	0.390	2.070	2.750	3.29	A	1,035
	2.0+2.5+5.0	1.43	1.79	3.58	1.98	6.80	7.92	0.390	2.020	2.740	3.37	A	1,010
	2.0+2.5+6.0	1.30	1.62	3.88	2.33	6.80	8.38	0.450	1.830	2.840	3.72	A	915
	2.0+3.5+3.5	1.52	2.64	2.64	1.98	6.80	7.91	0.400	2.070	2.850	3.29	A	1,035
	2.0+3.5+4.2	1.40	2.45	2.95	1.98	6.80	8.09	0.400	2.070	3.010	3.29	A	1,035
	2.0+3.5+5.0	1.30	2.27	3.23	2.30	6.80	8.41	0.440	2.020	3.170	3.37	A	1,010
	2.0+4.2+4.2	1.30	2.75	2.75	1.98	6.80	8.21	0.400	2.070	3.110	3.29	A	1,035
	2.5+2.5+2.5	2.26	2.26	2.26	1.98	6.78	7.38	0.410	2.070	2.450	3.28	A	1,035
	2.5+2.5+3.5	2.00	2.00	2.80	1.98	6.80	7.78	0.390	2.070	2.750	3.29	A	1,035
	2.5+2.5+4.2	1.85	1.85	3.10	1.98	6.80	7.96	0.390	2.070	2.900	3.29	A	1,035
	2.5+2.5+5.0	1.70	1.70	3.40	2.30	6.80	8.28	0.440	2.020	3.060	3.37	A	1,010
	2.5+2.5+6.0	1.55	1.55	3.70	2.44	6.80	8.57	0.440	1.830	3.000	3.72	A	915
	2.5+3.5+3.5	1.78	2.51	2.51	2.29	6.80	8.14	0.440	2.070	3.060	3.29	A	1,035
	2.5+3.5+4.2	1.67	2.33	2.80	2.29	6.80	8.26	0.440	2.070	3.170	3.29	A	1,035
	2.5+3.5+5.0	1.55	2.16	3.09	2.51	6.80	8.57	0.460	1.980	3.330	3.43	A	990
	2.5+4.2+4.2	1.56	2.62	2.62	2.29	6.80	8.32	0.440	2.070	3.220	3.29	A	1,035
	3.5+3.5+3.5	2.26	2.26	2.26	2.40	6.78	8.42	0.430	2.070	3.330	3.28	A	1,035

HEATING												
OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)			TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL
		A ROOM	B ROOM	C ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.		
3MXS68G	2.0	2.72	---	---	1.51	2.72	3.93	0.440	0.740	1.270	3.68	A
	2.5	3.40	---	---	1.47	3.40	4.13	0.430	1.030	1.370	3.30	C
	3.5	4.30	---	---	1.48	4.30	4.52	0.410	1.420	1.610	3.03	D
	4.2	4.50	---	---	1.48	4.50	4.71	0.410	1.510	1.720	2.98	D
	5.0	5.60	---	---	1.65	5.60	5.76	0.390	2.130	2.260	2.63	E
	6.0	7.90	---	---	1.92	7.90	8.57	0.410	2.650	2.920	2.98	D
	2.0+2.0	3.25	3.25	---	1.62	6.50	7.64	0.380	1.870	2.250	3.48	B
	2.0+2.5	3.04	3.81	---	1.62	6.85	7.81	0.380	2.050	2.330	3.34	C
	2.0+3.5	2.71	4.74	---	1.76	7.45	8.34	0.390	2.340	2.640	3.18	D
	2.0+4.2	2.58	5.42	---	1.76	8.00	8.68	0.390	2.640	2.890	3.03	D
	2.0+5.0	2.46	6.14	---	2.14	8.60	10.15	0.480	2.800	3.260	3.07	D
	2.0+6.0	2.15	6.45	---	2.41	8.60	10.34	0.510	2.430	2.980	3.54	B
	2.5+2.5	3.60	3.60	---	1.62	7.20	8.16	0.380	2.240	2.560	3.21	C
	2.5+3.5	3.29	4.61	---	1.85	7.90	8.68	0.400	2.580	2.890	3.06	D
	2.5+4.2	3.10	5.20	---	1.85	8.30	8.93	0.400	2.800	3.070	2.96	D
	2.5+5.0	2.87	5.73	---	2.23	8.60	10.27	0.490	2.800	3.360	3.07	D
	2.5+6.0	2.53	6.07	---	2.50	8.60	10.46	0.530	2.430	3.010	3.54	B
	3.5+3.5	4.30	4.30	---	2.13	8.60	9.02	0.450	2.930	3.110	2.94	D
	3.5+4.2	3.91	4.69	---	2.13	8.60	9.11	0.450	2.920	3.160	2.95	D
	3.5+5.0	3.54	5.06	---	2.51	8.60	10.48	0.540	2.790	3.400	3.08	D
	3.5+6.0	3.17	5.43	---	2.69	8.60	10.59	0.550	2.420	3.000	3.55	B
	4.2+4.2	4.30	4.30	---	2.13	8.60	9.19	0.450	2.920	3.200	2.95	D
	4.2+5.0	3.93	4.67	---	2.51	8.60	10.49	0.540	2.790	3.470	3.08	D
	4.2+6.0	3.54	5.06	---	2.69	8.60	10.60	0.540	2.420	3.030	3.55	B
	5.0+5.0	4.30	4.30	---	2.88	8.60	10.67	0.630	2.700	3.380	3.19	D
	5.0+6.0	3.91	4.69	---	3.08	8.60	10.66	0.640	2.390	2.960	3.60	B
	2.0+2.0+2.0	2.63	2.63	2.63	1.97	7.89	10.04	0.440	2.050	2.700	3.85	A
	2.0+2.0+2.5	2.54	2.54	3.17	2.06	8.25	10.12	0.450	2.180	2.740	3.78	A
	2.0+2.0+3.5	2.29	2.29	4.02	2.26	8.60	10.22	0.470	2.340	2.880	3.68	A
	2.0+2.0+4.2	2.10	2.10	4.40	2.26	8.60	10.22	0.470	2.340	2.880	3.68	A
	2.0+2.0+5.0	1.91	1.91	4.78	2.66	8.60	10.40	0.580	2.340	2.960	3.68	A
	2.0+2.0+6.0	1.72	1.72	5.16	2.87	8.60	10.53	0.580	2.120	2.670	4.06	A
	2.0+2.5+2.5	2.46	3.07	3.07	2.16	8.60	10.13	0.460	2.350	2.840	3.66	A
	2.0+2.5+3.5	2.15	2.69	3.76	2.35	8.60	10.22	0.490	2.340	2.880	3.68	A
	2.0+2.5+4.2	1.98	2.47	4.15	2.36	8.60	10.23	0.490	2.340	2.870	3.68	A
	2.0+2.5+5.0	1.81	2.26	4.53	2.75	8.60	10.63	0.600	2.320	2.990	3.71	A
	2.0+2.5+6.0	1.64	2.05	4.91	2.96	8.60	10.64	0.600	2.100	2.640	4.10	A
	2.0+3.5+3.5	1.92	3.34	3.34	2.64	8.60	10.35	0.550	2.310	2.930	3.72	A
	2.0+3.5+4.2	1.77	3.10	3.72	2.64	8.60	10.35	0.550	2.310	2.920	3.72	A
	2.0+3.5+5.0	1.64	2.87	4.09	2.94	8.60	10.68	0.620	2.290	3.060	3.76	A
	2.0+4.2+4.2	1.65	3.47	3.47	2.64	8.60	10.36	0.550	2.310	2.920	3.72	A
	2.5+2.5+2.5	2.86	2.86	2.86	2.26	8.58	10.24	0.480	2.350	2.870	3.65	A
	2.5+2.5+3.5	2.53	2.53	3.54	2.45	8.60	10.45	0.510	2.340	2.960	3.68	A
	2.5+2.5+4.2	2.34	2.34	3.93	2.45	8.60	10.46	0.510	2.340	2.960	3.68	A
	2.5+2.5+5.0	2.15	2.15	4.30	2.85	8.60	10.64	0.620	2.290	3.020	3.76	A
	2.5+2.5+6.0	1.95	1.95	4.70	3.06	8.60	10.65	0.620	2.080	2.640	4.13	A
	2.5+3.5+3.5	2.26	3.17	3.17	2.73	8.60	10.58	0.560	2.310	2.960	3.72	A
	2.5+3.5+4.2	2.11	2.95	3.54	2.74	8.60	10.59	0.560	2.310	2.950	3.72	A
	2.5+3.5+5.0	1.95	2.74	3.91	3.13	8.60	10.65	0.640	2.290	2.980	3.76	A
	2.5+4.2+4.2	1.97	3.31	3.31	2.74	8.60	10.59	0.560	2.310	2.950	3.72	A
	3.5+3.5+3.5	2.86	2.86	2.86	2.92	8.58	10.63	0.610	2.290	3.030	3.75	A

COOLING															
OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)	
		A ROOM	B ROOM	C ROOM	D ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.				
4MXS68F	2.0	2.00	---	---	---	1.95	2.00	2.63	0.440	0.470	0.620	4.26	A	235	
	2.5	2.50	---	---	---	1.95	2.50	3.37	0.460	0.590	0.850	4.24	A	295	
	3.5	3.50	---	---	---	1.95	3.50	4.76	0.470	0.910	1.470	3.85	A	455	
	4.2	4.20	---	---	---	1.95	4.20	5.02	0.470	1.210	1.620	3.47	A	605	
	5.0	5.00	---	---	---	1.96	5.00	5.91	0.450	1.710	2.200	2.92	C	855	
	6.0	6.00	---	---	---	1.96	6.00	6.38	0.440	2.050	2.320	2.93	C	1,025	
	2.0+2.0	2.00	2.00	---	---	1.97	4.00	5.02	0.430	1.000	1.450	4.00	A	500	
	2.0+2.5	2.00	2.50	---	---	1.97	4.50	5.33	0.430	1.200	1.610	3.75	A	600	
	2.0+3.5	2.00	3.50	---	---	1.97	5.50	6.18	0.420	1.660	2.150	3.31	A	830	
	2.0+4.2	2.00	4.20	---	---	1.97	6.20	6.38	0.420	2.090	2.300	2.97	C	1,045	
	2.0+5.0	1.94	4.86	---	---	1.97	6.80	7.12	0.410	2.410	2.650	2.82	C	1,205	
	2.0+6.0	1.70	5.10	---	---	1.98	6.80	7.56	0.400	2.210	2.750	3.08	B	1,105	
	2.5+2.5	2.50	2.50	---	---	1.97	5.00	5.98	0.450	1.460	2.000	3.42	A	730	
	2.5+3.5	2.50	3.50	---	---	1.97	6.00	6.44	0.430	2.060	2.370	2.91	C	1,030	
	2.5+4.2	2.50	4.20	---	---	1.97	6.70	6.81	0.430	2.540	2.670	2.64	D	1,270	
	2.5+5.0	2.27	4.53	---	---	1.97	6.80	7.23	0.400	2.410	2.750	2.82	C	1,205	
	2.5+6.0	2.00	4.80	---	---	1.98	6.80	7.56	0.380	2.210	2.750	3.08	B	1,105	
	3.5+3.5	3.40	3.40	---	---	1.97	6.80	6.99	0.410	2.510	2.660	2.71	D	1,255	
	3.5+4.2	3.09	3.71	---	---	1.97	6.80	7.10	0.410	2.510	2.760	2.71	D	1,255	
	3.5+5.0	2.80	4.00	---	---	1.97	6.80	7.61	0.380	2.410	3.120	2.82	C	1,205	
	3.5+6.0	2.51	4.29	---	---	2.28	6.80	7.91	0.430	2.210	3.060	3.08	B	1,105	
	4.2+4.2	3.40	3.40	---	---	1.97	6.80	700	0.410	2.510	2.660	2.71	D	1,255	
	4.2+5.0	3.10	3.70	---	---	1.97	6.80	762	0.380	2.410	3.120	2.82	C	1,205	
	4.2+6.0	2.80	4.00	---	---	2.28	6.80	792	0.430	2.210	3.060	3.06	B	1,105	
	5.0+5.0	3.40	3.40	---	---	2.36	6.80	8.06	0.470	2.310	3.350	2.94	C	1,155	
	5.0+6.0	3.09	3.71	---	---	2.49	6.80	8.28	0.480	2.120	3.280	3.21	A	1,060	
	2.0+2.0+2.0	2.00	2.00	2.00	---	1.98	6.00	6.51	0.420	1.640	1.890	3.66	A	820	
	2.0+2.0+2.5	2.00	2.00	2.50	---	1.98	6.50	6.89	0.420	1.890	2.120	3.44	A	945	
	2.0+2.0+3.5	1.81	1.81	3.18	---	1.98	6.80	725	0.410	2.070	2.350	3.29	A	1,035	
	2.0+2.0+4.2	1.66	1.66	3.48	---	1.98	6.80	746	0.410	2.070	2.500	3.29	A	1,035	
	2.0+2.0+5.0	1.51	1.51	3.78	---	1.98	6.80	785	0.390	2.020	2.690	3.37	A	1,010	
	2.0+2.0+6.0	1.36	1.36	4.08	---	2.33	6.80	811	0.440	1.830	2.640	3.72	A	915	
	2.0+2.5+2.5	1.94	2.43	2.43	---	1.98	6.80	710	0.410	2.070	2.260	3.29	A	1,035	
	2.0+2.5+3.5	1.70	2.13	2.97	---	1.98	6.80	759	0.390	2.070	2.590	3.29	A	1,035	
	2.0+2.5+4.2	1.56	1.95	3.29	---	1.98	6.80	778	0.390	2.070	2.750	3.29	A	1,035	
	2.0+2.5+5.0	1.43	1.79	3.58	---	1.98	6.80	792	0.390	2.020	2.740	3.37	A	1,010	
	2.0+2.5+6.0	1.30	1.62	3.88	---	2.33	6.80	838	0.450	1.830	2.840	3.72	A	915	
	2.0+3.5+3.5	1.52	2.64	2.64	---	1.98	6.80	791	0.400	2.070	2.850	3.29	A	1,035	
	2.0+3.5+4.2	1.40	2.45	2.95	---	1.98	6.80	8.09	0.400	2.070	3.010	3.29	A	1,035	
	2.0+3.5+5.0	1.30	2.27	3.23	---	2.30	6.80	8.41	0.440	2.020	3.170	3.37	A	1,010	
	2.0+4.2+4.2	1.30	2.75	2.75	---	1.98	6.80	8.21	0.400	2.070	3.110	3.29	A	1,035	
	2.5+2.5+2.5	2.26	2.26	2.26	---	1.98	6.78	738	0.410	2.070	2.450	3.28	A	1,035	
	2.5+2.5+3.5	2.00	2.00	2.80	---	1.98	6.80	778	0.390	2.070	2.750	3.29	A	1,035	
	2.5+2.5+4.2	1.85	1.85	3.10	---	1.98	6.80	796	0.390	2.070	2.900	3.29	A	1,035	
	2.5+2.5+5.0	1.70	1.70	3.40	---	2.30	6.80	8.28	0.440	2.020	3.060	3.37	A	1,010	
	2.5+2.5+6.0	1.55	1.55	3.70	---	2.44	6.80	857	0.440	1.830	3.000	3.72	A	915	
	2.5+3.5+3.5	1.78	2.51	2.51	---	2.29	6.80	814	0.440	2.070	3.060	3.29	A	1,035	
	2.5+3.5+4.2	1.67	2.33	2.80	---	2.29	6.80	826	0.440	2.070	3.170	3.29	A	1,035	
	2.5+3.5+5.0	1.55	2.16	3.09	---	2.51	6.80	857	0.460	1.980	3.330	3.43	A	990	
	2.5+4.2+4.2	1.56	2.62	2.62	---	2.29	6.80	832	0.440	2.070	3.220	3.29	A	1,035	
	3.5+3.5+3.5	2.26	2.26	2.26	---	2.40	6.78	842	0.430	2.070	3.330	3.28	A	1,035	
	20+20+20+20	1.70	1.70	1.70	1.70	1.99	6.80	763	0.410	1.750	2.190	3.89	A	875	
	20+20+20+25	1.60	1.60	1.60	2.00	1.99	6.80	779	0.390	1.730	2.290	3.93	A	865	
	20+20+20+35	1.43	1.43	1.43	2.51	1.99	6.80	8.17	0.400	1.710	2.530	3.98	A	855	
	20+20+20+42	1.33	1.33	1.33	2.81	1.99	6.80	8.32	0.400	1.710	2.630	3.98	A	855	
	20+20+20+50	1.24	1.24	1.24	3.08	2.47	6.80	8.74	0.460	1.670	2.930	4.07	A	835	
	20+20+25+25	1.51	1.51	1.89	1.89	1.99	6.80	794	0.400	1.750	2.380	3.89	A	875	
	20+20+25+35	1.36	1.36	1.70	2.38	2.34	6.80	832	0.450	1.730	2.630	3.93	A	865	
	20+20+25+42	1.27	1.27	1.59	2.67	2.34	6.80	847	0.450	1.730	2.740	3.93	A	865	
	20+20+35+35	1.24	1.24	2.16	2.16	2.46	6.80	8.61	0.450	1.710	2.840	3.98	A	855	
	20+25+25+25	1.43	1.79	1.79	1.79	1.99	6.80	817	0.400	1.750	2.530	3.89	A	875	
	20+25+25+35	1.30	1.62	1.62	2.26	2.34	6.80	846	0.450	1.730	2.740	3.93	A	865	
	25+25+25+25	1.70	1.70	1.70	1.70	2.34	6.80	839	0.460	1.710	2.680	3.98	A	855	
	25+25+25+35	1.55	1.55	1.55	2.15	2.46	6.80	873	0.460	1.700	2.950	4.00	A	850	

HEATING														
OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL	
		A ROOM	B ROOM	C ROOM	D ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
4MXS68F	2.0	2.72	---	---	---	1.51	2.72	3.93	0.440	0.740	1.270	3.68	A	
	2.5	3.40	---	---	---	1.47	3.40	4.13	0.430	1.030	1.370	3.30	C	
	3.5	4.30	---	---	---	1.48	4.30	4.52	0.410	1.420	1.610	3.03	D	
	4.2	4.50	---	---	---	1.48	4.50	4.71	0.410	1.510	1.720	2.98	D	
	5.0	5.60	---	---	---	1.65	5.60	5.76	0.390	2.130	2.260	2.63	E	
	6.0	7.90	---	---	---	1.92	7.90	8.57	0.410	2.650	2.920	2.98	D	
	2.0+2.0	3.25	3.25	---	---	1.62	6.50	7.64	0.380	1.870	2.250	3.48	B	
	2.0+2.5	3.04	3.81	---	---	1.62	6.85	7.81	0.380	2.050	2.330	3.34	C	
	2.0+3.5	2.71	4.74	---	---	1.76	7.45	8.34	0.390	2.340	2.640	3.18	D	
	2.0+4.2	2.58	5.42	---	---	1.76	8.00	8.68	0.390	2.640	2.890	3.03	D	
	2.0+5.0	2.46	6.14	---	---	2.14	8.60	10.15	0.480	2.800	3.260	3.07	D	
	2.0+6.0	2.15	6.45	---	---	2.41	8.60	10.34	0.510	2.430	2.980	3.54	B	
	2.5+2.5	3.60	3.60	---	---	1.62	7.20	8.16	0.380	2.240	2.560	3.21	C	
	2.5+3.5	3.29	4.61	---	---	1.85	7.90	8.68	0.400	2.580	2.890	3.06	D	
	2.5+4.2	3.10	5.20	---	---	1.85	8.30	8.93	0.400	2.800	3.070	2.96	D	
	2.5+5.0	2.87	5.73	---	---	2.23	8.60	10.27	0.490	2.800	3.360	3.07	D	
	2.5+6.0	2.53	6.07	---	---	2.50	8.60	10.46	0.530	2.430	3.010	3.54	B	
	3.5+3.5	4.30	4.30	---	---	2.13	8.60	9.02	0.450	2.930	3.110	2.94	D	
	3.5+4.2	3.91	4.69	---	---	2.13	8.60	9.11	0.450	2.920	3.160	2.95	D	
	3.5+5.0	3.54	5.06	---	---	2.51	8.60	10.48	0.540	2.790	3.400	3.08	D	
	3.5+6.0	3.17	5.43	---	---	2.69	8.60	10.59	0.550	2.420	3.000	3.55	B	
	4.2+4.2	4.30	4.30	---	---	2.13	8.60	9.19	0.450	2.920	3.200	2.95	D	
	4.2+5.0	3.93	4.67	---	---	2.51	8.60	10.49	0.540	2.790	3.470	3.08	D	
	4.2+6.0	3.54	5.06	---	---	2.69	8.60	10.60	0.540	2.420	3.030	3.55	B	
	5.0+5.0	4.30	4.30	---	---	2.88	8.60	10.67	0.630	2.700	3.380	3.19	D	
	5.0+6.0	3.91	4.69	---	---	3.08	8.60	10.66	0.640	2.390	2.960	3.60	B	
	2.0+2.0+2.0	2.63	2.63	2.63	---	1.97	7.89	10.04	0.440	2.050	2.700	3.85	A	
	2.0+2.0+2.5	2.54	2.54	3.17	---	2.06	8.25	10.12	0.450	2.180	2.740	3.78	A	
	2.0+2.0+3.5	2.29	2.29	4.02	---	2.26	8.60	10.22	0.470	2.340	2.880	3.68	A	
	2.0+2.0+4.2	2.10	2.10	4.40	---	2.26	8.60	10.22	0.470	2.340	2.880	3.68	A	
	2.0+2.0+5.0	1.91	1.91	4.78	---	2.66	8.60	10.40	0.580	2.340	2.960	3.68	A	
	2.0+2.0+6.0	1.72	1.72	5.16	---	2.87	8.60	10.53	0.580	2.120	2.670	4.06	A	
	2.0+2.5+2.5	2.46	3.07	3.07	---	2.16	8.60	10.13	0.460	2.350	2.840	3.66	A	
	2.0+2.5+3.5	2.15	2.69	3.76	---	2.35	8.60	10.22	0.490	2.340	2.880	3.68	A	
	2.0+2.5+4.2	1.98	2.47	4.15	---	2.36	8.60	10.23	0.490	2.340	2.870	3.68	A	
	2.0+2.5+5.0	1.81	2.26	4.53	---	2.75	8.60	10.63	0.600	2.320	2.990	3.71	A	
	2.0+2.5+6.0	1.64	2.05	4.91	---	2.96	8.60	10.64	0.600	2.100	2.640	4.10	A	
	2.0+3.5+3.5	1.92	3.34	3.34	---	2.64	8.60	10.35	0.550	2.310	2.930	3.72	A	
	2.0+3.5+4.2	1.77	3.10	3.72	---	2.64	8.60	10.35	0.550	2.310	2.920	3.72	A	
	2.0+3.5+5.0	1.64	2.87	4.09	---	2.94	8.60	10.68	0.620	2.290	3.060	3.76	A	
	2.0+4.2+4.2	1.65	3.47	3.47	---	2.64	8.60	10.36	0.550	2.310	2.920	3.72	A	
	2.5+2.5+2.5	2.86	2.86	2.86	---	2.26	8.58	10.24	0.480	2.350	2.870	3.65	A	
	2.5+2.5+3.5	2.53	2.53	3.54	---	2.45	8.60	10.45	0.510	2.340	2.960	3.68	A	
	2.5+2.5+4.2	2.34	2.34	3.93	---	2.45	8.60	10.46	0.510	2.340	2.960	3.68	A	
	2.5+2.5+5.0	2.15	2.15	4.30	---	2.85	8.60	10.64	0.620	2.290	3.020	3.76	A	
	2.5+2.5+6.0	1.95	1.95	4.70	---	3.06	8.60	10.65	0.620	2.080	2.640	4.13	A	
	2.5+3.5+3.5	2.26	3.17	3.17	---	2.73	8.60	10.58	0.560	2.310	2.960	3.72	A	
	2.5+3.5+4.2	2.11	2.95	3.54	---	2.74	8.60	10.59	0.560	2.310	2.950	3.72	A	
	2.5+3.5+5.0	1.95	2.74	3.91	---	3.13	8.60	10.65	0.640	2.290	2.980	3.76	A	
	2.5+4.2+4.2	1.97	3.31	3.31	---	2.74	8.60	10.59	0.560	2.310	2.950	3.72	A	
	3.5+3.5+3.5	2.86	2.86	2.86	---	2.92	8.58	10.63	0.610	2.290	3.030	3.75	A	
	20+20+20+2.0	2.15	2.15	2.15	2.15	2.42	8.60	10.39	0.520	1.910	2.610	4.50	A	
	20+20+20+2.5	2.02	2.02	2.02	2.54	2.52	8.60	10.48	0.530	1.910	2.570	4.50	A	
	20+20+20+3.5	1.81	1.81	1.81	3.17	2.72	8.60	10.58	0.570	1.900	2.630	4.53	A	
	20+20+20+4.2	1.69	1.69	1.69	3.54	2.73	8.60	10.59	0.560	1.900	2.630	4.53	A	
	20+20+20+5.0	1.56	1.56	1.56	3.92	3.04	8.60	10.65	0.630	1.860	2.540	4.62	A	
	20+20+25+2.5	1.91	1.91	2.39	2.39	2.62	8.60	10.49	0.550	1.910	2.570	4.50	A	
	20+20+25+3.5	1.72	1.72	2.15	3.01	2.92	8.60	10.59	0.600	1.900	2.630	4.53	A	
	20+20+25+4.2	1.61	1.61	2.01	3.38	2.92	8.60	10.59	0.600	1.900	2.630	4.53	A	
	20+20+35+3.5	1.56	1.56	2.74	2.74	3.12	8.60	10.69	0.650	1.900	2.660	4.53	A	
	20+25+25+2.5	1.82	2.26	2.26	2.26	2.72	8.60	10.49	0.570	1.910	2.570	4.50	A	
	20+25+25+3.5	1.64	2.05	2.05	2.86	3.02	8.60	10.68	0.630	1.900	2.670	4.53	A	
	25+25+25+2.5	2.15	2.15	2.15	2.15	2.82	8.60	10.67	0.570	1.910	2.590	4.50	A	
	25+25+25+3.5	1.95	1.95	1.95	2.75	3.12	8.60	10.68	0.640	1.810	2.580	4.75	A	

COOLING														
OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
4MXS80E	2.0	2.00	---	---	---	1.80	2.00	2.99	0.45	0.61	1.10	3.28	A	305
	2.5	2.50	---	---	---	1.87	2.50	3.52	0.49	0.78	1.33	3.21	A	390
	3.5	3.50	---	---	---	1.91	3.50	4.80	0.49	1.19	1.82	2.94	C	595
	4.2	4.20	---	---	---	1.99	4.20	5.26	0.53	1.52	1.92	2.76	D	760
	5.0	5.00	---	---	---	2.07	5.00	5.70	0.49	1.82	2.08	2.75	D	910
	6.0	6.00	---	---	---	2.17	6.00	6.60	0.50	1.99	2.38	3.02	B	995
	7.1	7.10	---	---	---	2.28	7.10	7.37	0.50	2.69	2.88	2.64	D	1,345
	2.0+2.0	2.00	2.00	---	---	1.97	4.00	5.30	0.50	1.23	1.67	3.25	A	615
	2.0+2.5	2.00	2.50	---	---	2.02	4.50	5.73	0.50	1.38	1.77	3.26	A	690
	2.0+3.5	2.00	3.50	---	---	2.12	5.50	6.31	0.50	1.77	2.44	3.11	B	885
	2.0+4.2	2.00	4.20	---	---	2.19	6.20	7.13	0.50	2.21	2.56	2.81	C	1,105
	2.0+5.0	2.00	5.00	---	---	2.27	7.00	7.30	0.51	2.51	2.76	2.79	D	1,255
	2.0+6.0	1.83	5.48	---	---	2.41	7.31	7.90	0.55	2.48	2.87	2.95	C	1,240
	2.0+7.1	1.66	5.90	---	---	2.56	7.56	8.45	0.59	2.67	3.29	2.83	C	1,335
	2.5+2.5	2.50	2.50	---	---	2.07	5.00	6.12	0.46	1.47	2.44	3.40	A	735
	2.5+3.5	2.50	3.50	---	---	2.17	6.00	6.60	0.50	1.99	2.38	3.02	B	995
	2.5+4.2	2.50	4.20	---	---	2.24	6.70	7.11	0.50	2.44	2.63	2.75	D	1,220
	2.5+5.0	2.40	4.79	---	---	2.34	7.19	7.59	0.54	2.64	2.96	2.72	D	1,320
	2.5+6.0	2.18	5.24	---	---	2.48	7.42	8.16	0.59	2.60	3.07	2.85	C	1,300
	2.5+7.1	2.00	5.68	---	---	2.63	7.68	8.66	0.59	2.74	3.43	2.80	D	1,370
	3.5+3.5	3.50	3.50	---	---	2.27	7.00	7.30	0.50	2.63	2.88	2.66	D	1,315
	3.5+4.2	3.29	3.95	---	---	2.37	7.24	7.73	0.54	2.82	3.08	2.57	E	1,410
	3.5+5.0	3.06	4.36	---	---	2.48	7.42	8.16	0.58	2.83	3.37	2.62	D	1,415
	3.5+6.0	2.82	4.83	---	---	2.61	7.65	8.62	0.59	2.74	4.11	2.79	D	1,370
	3.5+7.1	2.61	5.30	---	---	2.77	7.91	8.31	0.63	2.87	3.15	2.76	D	1,435
	4.2+4.2	3.70	3.70	---	---	2.46	7.40	8.11	0.58	2.88	3.42	2.57	E	1,440
	4.2+5.0	3.46	4.12	---	---	2.57	7.58	8.48	0.58	2.96	3.59	2.56	E	1,480
	4.2+6.0	3.22	4.60	---	---	2.71	7.82	8.89	0.63	2.80	3.66	2.79	D	1,400
	4.2+7.1	2.97	5.03	---	---	2.86	8.00	8.98	0.67	2.94	3.67	2.72	D	1,470
	5.0+5.0	3.88	3.88	---	---	2.68	7.76	8.66	0.62	2.98	3.62	2.60	E	1,490
	5.0+6.0	3.64	4.36	---	---	2.82	8.00	9.14	0.67	2.88	3.69	2.78	D	1,440
	5.0+7.1	3.31	4.69	---	---	2.97	8.00	9.35	0.67	2.82	3.85	2.84	C	1,410
	6.0+6.0	4.00	4.00	---	---	2.96	8.00	9.39	0.67	2.65	3.60	3.02	B	1,325
	6.0+7.1	3.66	4.34	---	---	3.11	8.00	9.55	0.71	2.58	3.76	3.10	B	1,290
	7.1+7.1	4.00	4.00	---	---	3.26	8.00	9.60	0.75	2.51	3.77	3.19	B	1,255
	2.0+2.0+2.0	2.00	2.00	2.00	---	2.17	6.00	6.63	0.52	1.73	2.12	3.47	A	865
	2.0+2.0+2.5	2.00	2.00	2.50	---	2.22	6.50	6.95	0.52	2.00	2.29	3.25	A	1,000
	2.0+2.0+3.5	1.92	1.92	3.35	---	2.34	7.19	7.61	0.55	2.42	2.67	2.97	C	1,210
	2.0+2.0+4.2	1.80	1.80	3.75	---	2.44	7.35	8.01	0.55	2.54	2.87	2.89	C	1,270
	2.0+2.0+5.0	1.68	1.68	4.18	---	2.55	7.54	8.40	0.59	2.55	3.17	2.96	C	1,275
	2.0+2.0+6.0	1.55	1.55	4.67	---	2.68	7.77	8.82	0.60	2.45	3.14	3.17	B	1,225
	2.0+2.0+7.1	1.44	1.44	5.12	---	2.83	8.00	9.18	0.64	2.58	3.45	3.10	B	1,290
	2.0+2.5+2.5	2.00	2.50	2.50	---	2.27	7.00	7.30	0.52	2.29	2.48	3.06	B	1,145
	2.0+2.5+3.5	1.83	2.28	3.20	---	2.41	7.31	7.90	0.55	2.48	2.87	2.95	C	1,240
	2.0+2.5+4.2	1.72	2.15	3.60	---	2.50	7.47	8.26	0.59	2.61	3.01	2.86	C	1,305
	2.0+2.5+5.0	1.61	2.01	4.03	---	2.61	7.65	8.62	0.59	2.62	3.31	2.92	C	1,310
	2.0+2.5+6.0	1.50	1.88	4.50	---	2.75	7.88	8.99	0.64	2.51	3.29	3.14	B	1,255
	2.0+2.5+7.1	1.38	1.72	4.90	---	2.90	8.00	9.30	0.67	2.58	3.53	3.10	B	1,290
	2.0+3.5+3.5	1.68	2.93	2.93	---	2.55	7.54	8.40	0.59	2.67	3.22	2.82	C	1,335

COOLING															
OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)	
		A ROOM	B ROOM	C ROOM	D ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.				
4MXS80E	2.0+3.5+4.2	1.59	2.78	3.33	---	2.64	7.70	8.70	0.63	2.74	3.37	2.81	C	1,370	
	2.0+3.5+5.0	1.50	2.63	3.75	---	2.75	7.88	8.99	0.63	2.75	3.61	2.87	C	1,375	
	2.0+3.5+6.0	1.39	2.43	4.18	---	2.89	8.00	9.28	0.67	2.58	3.52	3.10	B	1,290	
	2.0+3.5+7.1	1.27	2.22	4.51	---	3.04	8.00	9.10	0.67	2.51	3.30	3.19	B	1,255	
	2.0+4.2+4.2	1.52	3.17	3.17	---	2.74	7.86	8.99	0.63	2.74	3.66	2.87	C	1,370	
	2.0+4.2+5.0	1.43	3.00	3.57	---	2.85	8.00	9.23	0.67	2.75	3.77	2.91	C	1,375	
	2.0+4.2+6.0	1.32	2.75	3.93	---	2.98	8.00	9.45	0.67	2.51	3.60	3.19	B	1,255	
	2.0+4.2+7.1	1.20	2.53	4.27	---	3.14	8.00	9.60	0.71	2.52	3.69	3.17	B	1,260	
	2.0+5.0+5.0	1.34	3.33	3.33	---	2.96	8.00	9.39	0.67	2.76	3.80	2.90	C	1,380	
	2.0+5.0+6.0	1.23	3.08	3.69	---	3.09	8.00	9.54	0.71	2.46	3.63	3.25	A	1,230	
	2.0+5.0+7.1	1.13	2.84	4.03	---	3.25	8.00	9.60	0.71	2.39	3.63	3.35	A	1,195	
	2.0+6.0+6.0	1.14	3.43	3.43	---	3.23	8.00	9.60	0.72	2.28	3.37	3.51	A	1,140	
	2.5+2.5+2.5	2.40	2.40	2.40	---	2.34	7.20	7.61	0.55	2.42	2.67	2.98	C	1,210	
	2.5+2.5+3.5	2.18	2.18	3.06	---	2.48	7.42	8.16	0.59	2.54	3.08	2.92	C	1,270	
	2.5+2.5+4.2	2.06	2.06	3.46	---	2.57	7.58	8.49	0.59	2.67	3.29	2.84	C	1,335	
	2.5+2.5+5.0	1.94	1.94	3.89	---	2.68	7.77	8.82	0.63	2.68	3.46	2.90	C	1,340	
	2.5+2.5+6.0	1.82	1.82	4.36	---	2.82	8.00	9.15	0.64	2.58	3.45	3.10	B	1,290	
	2.5+2.5+7.1	1.65	1.65	4.70	---	2.97	8.00	9.41	0.67	2.51	3.61	3.19	B	1,255	
	2.5+3.5+3.5	2.01	2.82	2.82	---	2.61	7.65	8.34	0.59	2.74	3.01	2.79	D	1,370	
	2.5+3.5+4.2	1.92	2.68	3.22	---	2.71	7.82	8.89	0.63	2.80	3.44	2.79	D	1,400	
	2.5+3.5+5.0	1.81	2.55	3.64	---	2.82	8.00	9.15	0.67	2.82	3.69	2.84	C	1,410	
	2.5+3.5+6.0	1.67	2.33	4.00	---	2.96	8.00	9.39	0.67	2.58	3.60	3.10	B	1,290	
	2.5+3.5+7.1	1.52	2.14	4.34	---	3.11	8.00	9.10	0.71	2.51	3.30	3.19	B	1,255	
	2.5+4.2+4.2	1.84	3.07	3.07	---	2.81	7.98	9.15	0.67	2.87	3.82	2.78	D	1,435	
	2.5+4.2+5.0	1.71	2.87	3.42	---	2.92	8.00	9.35	0.67	2.82	3.85	2.84	C	1,410	
	2.5+4.2+6.0	1.57	2.65	3.78	---	3.05	8.00	9.53	0.67	2.58	3.68	3.10	B	1,290	
	2.5+4.2+7.1	1.45	2.43	4.12	---	3.20	8.00	9.63	0.71	2.52	3.77	3.17	B	1,260	
	2.5+5.0+5.0	1.60	3.20	3.20	---	3.03	8.00	9.47	0.71	2.76	3.88	2.90	C	1,380	
	2.5+5.0+6.0	1.48	2.96	3.56	---	3.16	8.00	9.58	0.71	2.46	3.63	3.25	A	1,230	
	2.5+6.0+6.0	1.38	3.31	3.31	---	3.30	8.00	9.60	0.72	2.22	3.37	3.60	A	1,110	
	3.5+3.5+3.5	2.63	2.63	2.63	---	2.75	7.89	8.67	0.63	2.87	3.15	2.75	D	1,435	
	3.5+3.5+4.2	2.50	2.50	3.01	---	2.85	8.01	9.29	0.67	2.94	3.66	2.72	D	1,470	
	3.5+3.5+5.0	2.33	2.33	3.34	---	2.96	8.00	9.35	0.67	2.82	3.85	2.84	C	1,410	
	3.5+3.5+6.0	2.15	2.15	3.70	---	3.09	8.00	9.11	0.71	2.58	3.37	3.10	B	1,290	
	3.5+3.5+7.1	1.99	1.99	4.02	---	3.25	8.00	9.60	0.75	2.52	3.77	3.17	B	1,260	
	3.5+4.2+4.2	2.36	2.82	2.82	---	2.94	8.00	9.18	0.67	2.87	3.82	2.79	D	1,435	
	3.5+4.2+5.0	2.21	2.65	3.14	---	3.05	8.00	9.36	0.71	2.75	3.85	2.91	C	1,375	
	3.5+4.2+6.0	2.06	2.45	3.49	---	3.19	8.00	9.59	0.71	2.51	3.77	3.19	B	1,255	
	3.5+5.0+5.0	2.08	2.96	2.96	---	3.16	8.00	9.55	0.71	2.76	3.88	2.90	C	1,380	
	3.5+5.0+6.0	1.93	2.76	3.31	---	3.30	8.00	9.60	0.75	2.46	3.63	3.25	A	1,230	
	4.2+4.2+4.2	2.67	2.67	2.67	---	3.04	8.00	9.19	0.71	2.87	3.82	2.79	D	1,435	
	4.2+4.2+5.0	2.51	2.51	2.98	---	3.15	8.00	9.37	0.71	2.75	3.85	2.91	C	1,375	
	4.2+4.2+6.0	2.33	2.33	3.34	---	3.29	8.00	9.60	0.75	2.51	3.77	3.19	B	1,255	
	4.2+5.0+5.0	2.36	2.82	2.82	---	3.26	8.00	9.56	0.75	2.70	3.88	2.96	C	1,350	
	20+20+20+20	1.83	1.83	1.83	1.83	2.41	7.32	7.90	0.56	2.07	2.38	3.54	A	1,035	
	20+20+20+25	1.75	1.75	1.75	2.17	2.48	7.42	8.16	0.56	2.13	2.51	3.48	A	1,065	
	20+20+20+35	1.61	1.61	1.61	2.82	2.61	7.65	8.62	0.60	2.26	2.86	3.38	A	1,130	
	20+20+20+42	1.53	1.53	1.53	3.23	2.71	7.82	8.89	0.64	2.32	3.00	3.37	A	1,160	
	20+20+20+50	1.45	1.45	1.45	3.65	2.82	8.00	9.15	0.64	2.52	3.32	3.17	B	1,260	

COOLING															
OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)	
		A ROOM	B ROOM	C ROOM	D ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.				
4MXS80E	20+20+20+60	1.33	1.33	1.33	4.01	2.96	8.00	9.39	0.68	2.28	3.21	3.51	A	1,140	
	20+20+20+71	1.22	1.22	1.22	4.34	3.11	8.00	9.55	0.68	2.22	3.29	3.60	A	1,110	
	20+20+25+25	1.68	1.68	2.09	2.09	2.55	7.54	8.40	0.60	2.20	2.72	3.43	A	1,100	
	20+20+25+35	1.55	1.55	1.94	2.73	2.68	7.77	8.82	0.60	2.45	3.14	3.17	B	1,225	
	20+20+25+42	1.48	1.48	1.85	3.12	2.78	7.93	9.06	0.64	2.58	3.30	3.07	B	1,290	
	20+20+25+50	1.39	1.39	1.74	3.48	2.89	8.00	9.28	0.64	2.52	3.39	3.17	B	1,260	
	20+20+25+60	1.28	1.28	1.60	3.84	3.03	8.00	9.47	0.68	2.28	3.21	3.51	A	1,140	
	20+20+25+71	1.18	1.18	1.47	4.17	3.18	8.00	9.59	0.72	2.22	3.29	3.60	A	1,110	
	20+20+35+35	1.45	1.45	2.55	2.55	2.82	8.00	8.96	0.64	2.58	3.22	3.10	B	1,290	
	20+20+35+42	1.37	1.37	2.39	2.87	2.92	8.00	9.32	0.67	2.58	3.53	3.10	B	1,290	
	20+20+35+50	1.28	1.28	2.24	3.20	3.03	8.00	9.47	0.68	2.52	3.55	3.17	B	1,260	
	20+20+35+60	1.19	1.19	2.07	3.55	3.16	8.00	9.58	0.72	2.28	3.29	3.51	A	1,140	
	20+20+42+42	1.29	1.29	2.71	2.71	3.01	8.00	9.46	0.67	2.58	3.61	3.10	B	1,290	
	20+20+42+50	1.21	1.21	2.55	3.03	3.12	8.00	9.56	0.71	2.52	3.55	3.17	B	1,260	
	20+20+42+60	1.13	1.13	2.37	3.37	3.26	8.00	9.60	0.72	2.28	3.29	3.51	A	1,140	
	20+20+50+50	1.14	1.14	2.86	2.86	3.23	8.00	9.60	0.71	2.44	3.50	3.28	A	1,220	
	20+25+25+25	1.62	2.01	2.01	2.61	7.65	8.62	0.60	2.26	2.85	3.38	A	1,130		
	20+25+25+35	1.50	1.88	1.88	2.62	2.75	7.88	8.99	0.64	2.51	3.29	3.14	B	1,255	
	20+25+25+42	1.43	1.79	1.79	2.99	2.85	8.00	9.20	0.64	2.58	3.45	3.10	B	1,290	
	20+25+25+50	1.33	1.67	1.67	3.33	2.96	8.00	9.39	0.68	2.52	3.47	3.17	B	1,260	
	20+25+25+60	1.23	1.54	1.54	3.69	3.09	8.00	9.54	0.68	2.25	3.29	3.56	A	1,125	
	20+25+25+71	1.13	1.42	1.42	4.03	3.25	8.00	9.60	0.72	2.28	3.29	3.51	A	1,140	
	20+25+35+35	1.40	1.74	2.43	2.43	2.89	8.00	9.14	0.67	2.58	3.37	3.10	B	1,290	
	20+25+35+42	1.31	1.64	2.30	2.75	2.98	8.00	9.47	0.67	2.58	3.61	3.10	B	1,290	
	20+25+35+50	1.23	1.54	2.15	3.08	3.09	8.00	9.54	0.71	2.52	3.55	3.17	B	1,260	
	20+25+35+60	1.14	1.43	2.00	3.43	3.23	8.00	9.60	0.72	2.28	3.29	3.51	A	1,140	
	20+25+42+42	1.25	1.55	2.60	2.60	3.08	8.00	9.53	0.71	2.58	3.69	3.10	B	1,290	
	20+25+42+50	1.17	1.46	2.45	2.92	3.19	8.00	9.59	0.71	2.52	3.63	3.17	B	1,260	
	20+25+50+50	1.10	1.38	2.76	2.76	3.30	8.00	9.60	0.71	2.40	3.50	3.33	A	1,200	
	20+35+35+35	1.28	2.24	2.24	2.24	3.03	8.00	9.23	0.67	2.58	3.30	3.10	B	1,290	
	20+35+35+42	1.21	2.12	2.12	2.55	3.12	8.00	9.56	0.71	2.58	3.69	3.10	B	1,290	
	20+35+35+50	1.14	2.00	2.00	2.86	3.23	8.00	9.60	0.71	2.52	3.63	3.17	B	1,260	
	20+35+42+42	1.15	2.01	2.42	2.42	3.22	8.00	9.60	0.71	2.58	3.77	3.10	B	1,290	
	25+25+25+25	1.94	1.94	1.94	1.94	2.68	7.76	8.82	0.60	2.45	3.14	3.17	B	1,225	
	25+25+25+35	1.82	1.82	1.82	2.54	2.82	8.00	8.98	0.64	2.58	3.22	3.10	B	1,290	
	25+25+25+42	1.71	1.71	1.71	2.87	2.92	8.00	9.32	0.67	2.58	3.53	3.10	B	1,290	
	25+25+25+50	1.60	1.60	1.60	3.20	3.03	8.00	9.47	0.68	2.52	3.55	3.17	B	1,260	
	25+25+25+60	1.48	1.48	1.48	3.56	3.16	8.00	9.58	0.72	2.28	3.29	3.51	A	1,140	
	25+25+35+35	1.67	1.67	2.33	2.33	2.96	8.00	9.10	0.67	2.58	3.37	3.10	B	1,290	
	25+25+35+42	1.57	1.57	2.21	2.65	3.05	8.00	9.50	0.67	2.58	3.69	3.10	B	1,290	
	25+25+35+50	1.48	1.48	2.07	2.97	3.16	8.00	9.58	0.71	2.52	3.63	3.17	B	1,260	
	25+25+35+60	1.38	1.38	1.93	3.31	3.30	8.00	9.60	0.72	2.28	3.29	3.51	A	1,140	
	25+25+42+42	1.49	1.49	2.51	2.51	3.15	8.00	9.57	0.71	2.58	3.69	3.10	B	1,290	
	25+25+42+50	1.41	1.41	2.37	2.81	3.26	8.00	9.60	0.71	2.52	3.63	3.17	B	1,260	
	25+35+35+35	1.55	2.15	2.15	2.15	3.09	8.00	9.35	0.71	2.58	3.30	3.10	B	1,290	
	25+35+35+42	1.47	2.04	2.04	2.45	3.19	8.00	9.59	0.71	2.58	3.77	3.10	B	1,290	
	25+35+35+50	1.38	1.93	1.93	2.76	3.30	8.00	9.60	0.75	2.52	3.63	3.17	B	1,260	
	25+35+42+42	1.40	1.94	2.33	2.33	3.29	8.00	9.60	0.75	2.58	3.77	3.10	B	1,290	
	35+35+35+35	2.00	2.00	2.00	2.00	3.23	8.00	9.60	0.71	2.58	3.77	3.10	B	1,290	

HEATING													
OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL
		A ROOM	B ROOM	C ROOM	D ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.		
4MXS80E	2.0	2.44	---	---	---	1.31	2.44	4.10	0.31	0.67	1.22	3.64	A
	2.5	3.05	---	---	---	1.36	3.05	4.55	0.33	0.88	1.31	3.47	B
	3.5	4.27	---	---	---	1.48	4.27	5.11	0.34	1.42	1.73	3.01	D
	4.2	5.12	---	---	---	1.68	5.12	5.17	0.37	1.73	1.77	2.96	D
	5.0	6.09	---	---	---	1.90	6.09	7.12	0.44	1.78	2.25	3.42	B
	6.0	7.31	---	---	---	2.19	7.31	8.19	0.55	2.19	2.64	3.34	C
	7.1	8.65	---	---	---	2.50	8.65	9.00	0.59	2.77	2.97	3.12	D
	2.0+2.0	2.44	2.44	---	---	1.62	4.88	6.55	0.34	1.17	1.74	4.17	A
	2.0+2.5	2.44	3.05	---	---	1.76	5.49	6.85	0.37	1.34	1.82	4.10	A
	2.0+3.5	2.44	4.26	---	---	2.05	6.70	7.35	0.43	1.86	2.13	3.60	A
	2.0+4.2	2.44	5.11	---	---	2.24	7.55	7.35	0.47	2.22	2.13	3.40	C
	2.0+5.0	2.44	6.09	---	---	2.47	8.53	8.72	0.55	2.32	2.42	3.68	A
	2.0+6.0	2.32	6.95	---	---	2.74	9.27	9.67	0.57	2.44	2.64	3.80	A
	2.0+7.1	2.11	7.49	---	---	3.04	9.60	10.36	0.61	2.48	2.89	3.87	A
	2.5+2.5	3.04	3.04	---	---	1.90	6.08	7.16	0.41	1.69	2.14	3.60	B
	2.5+3.5	3.05	4.26	---	---	2.19	7.31	8.53	0.55	2.13	2.67	3.43	B
	2.5+4.2	3.04	5.12	---	---	2.39	8.16	8.53	0.57	2.46	2.67	3.32	C
	2.5+5.0	2.98	5.95	---	---	2.61	8.93	9.31	0.57	2.52	2.72	3.54	B
	2.5+6.0	2.82	6.78	---	---	2.88	9.60	10.10	0.59	2.65	2.94	3.62	A
	2.5+7.1	2.50	7.10	---	---	3.17	9.60	10.36	0.63	2.51	2.93	3.82	A
	3.5+3.5	4.26	4.26	---	---	2.47	8.52	9.18	0.59	2.70	3.04	3.16	D
	3.5+4.2	4.11	4.94	---	---	2.66	9.05	9.18	0.61	2.98	3.04	3.04	D
	3.5+5.0	3.95	5.65	---	---	2.88	9.60	9.92	0.62	2.77	2.93	3.47	B
	3.5+6.0	3.54	6.06	---	---	3.15	9.60	10.34	0.61	2.49	2.90	3.86	A
	3.5+7.1	3.17	6.43	---	---	3.45	9.60	10.37	0.67	2.43	2.84	3.95	A
	4.2+4.2	4.78	4.78	---	---	2.85	9.55	9.99	0.63	2.65	2.91	3.60	B
	4.2+5.0	4.38	5.22	---	---	3.07	9.60	10.12	0.64	2.61	2.87	3.68	A
	4.2+6.0	3.95	5.65	---	---	3.34	9.60	10.35	0.65	2.44	2.84	3.93	A
	4.2+7.1	3.57	6.03	---	---	3.63	9.60	10.38	0.70	2.43	2.83	3.95	A
	5.0+5.0	4.80	4.80	---	---	3.28	9.60	10.24	0.67	2.52	2.83	3.81	A
	5.0+6.0	4.36	5.24	---	---	3.55	9.60	10.47	0.66	2.40	2.80	4.00	A
	5.0+7.1	3.97	5.63	---	---	3.85	9.60	10.50	0.70	2.38	2.79	4.03	A
	6.0+6.0	4.80	4.80	---	---	3.82	9.60	10.70	0.67	2.32	2.77	4.14	A
	6.0+7.1	4.40	5.20	---	---	4.12	9.60	10.73	0.71	2.31	2.76	4.16	A
	7.1+7.1	4.80	4.80	---	---	4.42	9.60	10.77	0.78	2.25	2.70	4.27	A
	20+20+20	2.43	2.43	2.43	---	2.19	7.29	8.33	0.48	1.76	2.14	4.14	A
	20+20+25	2.44	3.04	---	---	2.33	7.92	8.93	0.50	1.96	2.32	4.04	A
	20+20+35	2.38	2.38	4.17	---	2.61	8.93	9.68	0.54	2.29	2.63	3.90	A
	20+20+42	2.30	2.30	4.81	---	2.80	9.41	9.69	0.56	2.48	2.63	3.79	A
	20+20+50	2.13	2.13	5.34	---	3.01	9.60	10.48	0.57	2.39	2.80	4.02	A
	20+20+60	1.92	1.92	5.76	---	3.28	9.60	10.71	0.58	2.27	2.72	4.23	A
	20+20+71	1.73	1.73	6.14	---	3.58	9.60	10.74	0.62	2.26	2.71	4.25	A
	20+25+25	2.43	3.05	3.05	---	2.47	8.53	8.93	0.52	2.16	2.30	3.95	A
	20+25+35	2.31	2.90	4.06	---	2.74	9.27	9.68	0.56	2.41	2.61	3.85	A
	20+25+42	2.21	2.76	4.63	---	2.93	9.60	9.69	0.59	2.56	2.61	3.75	A
	20+25+50	2.02	2.53	5.05	---	3.15	9.60	10.48	0.59	2.39	2.80	4.02	A
	20+25+60	1.82	2.29	5.49	---	3.42	9.60	10.71	0.60	2.27	2.72	4.23	A
	20+25+71	1.65	2.07	5.88	---	3.72	9.60	10.74	0.64	2.26	2.71	4.25	A
	20+35+35	2.14	3.73	3.73	---	3.01	9.60	10.35	0.59	2.43	2.84	3.95	A

HEATING														
OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL	
		A ROOM	B ROOM	C ROOM	D ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
4MXS80E	2.0+3.5+4.2	1.99	3.46	4.15	---	3.20	9.60	10.36	0.63	2.43	2.84	3.95	A	
	2.0+3.5+5.0	1.83	3.20	4.57	---	3.42	9.60	10.49	0.63	2.39	2.80	4.02	A	
	2.0+3.5+6.0	1.67	2.92	5.01	---	3.69	9.60	10.72	0.64	2.27	2.72	4.23	A	
	2.0+3.5+7.1	1.52	2.67	5.41	---	3.99	9.60	10.75	0.69	2.26	2.70	4.25	A	
	2.0+4.2+4.2	1.84	3.88	3.88	---	3.39	9.60	10.37	0.65	2.43	2.84	3.95	A	
	2.0+4.2+5.0	1.71	3.60	4.29	---	3.61	9.60	10.49	0.68	2.39	2.79	4.02	A	
	2.0+4.2+6.0	1.58	3.30	4.72	---	3.88	9.60	10.72	0.67	2.27	2.71	4.23	A	
	2.0+4.2+7.1	1.45	3.03	5.12	---	4.18	9.60	10.76	0.73	2.26	2.70	4.25	A	
	2.0+5.0+5.0	1.60	4.00	4.00	---	3.82	9.60	10.62	0.68	2.30	2.75	4.17	A	
	2.0+5.0+6.0	1.48	3.69	4.43	---	4.09	9.60	10.85	0.69	2.18	2.72	4.40	A	
	2.0+5.0+7.1	1.37	3.40	4.83	---	4.39	9.60	10.88	0.74	2.17	2.71	4.42	A	
	2.0+6.0+6.0	1.38	4.11	4.11	---	4.36	9.60	11.08	0.70	2.11	2.64	4.55	A	
	2.5+2.5+2.5	2.97	2.97	2.97	---	2.61	8.91	9.88	0.54	2.34	2.74	3.81	A	
	2.5+2.5+3.5	2.82	2.82	3.96	---	2.88	9.60	10.12	0.59	2.53	2.79	3.79	A	
	2.5+2.5+4.2	2.61	2.61	4.38	---	3.07	9.60	10.12	0.61	2.53	2.79	3.79	A	
	2.5+2.5+5.0	2.40	2.40	4.80	---	3.28	9.60	10.48	0.61	2.39	2.80	4.02	A	
	2.5+2.5+6.0	2.18	2.18	5.24	---	3.55	9.60	10.71	0.62	2.27	2.72	4.23	A	
	2.5+2.5+7.1	1.98	1.98	5.64	---	3.85	9.60	10.74	0.66	2.26	2.71	4.25	A	
	2.5+3.5+3.5	2.52	3.54	3.54	---	3.15	9.60	10.35	0.61	2.43	2.84	3.95	A	
	2.5+3.5+4.2	2.36	3.29	3.95	---	3.34	9.60	10.36	0.65	2.43	2.84	3.95	A	
	2.5+3.5+5.0	2.19	3.05	4.36	---	3.55	9.60	10.49	0.66	2.39	2.80	4.02	A	
	2.5+3.5+6.0	2.00	2.80	4.80	---	3.82	9.60	10.72	0.67	2.27	2.72	4.23	A	
	2.5+3.5+7.1	1.84	2.56	5.20	---	4.12	9.60	10.75	0.71	2.26	2.70	4.25	A	
	2.5+4.2+4.2	2.20	3.70	3.70	---	3.53	9.60	10.37	0.68	2.43	2.84	3.95	A	
	2.5+4.2+5.0	2.06	3.45	4.09	---	3.74	9.60	10.49	0.70	2.39	2.79	4.02	A	
	2.5+4.2+6.0	1.90	3.17	4.53	---	4.01	9.60	10.72	0.69	2.27	2.71	4.23	A	
	2.5+4.2+7.1	1.75	2.92	4.93	---	4.31	9.60	10.76	0.76	2.26	2.70	4.25	A	
	2.5+5.0+5.0	1.92	3.84	3.84	---	3.96	9.60	10.62	0.71	2.30	2.75	4.17	A	
	2.5+5.0+6.0	1.77	3.56	4.27	---	4.23	9.60	10.85	0.72	2.18	2.72	4.40	A	
	2.5+6.0+6.0	1.66	3.97	3.97	---	4.50	9.60	11.08	0.72	2.11	2.64	4.55	A	
	3.5+3.5+3.5	3.20	3.20	3.20	---	3.42	9.60	10.36	0.65	2.43	2.84	3.95	A	
	3.5+3.5+4.2	3.00	3.00	3.60	---	3.61	9.60	10.37	0.70	2.43	2.84	3.95	A	
	3.5+3.5+5.0	2.80	2.80	4.00	---	3.82	9.60	10.49	0.70	2.39	2.79	4.02	A	
	3.5+3.5+6.0	2.58	2.58	4.44	---	4.09	9.60	10.72	0.71	2.27	2.71	4.23	A	
	3.5+3.5+7.1	2.38	2.38	4.84	---	4.39	9.60	10.76	0.76	2.26	2.70	4.25	A	
	3.5+4.2+4.2	2.82	3.39	3.39	---	3.80	9.60	10.38	0.72	2.43	2.83	3.95	A	
	3.5+4.2+5.0	2.65	3.17	3.78	---	4.01	9.60	10.50	0.75	2.39	2.79	4.02	A	
	3.5+4.2+6.0	2.45	2.94	4.21	---	4.28	9.60	10.73	0.74	2.26	2.71	4.25	A	
	3.5+5.0+5.0	2.48	3.56	3.56	---	4.23	9.60	10.63	0.76	2.30	2.75	4.17	A	
	3.5+5.0+6.0	2.32	3.31	3.97	---	4.50	9.60	10.86	0.77	2.18	2.72	4.40	A	
	4.2+4.2+4.2	3.20	3.20	3.20	---	3.99	9.60	10.38	0.75	2.42	2.83	3.97	A	
	4.2+4.2+5.0	3.01	3.01	3.58	---	4.20	9.60	10.51	0.78	2.38	2.79	4.03	A	
	4.2+4.2+6.0	2.80	2.80	4.00	---	4.47	9.60	10.74	0.79	2.26	2.71	4.25	A	
	4.2+5.0+5.0	2.84	3.38	3.38	---	4.42	9.60	10.64	0.81	2.29	2.74	4.19	A	
	20+20+20+20	2.32	2.32	2.32	2.32	2.74	9.28	9.78	0.48	2.27	2.51	4.09	A	
	20+20+20+25	2.26	2.26	2.26	2.82	2.88	9.60	9.92	0.52	2.36	2.51	4.07	A	
	20+20+20+35	2.02	2.02	3.54	3.15	9.60	10.72	0.56	2.27	2.71	4.23	A		
	20+20+20+42	1.88	1.88	1.88	3.96	3.34	9.60	10.73	0.58	2.26	2.71	4.25	A	
	20+20+20+50	1.75	1.75	1.75	4.35	3.55	9.60	10.86	0.60	2.18	2.72	4.40	A	

HEATING														
OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL	
		A ROOM	B ROOM	C ROOM	D ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
4MXS80E	20+20+20+60	1.60	1.60	1.60	4.80	3.82	9.60	11.09	0.59	2.10	2.64	4.57	A	
	20+20+20+71	1.47	1.47	1.47	5.19	4.12	9.60	11.12	0.65	2.09	2.63	4.59	A	
	20+20+25+25	2.13	2.13	2.67	2.67	3.01	9.60	10.71	0.54	2.27	2.72	4.23	A	
	20+20+25+35	1.92	1.92	2.40	3.36	3.28	9.60	10.72	0.58	2.27	2.71	4.23	A	
	20+20+25+42	1.79	1.79	2.25	3.77	3.47	9.60	10.73	0.60	2.26	2.71	4.25	A	
	20+20+25+50	1.67	1.67	2.09	4.17	3.69	9.60	10.86	0.62	2.18	2.72	4.40	A	
	20+20+25+60	1.54	1.54	1.92	4.60	3.96	9.60	11.09	0.61	2.10	2.64	4.57	A	
	20+20+25+71	1.41	1.41	1.76	5.02	4.26	9.60	11.12	0.67	2.09	2.63	4.59	A	
	20+20+35+35	1.75	1.75	3.05	3.05	3.55	9.60	10.73	0.62	2.26	2.71	4.25	A	
	20+20+35+42	1.64	1.64	2.87	3.45	3.74	9.60	10.74	0.64	2.26	2.71	4.25	A	
	20+20+35+50	1.54	1.54	2.69	3.83	3.96	9.60	10.86	0.67	2.17	2.71	4.42	A	
	20+20+35+60	1.42	1.42	2.49	4.27	4.23	9.60	11.09	0.67	2.10	2.63	4.57	A	
	20+20+42+42	1.55	1.55	3.25	3.25	3.93	9.60	10.75	0.66	2.26	2.70	4.25	A	
	20+20+42+50	1.45	1.45	3.06	3.64	4.15	9.60	10.87	0.69	2.17	2.71	4.42	A	
	20+20+42+60	1.35	1.35	2.84	4.06	4.42	9.60	11.10	0.70	2.10	2.63	4.57	A	
	20+20+50+50	1.37	1.37	3.43	3.43	4.36	9.60	11.00	0.72	2.13	2.67	4.51	A	
	20+25+25+25	2.01	2.53	2.53	2.53	3.15	9.60	10.71	0.56	2.27	2.72	4.23	A	
	20+25+25+35	1.82	2.29	2.29	3.20	3.42	9.60	10.72	0.60	2.27	2.71	4.23	A	
	20+25+25+42	1.72	2.14	2.14	3.60	3.61	9.60	10.73	0.62	2.26	2.71	4.25	A	
	20+25+25+50	1.60	2.00	2.00	4.00	3.82	9.60	10.86	0.65	2.18	2.72	4.40	A	
	20+25+25+60	1.47	1.85	1.85	4.43	4.09	9.60	11.09	0.65	2.10	2.64	4.57	A	
	20+25+25+71	1.37	1.70	1.70	4.83	4.39	9.60	11.12	0.69	2.09	2.63	4.59	A	
	20+25+35+35	1.67	2.09	2.92	2.92	3.69	9.60	10.73	0.64	2.26	2.71	4.25	A	
	20+25+35+42	1.58	1.97	2.75	3.30	3.88	9.60	10.74	0.66	2.26	2.71	4.25	A	
	20+25+35+50	1.48	1.85	2.58	3.69	4.09	9.60	10.86	0.69	2.18	2.71	4.40	A	
	20+25+35+60	1.38	1.71	2.40	4.11	4.36	9.60	11.09	0.70	2.10	2.63	4.57	A	
	20+25+42+42	1.50	1.86	3.12	3.12	4.07	9.60	10.75	0.69	2.26	2.70	4.25	A	
	20+25+42+50	1.41	1.75	2.94	3.50	4.28	9.60	10.87	0.71	2.17	2.71	4.42	A	
	20+25+50+50	1.32	1.66	3.31	3.31	4.50	9.60	11.00	0.74	2.13	2.67	4.51	A	
	20+35+35+35	1.53	2.69	2.69	2.69	3.96	9.60	10.74	0.69	2.26	2.71	4.25	A	
	20+35+35+42	1.45	2.55	2.55	3.05	4.15	9.60	10.75	0.71	2.26	2.70	4.25	A	
	20+35+35+50	1.37	2.40	2.40	3.43	4.36	9.60	10.87	0.74	2.17	2.71	4.42	A	
	20+35+42+42	1.38	2.42	2.90	2.90	4.34	9.60	10.75	0.76	2.26	2.70	4.25	A	
	25+25+25+25	2.40	2.40	2.40	2.40	3.28	9.60	10.71	0.58	2.27	2.72	4.23	A	
	25+25+25+35	2.18	2.18	2.18	3.06	3.55	9.60	10.72	0.62	2.27	2.71	4.23	A	
	25+25+25+42	2.05	2.05	3.45	3.74	9.60	10.73	0.64	2.26	2.71	4.25	A		
	25+25+25+50	1.92	1.92	3.84	3.96	9.60	10.86	0.67	2.18	2.72	4.40	A		
	25+25+25+60	1.78	1.78	4.26	4.23	9.60	11.09	0.68	2.10	2.64	4.57	A		
	25+25+35+35	2.00	2.00	2.80	2.80	3.82	9.60	10.73	0.67	2.26	2.71	4.25	A	
	25+25+35+42	1.89	1.89	2.65	3.17	4.01	9.60	10.74	0.69	2.26	2.71	4.25	A	
	25+25+35+50	1.78	1.78	2.49	3.55	4.23	9.60	10.86	0.71	2.18	2.71	4.40	A	
	25+25+35+60	1.66	1.66	2.32	3.96	4.50	9.60	11.09	0.72	2.10	2.63	4.57	A	
	25+25+42+42	1.79	1.79	3.01	3.01	4.20	9.60	10.75	0.71	2.26	2.70	4.25	A	
	25+25+42+50	1.69	1.69	2.85	3.37	4.42	9.60	10.87	0.76	2.17	2.71	4.42	A	
	25+35+35+35	1.86	2.58	2.58	2.58	4.09	9.60	10.74	0.71	2.26	2.71	4.25	A	
	25+35+35+42	1.76	2.45	2.45	2.94	4.28	9.60	10.75	0.74	2.26	2.70	4.25	A	
	25+35+35+50	1.65	2.32	2.32	3.31	4.50	9.60	10.87	0.76	2.17	2.71	4.42	A	
	25+35+42+42	1.67	2.33	2.80	2.80	4.47	9.60	10.75	0.78	2.26	2.70	4.25	A	
	35+35+35+35	2.40	2.40	2.40	2.40	4.36	9.60	10.75	0.76	2.26	2.70	4.25	A	

COOLING															
OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	E ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
5MXS90E	2.0	2.00	---	---	---	---	1.88	2.00	3.03	0.45	0.56	1.02	3.57	A	280
	2.5	2.50	---	---	---	---	2.00	2.50	3.54	0.49	0.71	1.18	3.52	A	355
	3.5	3.50	---	---	---	---	2.05	3.50	4.82	0.52	1.14	1.47	3.07	B	570
	4.2	4.20	---	---	---	---	2.13	4.20	5.14	0.56	1.38	1.69	3.04	B	690
	5.0	5.00	---	---	---	---	2.22	5.00	5.50	0.49	1.64	1.83	3.05	B	820
	6.0	6.00	---	---	---	---	2.33	6.00	6.60	0.50	1.89	2.24	3.17	B	945
	7.1	7.10	---	---	---	---	2.45	7.10	7.38	0.53	2.57	2.74	2.76	D	1,285
	2.0+2.0	2.00	2.00	---	---	---	2.11	4.00	5.30	0.50	1.14	1.79	3.51	A	570
	2.0+2.5	2.00	2.50	---	---	---	2.16	4.50	5.73	0.50	1.30	1.79	3.46	A	650
	2.0+3.5	2.00	3.50	---	---	---	2.27	5.50	6.36	0.50	1.70	2.09	3.24	A	850
	2.0+4.2	2.00	4.20	---	---	---	2.35	6.20	6.75	0.50	1.99	2.35	3.12	B	995
	2.0+5.0	2.00	5.00	---	---	---	2.44	7.00	7.31	0.50	2.42	2.59	2.89	C	1,210
	2.0+6.0	1.86	5.56	---	---	---	2.58	7.42	7.96	0.54	2.45	2.81	3.03	B	1,225
	2.0+7.1	1.71	6.09	---	---	---	2.74	7.80	8.47	0.57	2.69	3.13	2.90	C	1,345
	2.5+2.5	2.50	2.50	---	---	---	2.22	5.00	6.20	0.46	1.39	1.99	3.60	A	695
	2.5+3.5	2.50	3.50	---	---	---	2.33	6.00	6.60	0.50	1.89	2.25	3.17	B	945
	2.5+4.2	2.50	4.20	---	---	---	2.41	6.70	7.11	0.50	2.30	2.57	2.91	C	1,150
	2.5+5.0	2.41	4.83	---	---	---	2.51	7.24	7.64	0.53	2.59	2.82	2.80	D	1,295
	2.5+6.0	2.23	5.36	---	---	---	2.66	7.59	8.25	0.57	2.57	3.00	2.95	C	1,285
	2.5+7.1	2.08	5.90	---	---	---	2.82	7.98	8.47	0.60	2.81	3.13	2.84	C	1,405
	3.5+3.5	3.50	3.50	---	---	---	2.44	7.00	7.31	0.53	2.52	2.69	2.78	D	1,260
	3.5+4.2	3.32	3.99	---	---	---	2.54	7.31	7.66	0.53	2.69	2.92	2.72	D	1,345
	3.5+5.0	3.13	4.46	---	---	---	2.66	7.59	7.83	0.57	2.82	2.94	2.69	D	1,410
	3.5+6.0	2.93	5.01	---	---	---	2.80	7.94	8.45	0.60	2.81	3.13	2.83	C	1,405
	3.5+7.1	2.75	5.58	---	---	---	2.96	8.33	8.47	0.64	3.07	3.13	2.71	D	1,535
	4.2+4.2	3.78	3.78	---	---	---	2.64	7.56	7.67	0.56	2.86	2.92	2.64	D	1,430
	4.2+5.0	3.58	4.26	---	---	---	2.76	7.84	8.01	0.60	2.94	3.07	2.67	D	1,470
	4.2+6.0	3.37	4.82	---	---	---	2.91	8.19	8.46	0.60	2.94	3.13	2.79	D	1,470
	4.2+7.1	3.19	5.39	---	---	---	3.07	8.58	8.66	0.64	3.26	3.26	2.63	D	1,630
	5.0+5.0	4.06	4.06	---	---	---	2.88	8.12	8.18	0.60	3.09	3.19	2.63	D	1,545
	5.0+6.0	3.85	4.62	---	---	---	3.02	8.47	8.64	0.64	3.09	3.25	2.74	D	1,545
	5.0+7.1	3.66	5.20	---	---	---	3.19	8.86	8.88	0.67	3.36	3.39	2.64	D	1,680
	6.0+6.0	4.41	4.41	---	---	---	3.17	8.82	9.27	0.64	3.08	3.36	2.86	C	1,540
	6.0+7.1	4.12	4.88	---	---	---	3.33	9.00	9.29	0.68	3.08	3.36	2.92	C	1,540
	7.1+7.1	4.50	4.50	---	---	---	3.49	9.00	9.31	0.71	3.02	3.36	2.98	C	1,510
	2.0+2.0+2.0	2.00	2.00	2.00	---	---	2.33	6.00	6.63	0.50	1.66	1.96	3.61	A	830
	2.0+2.0+2.5	2.00	2.00	2.50	---	---	2.38	6.50	6.97	0.50	1.91	2.17	3.40	A	955
	2.0+2.0+3.5	1.93	1.93	3.38	---	---	2.51	7.24	7.64	0.54	2.34	2.57	3.09	B	1,170
	2.0+2.0+4.2	1.83	1.83	3.83	---	---	2.61	7.49	8.08	0.54	2.45	2.88	3.06	B	1,225
	2.0+2.0+5.0	1.72	1.72	4.33	---	---	2.73	7.77	8.53	0.57	2.59	3.09	3.00	C	1,295
	2.0+2.0+6.0	1.62	1.62	4.88	---	---	2.88	8.12	9.03	0.58	2.56	3.22	3.17	B	1,280
	2.0+2.0+7.1	1.53	1.53	5.45	---	---	3.04	8.51	9.30	0.61	2.82	3.36	3.02	B	1,410
	2.0+2.5+2.5	2.00	2.50	2.50	---	---	2.44	7.00	7.31	0.50	2.17	2.40	3.23	A	1,085
	2.0+2.5+3.5	1.86	2.32	3.24	---	---	2.58	7.42	7.96	0.54	2.45	2.81	3.03	B	1,225
	2.0+2.5+4.2	1.76	2.20	3.70	---	---	2.69	7.66	8.36	0.57	2.57	3.07	2.98	C	1,285
	2.0+2.5+5.0	1.67	2.09	4.18	---	---	2.80	7.94	8.65	0.57	2.71	3.15	2.93	C	1,355
	2.0+2.5+6.0	1.58	1.98	4.74	---	---	2.95	8.30	9.10	0.61	2.69	3.22	3.09	B	1,345
	2.0+2.5+7.1	1.50	1.87	5.31	---	---	3.11	8.68	9.30	0.64	2.95	3.36	2.94	C	1,475

COOLING															
OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	E ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
5MXS90E	2.0+35+35	1.73	3.02	3.02	---	---	2.73	7.77	8.47	0.57	2.69	3.13	2.89	C	1,345
	2.0+35+4.2	1.65	2.89	3.47	---	---	2.83	8.01	8.48	0.60	2.81	3.13	2.85	C	1,405
	2.0+35+5.0	1.58	2.77	3.95	---	---	2.95	8.30	8.66	0.61	2.96	3.16	2.80	D	1,480
	2.0+35+6.0	1.50	2.63	4.52	---	---	3.10	8.65	9.29	0.64	2.95	3.36	2.93	C	1,475
	2.0+35+7.1	1.43	2.50	5.07	---	---	3.26	9.00	9.31	0.68	3.15	3.36	2.86	C	1,575
	2.0+4.2+4.2	1.58	3.34	3.34	---	---	2.94	8.26	8.49	0.60	3.00	3.13	2.75	D	1,500
	2.0+4.2+5.0	1.53	3.20	3.81	---	---	3.05	8.54	8.84	0.64	3.09	3.29	2.76	D	1,545
	2.0+4.2+6.0	1.46	3.06	4.37	---	---	3.20	8.89	9.30	0.64	3.08	3.36	2.89	C	1,540
	2.0+4.2+7.1	1.36	2.84	4.80	---	---	3.36	9.00	9.32	0.68	3.15	3.36	2.86	C	1,575
	2.0+5.0+5.0	1.46	3.68	3.68	---	---	3.17	8.82	9.02	0.64	3.18	3.32	2.77	D	1,590
	2.0+5.0+6.0	1.39	3.46	4.15	---	---	3.32	9.00	9.47	0.68	2.97	3.39	3.03	B	1,485
	2.0+5.0+7.1	1.28	3.19	4.53	---	---	3.48	9.00	9.49	0.71	2.90	3.39	3.10	B	1,450
	2.0+6.0+6.0	1.28	3.86	3.86	---	---	3.46	9.00	9.93	0.68	2.68	3.46	3.36	A	1,340
	2.0+6.0+7.1	1.19	3.58	4.23	---	---	3.63	9.00	10.40	0.71	2.61	4.00	3.45	A	1,305
	2.5+2.5+2.5	2.41	2.41	2.41	---	---	2.51	7.23	7.64	0.54	2.34	2.57	3.09	B	1,170
	2.5+2.5+3.5	2.23	2.23	3.13	---	---	2.66	7.59	8.25	0.57	2.57	3.00	2.95	C	1,285
	2.5+2.5+4.2	2.13	2.13	3.58	---	---	2.76	784	8.47	0.57	2.69	3.13	2.91	C	1,345
	2.5+2.5+5.0	2.03	2.03	4.06	---	---	2.88	8.12	8.65	0.61	2.83	3.15	2.87	C	1,415
	2.5+2.5+6.0	1.93	1.93	4.61	---	---	3.02	8.47	9.10	0.61	2.82	3.22	3.00	C	1,410
	2.5+2.5+7.1	1.83	1.83	5.20	---	---	3.19	8.86	9.30	0.64	3.08	3.36	2.88	C	1,540
	2.5+3.5+3.5	2.08	2.93	2.93	---	---	2.80	7.94	8.47	0.60	2.75	3.13	2.89	C	1,375
	2.5+3.5+4.2	2.01	2.81	3.37	---	---	2.91	8.19	8.48	0.60	2.94	3.13	2.79	D	1,470
	2.5+3.5+5.0	1.93	2.70	3.84	---	---	3.02	8.47	8.66	0.64	3.02	3.16	2.80	D	1,510
	2.5+3.5+6.0	1.84	2.57	4.41	---	---	3.17	8.82	9.29	0.64	3.01	3.36	2.93	C	1,505
	2.5+3.5+7.1	1.72	2.40	4.88	---	---	3.33	9.00	9.31	0.68	3.15	3.36	2.86	C	1,575
	2.5+4.2+4.2	1.94	3.25	3.25	---	---	3.01	8.44	8.44	0.64	3.13	3.13	2.70	D	1,565
	2.5+4.2+5.0	1.86	3.13	3.73	---	---	3.13	8.72	8.84	0.64	3.22	3.29	2.71	D	1,610
	2.5+4.2+6.0	1.77	2.98	4.25	---	---	3.27	9.00	9.30	0.68	3.15	3.36	2.86	C	1,575
	2.5+4.2+7.1	1.63	2.74	4.63	---	---	3.44	9.00	9.32	0.71	3.15	3.36	2.86	C	1,575
	2.5+5.0+5.0	1.80	3.60	3.60	---	---	3.24	9.00	9.02	0.67	3.32	3.37	2.71	D	1,660
	2.5+5.0+6.0	1.67	3.33	4.00	---	---	3.39	9.00	9.47	0.68	3.04	3.39	2.96	C	1,520
	2.5+5.0+7.1	1.54	3.08	4.38	---	---	3.55	9.00	9.49	0.71	2.97	3.39	3.03	B	1,485
	2.5+6.0+6.0	1.56	3.72	3.72	---	---	3.54	9.00	9.93	0.71	2.75	3.46	3.27	A	1,375
	2.5+6.0+7.1	1.44	3.46	4.10	---	---	3.70	9.00	10.40	0.71	2.68	4.00	3.36	A	1,340
	3.5+3.5+3.5	2.77	2.77	2.77	---	---	2.95	8.31	8.60	0.64	3.07	3.26	2.71	D	1,535
	3.5+3.5+4.2	2.67	2.67	3.20	---	---	3.05	8.54	8.66	0.64	3.20	3.26	2.67	D	1,600
	3.5+3.5+5.0	2.57	2.57	3.68	---	---	3.17	8.82	8.84	0.67	3.29	3.32	2.68	D	1,645
	3.5+3.5+6.0	2.42	2.42	4.16	---	---	3.32	9.00	9.30	0.68	3.08	3.36	2.92	C	1,540
	3.5+3.5+7.1	2.23	2.23	4.54	---	---	3.48	9.00	9.32	0.71	3.02	3.36	2.98	C	1,510
	3.5+4.2+4.2	2.59	3.10	3.10	---	---	3.16	8.79	8.79	0.67	3.26	3.26	2.70	D	1,630
	3.5+4.2+5.0	2.48	2.98	3.54	---	---	3.27	9.00	9.00	0.67	3.29	3.29	2.74	D	1,645
	3.5+4.2+6.0	2.30	2.76	3.94	---	---	3.42	9.00	9.31	0.71	3.15	3.36	2.86	C	1,575
	3.5+4.2+7.1	2.13	2.55	4.32	---	---	3.58	9.00	9.81	0.75	3.15	3.95	2.86	C	1,575
	3.5+5.0+5.0	2.34	3.33	3.33	---	---	3.39	9.00	9.02	0.71	3.32	3.35	2.71	D	1,660
	3.5+5.0+6.0	2.18	3.10	3.72	---	---	3.54	9.00	9.48	0.71	3.04	3.39	2.96	C	1,520
	3.5+5.0+7.1	2.02	2.88	4.10	---	---	3.70	9.00	9.94	0.75	2.97	3.91	3.03	B	1,485
	3.5+6.0+6.0	2.04	3.48	3.48	---	---	3.69	9.00	10.38	0.71	2.75	4.00	3.27	A	1,375
	4.2+4.2+4.2	3.00	3.00	3.00	---	---	3.26	9.00	9.00	0.71	3.27	3.27	2.75	D	1,635

COOLING															
OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	E ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
5MXS90E	4.2+4.2+5.0	2.82	2.82	3.36	---	---	3.38	9.00	9.08	0.71	3.29	3.29	2.74	D	1,645
	4.2+4.2+6.0	2.63	2.63	3.74	---	---	3.52	9.00	9.32	0.71	3.15	3.36	2.86	C	1,575
	4.2+4.2+7.1	2.44	2.44	4.12	---	---	3.69	9.00	9.82	0.75	3.16	3.95	2.85	C	1,580
	4.2+5.0+5.0	2.66	3.17	3.17	---	---	3.49	9.00	9.03	0.74	3.32	3.32	2.71	D	1,660
	4.2+5.0+6.0	2.49	2.96	3.55	---	---	3.64	9.00	9.98	0.75	3.04	3.98	2.96	C	1,520
	5.0+5.0+5.0	3.00	3.00	3.00	---	---	3.61	9.00	9.78	0.75	3.21	4.07	2.80	D	1,605
	20+20+20+20	1.86	1.86	1.86	1.86	---	2.58	7.44	7.96	0.54	2.04	2.32	3.65	A	1,020
	20+20+20+25	1.79	1.79	1.79	2.22	---	2.66	7.59	8.25	0.54	2.09	2.50	3.63	A	1,045
	20+20+20+35	1.67	1.67	1.67	2.93	---	2.80	7.94	8.78	0.58	2.32	2.82	3.42	A	1,160
	20+20+20+42	1.61	1.61	1.61	3.36	---	2.91	8.19	9.12	0.61	2.63	3.22	3.11	B	1,315
	20+20+20+50	1.54	1.54	1.54	3.85	---	3.02	8.47	9.30	0.61	2.71	3.25	3.13	B	1,355
	20+20+20+60	1.47	1.47	1.47	4.41	---	3.17	8.82	9.81	0.65	2.68	3.38	3.29	A	1,340
	20+20+20+71	1.37	1.37	1.37	4.89	---	3.33	9.00	9.96	0.65	2.82	3.46	3.19	B	1,410
	20+20+25+25	1.73	1.73	2.16	2.16	---	2.73	7.78	8.53	0.58	2.21	2.69	3.52	A	1,105
	20+20+25+35	1.62	1.62	2.03	2.85	---	2.88	8.12	9.03	0.58	2.56	3.22	3.17	B	1,280
	20+20+25+42	1.56	1.56	1.96	3.29	---	2.98	8.37	9.13	0.61	2.69	3.22	3.11	B	1,345
	20+20+25+50	1.50	1.50	1.88	3.77	---	3.10	8.65	9.49	0.64	2.84	3.39	3.05	B	1,420
	20+20+25+60	1.44	1.44	1.80	4.32	---	3.24	9.00	9.94	0.65	2.81	3.46	3.20	B	1,405
	20+20+25+71	1.32	1.32	1.65	4.71	---	3.41	9.00	9.96	0.68	2.82	3.46	3.19	B	1,410
	20+20+35+35	1.54	1.54	2.70	2.70	---	3.02	8.48	9.13	0.61	2.82	3.22	3.01	B	1,410
	20+20+35+42	1.49	1.49	2.61	3.13	---	3.13	8.72	9.32	0.64	2.95	3.36	2.96	C	1,475
	20+20+35+50	1.44	1.44	2.52	3.60	---	3.24	9.00	9.49	0.64	3.04	3.39	2.96	C	1,520
	20+20+35+60	1.33	1.33	2.34	4.00	---	3.39	9.00	9.95	0.68	2.75	3.46	3.27	A	1,375
	20+20+35+71	1.23	1.23	2.16	4.38	---	3.55	9.00	9.97	0.71	2.68	3.46	3.36	A	1,340
	20+20+42+42	1.45	1.45	3.03	3.03	---	3.23	8.96	9.33	0.64	3.09	3.36	2.90	C	1,545
	20+20+42+50	1.36	1.36	2.87	3.41	---	3.35	9.00	9.50	0.68	3.04	3.39	2.96	C	1,520
	20+20+42+60	1.27	1.27	2.66	3.80	---	3.49	9.00	9.96	0.68	2.81	3.46	3.20	B	1,405
	20+20+42+71	1.18	1.18	2.47	4.17	---	3.66	9.00	10.47	0.71	2.75	4.01	3.27	A	1,375
	20+20+50+50	1.29	1.29	3.21	3.21	---	3.46	9.00	9.68	0.68	2.92	3.42	3.08	B	1,460
	20+20+50+60	1.20	1.20	3.00	3.60	---	3.61	9.00	10.45	0.71	2.70	3.88	3.33	A	1,350
	20+25+25+25	1.67	2.09	2.09	2.09	---	2.80	7.94	8.78	0.58	2.32	2.82	3.42	A	1,160
	20+25+25+35	1.57	1.98	1.98	2.77	---	2.95	8.30	9.12	0.61	2.69	3.22	3.09	B	1,345
	20+25+25+42	1.53	1.91	1.91	3.19	---	3.05	8.54	9.31	0.61	2.82	3.36	3.03	B	1,410
	20+25+25+50	1.46	1.84	1.84	3.68	---	3.17	8.82	9.49	0.64	2.90	3.39	3.04	B	1,450
	20+25+25+60	1.39	1.73	1.73	4.15	---	3.32	9.00	9.94	0.65	2.75	3.46	3.27	A	1,375
	20+25+25+71	1.27	1.60	1.60	4.53	---	3.48	9.00	9.96	0.68	2.68	3.46	3.36	A	1,340
	20+25+35+35	1.50	1.89	2.63	2.63	---	3.10	8.65	9.31	0.64	2.88	3.36	3.00	C	1,440
	20+25+35+42	1.46	1.82	2.55	3.06	---	3.20	8.89	9.32	0.64	3.08	3.36	2.89	C	1,540
	20+25+35+50	1.39	1.73	2.42	3.46	---	3.32	9.00	9.49	0.68	3.04	3.39	2.96	C	1,520
	20+25+35+60	1.28	1.61	2.25	3.86	---	3.46	9.00	9.95	0.68	2.75	3.46	3.27	A	1,375
	20+25+35+71	1.19	1.49	2.09	4.23	---	3.63	9.00	10.42	0.71	2.68	4.01	3.36	A	1,340
	20+25+42+42	1.40	1.74	2.93	2.93	---	3.30	9.00	9.33	0.68	3.15	3.36	2.86	C	1,575
	20+25+42+50	1.32	1.64	2.76	3.28	---	3.42	9.00	9.50	0.68	3.04	3.39	2.96	C	1,520
	20+25+42+60	1.23	1.53	2.57	3.67	---	3.57	9.00	10.41	0.71	2.81	4.00	3.20	B	1,405
	20+25+50+50	1.25	1.55	3.10	3.10	---	3.54	9.00	9.68	0.71	2.92	3.42	3.08	B	1,460
	20+25+50+60	1.17	1.45	2.90	3.48	---	3.69	9.00	10.49	0.71	2.70	3.96	3.33	A	1,350
	20+35+35+35	1.44	2.52	2.52	2.52	---	3.24	9.00	9.32	0.68	3.15	3.36	2.86	C	1,575
	20+35+35+42	1.36	2.39	2.39	2.86	---	3.35	9.00	9.33	0.68	3.15	3.36	2.86	C	1,575

COOLING															
OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	E ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
5MXS90E	20+35+35+50	1.29	2.25	2.25	3.21	---	3.46	9.00	9.50	0.71	3.04	3.39	2.96	C	1,520
	20+35+35+60	1.20	2.10	2.10	3.60	---	3.61	9.00	10.40	0.71	2.75	4.01	3.27	A	1,375
	20+35+42+42	1.29	2.27	2.72	2.72	---	3.45	9.00	9.33	0.71	3.16	3.37	2.85	C	1,580
	20+35+42+50	1.23	2.14	2.57	3.06	---	3.57	9.00	10.00	0.71	3.04	3.99	2.96	C	1,520
	20+35+50+50	1.17	2.03	2.90	2.90	---	3.69	9.00	10.26	0.75	2.92	4.19	3.08	B	1,460
	20+42+42+42	1.23	2.59	2.59	2.59	---	3.55	9.00	9.34	0.71	3.16	3.37	2.85	C	1,580
	20+42+42+50	1.18	2.45	2.45	2.92	---	3.67	9.00	10.01	0.75	3.04	3.99	2.96	C	1,520
	25+25+25+25	2.03	2.03	2.03	2.03	---	2.88	8.12	9.03	0.58	2.56	3.22	3.17	B	1,280
	25+25+25+35	1.93	1.93	1.93	2.68	---	3.02	8.47	9.12	0.61	2.82	3.22	3.00	C	1,410
	25+25+25+42	1.87	1.86	1.86	3.13	---	3.13	8.72	9.31	0.64	2.95	3.36	2.96	C	1,475
	25+25+25+50	1.80	1.80	1.80	3.60	---	3.24	9.00	9.49	0.64	3.04	3.39	2.96	C	1,520
	25+25+25+60	1.67	1.67	1.67	3.99	---	3.39	9.00	9.94	0.68	2.75	3.46	3.27	A	1,375
	25+25+25+71	1.54	1.54	1.54	4.38	---	3.55	9.00	9.96	0.71	2.68	3.46	3.36	A	1,340
	25+25+35+35	1.84	1.84	2.57	2.57	---	3.17	8.82	9.31	0.64	3.02	3.36	2.92	C	1,510
	25+25+35+42	1.77	1.77	2.48	2.98	---	3.27	9.00	9.32	0.68	3.15	3.36	2.86	C	1,575
	25+25+35+50	1.67	1.67	2.33	3.33	---	3.39	9.00	9.49	0.68	3.04	3.39	2.96	C	1,520
	25+25+35+60	1.55	1.55	2.18	3.72	---	3.54	9.00	9.95	0.71	2.75	3.46	3.27	A	1,375
	25+25+35+71	1.44	1.44	2.02	4.10	---	3.70	9.00	10.42	0.71	2.68	4.01	3.36	A	1,340
	25+25+42+42	1.68	1.68	2.82	2.82	---	3.38	9.00	9.33	0.68	3.15	3.36	2.86	C	1,575
	25+25+42+50	1.58	1.58	2.67	3.17	---	3.49	9.00	9.50	0.71	3.04	3.39	2.96	C	1,520
	25+25+42+60	1.48	1.48	2.49	3.55	---	3.64	9.00	10.47	0.71	2.81	4.00	3.20	B	1,405
	25+25+50+50	1.50	1.50	3.00	3.00	---	3.61	9.00	10.25	0.71	2.92	4.18	3.08	B	1,460
	25+35+35+35	1.74	2.42	2.42	2.42	---	3.32	9.00	9.34	0.68	3.15	3.36	2.86	C	1,575
	25+35+35+42	1.64	2.30	2.30	2.76	---	3.42	9.00	9.33	0.71	3.15	3.36	2.86	C	1,575
	25+35+35+50	1.56	2.17	2.17	3.10	---	3.54	9.00	9.50	0.71	3.04	3.39	2.96	C	1,520
	25+35+35+60	1.46	2.03	2.03	3.48	---	3.69	9.00	10.40	0.71	2.75	4.01	3.27	A	1,375
	25+35+42+42	1.56	2.18	2.63	2.63	---	3.52	9.00	9.33	0.71	3.16	3.37	2.85	C	1,580
	25+35+42+50	1.48	2.07	2.49	2.96	---	3.64	9.00	10.00	0.75	3.04	3.99	2.96	C	1,520
	25+42+42+42	1.50	2.50	2.50	2.50	---	3.63	9.00	9.83	0.75	3.16	3.95	2.85	C	1,580
	35+35+35+35	2.25	2.25	2.25	2.25	---	3.46	9.00	9.32	0.71	3.15	3.36	2.86	C	1,575
	35+35+35+42	2.14	2.14	2.14	2.58	---	3.57	9.00	9.82	0.75	3.16	3.95	2.85	C	1,580
	35+35+35+50	2.03	2.03	2.03	2.91	---	3.69	9.00	9.95	0.75	3.04	3.91	2.96	C	1,520
	35+35+42+42	2.05	2.05	2.45	2.45	---	3.67	9.00	9.83	0.75	3.16	3.95	2.85	C	1,580
	20+20+20+20+20	1.63	1.63	1.63	1.63	1.63	2.88	8.15	9.03	0.58	2.30	2.81	3.54	A	1,150
	20+20+20+20+25	1.58	1.58	1.58	1.58	1.98	2.95	8.30	9.25	0.58	2.36	2.95	3.52	A	1,180
	20+20+20+20+35	1.50	1.50	1.50	1.50	2.65	3.10	8.65	9.64	0.61	2.55	3.24	3.39	A	1,275
	20+20+20+20+42	1.46	1.46	1.46	1.46	3.05	3.20	8.89	9.87	0.65	2.68	3.39	3.32	A	1,340
	20+20+20+20+50	1.38	1.38	1.38	1.38	3.48	3.32	9.00	10.09	0.65	2.70	3.49	3.33	A	1,350
	20+20+20+20+60	1.29	1.29	1.29	1.29	3.84	3.46	9.00	10.31	0.65	2.50	3.40	3.60	A	1,250
	20+20+20+20+71	1.19	1.19	1.19	1.19	4.24	3.63	9.00	10.46	0.68	2.47	3.48	3.64	A	1,235
	20+20+20+25+25	1.54	1.54	1.54	1.92	1.92	3.02	8.46	9.45	0.61	2.49	3.09	3.40	A	1,245
	20+20+20+25+35	1.47	1.47	1.47	1.84	2.57	3.17	8.82	9.81	0.61	2.68	3.39	3.29	A	1,340
	20+20+20+25+42	1.42	1.42	1.42	1.77	2.97	3.27	9.00	9.97	0.65	2.82	3.46	3.19	B	1,410
	20+20+20+25+50	1.33	1.33	1.33	1.67	3.34	3.39	9.00	10.15	0.65	2.70	3.49	3.33	A	1,350
	20+20+20+25+60	1.24	1.24	1.24	1.55	3.73	3.54	9.00	10.38	0.68	2.50	3.40	3.60	A	1,250
	20+20+20+25+71	1.15	1.15	1.15	1.44	4.11	3.70	9.00	10.50	0.71	2.47	3.48	3.64	A	1,235
	20+20+20+35+35	1.54	1.54	1.54	1.92	1.92	3.02	8.46	9.45	0.61	2.49	3.09	3.40	A	1,245
	20+20+20+35+42	1.31	1.31	1.31	2.31	2.76	3.42	9.00	9.98	0.68	2.75	3.46	3.27	A	1,375

COOLING															
OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	E ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
SMXS90E	20+20+20+35+50	1.24	1.24	1.24	2.17	3.11	3.54	9.00	10.16	0.68	2.74	3.49	3.28	A	1,370
	20+20+20+35+60	1.16	1.16	1.16	2.03	3.49	3.69	9.00	10.49	0.71	2.46	3.48	3.66	A	1,230
	20+20+20+42+42	1.24	1.24	1.24	2.64	2.64	3.52	9.00	9.99	0.68	2.75	3.47	3.27	A	1,375
	20+20+20+42+50	1.18	1.18	1.18	2.50	2.96	3.64	9.00	10.47	0.71	2.70	3.89	3.33	A	1,350
	20+20+25+25+25	1.51	1.51	1.88	1.88	1.88	3.10	8.66	9.64	0.61	2.55	3.24	3.40	A	1,275
	20+20+25+25+35	1.44	1.44	1.80	1.80	2.52	3.24	9.00	9.96	0.65	2.82	3.46	3.19	B	1,410
	20+20+25+25+42	1.37	1.37	1.70	1.70	2.86	3.35	9.00	9.66	0.65	2.86	3.46	3.15	B	1,430
	20+20+25+25+50	1.29	1.29	1.61	1.61	3.20	3.46	9.00	10.15	0.68	2.70	3.49	3.33	A	1,350
	20+20+25+25+60	1.20	1.20	1.50	1.50	3.60	3.61	9.00	10.45	0.68	2.46	3.48	3.66	A	1,230
	20+20+25+35+35	1.33	1.33	1.68	2.33	2.33	3.39	9.00	9.97	0.68	2.82	3.46	3.19	B	1,410
	20+20+25+35+42	1.27	1.27	1.58	2.22	2.66	3.49	9.00	9.66	0.68	2.79	3.46	3.23	A	1,395
	20+20+25+35+50	1.20	1.20	1.50	2.10	3.00	3.61	9.00	10.45	0.71	2.70	3.80	3.33	A	1,350
	20+20+25+42+42	1.21	1.21	1.50	2.54	2.54	3.60	9.00	10.44	0.71	2.75	4.01	3.27	A	1,375
	20+20+35+35+35	1.23	1.23	2.18	2.18	2.18	3.54	9.00	9.98	0.68	2.82	3.46	3.19	B	1,410
	20+20+35+35+42	1.18	1.18	2.07	2.07	2.50	3.64	9.00	10.47	0.71	2.75	4.01	3.27	A	1,375
	20+25+25+25+25	1.46	1.84	1.84	1.84	1.84	3.17	8.82	9.81	0.61	2.68	3.39	3.29	A	1,340
	20+25+25+25+35	1.39	1.73	1.73	1.73	2.42	3.32	9.00	9.96	0.65	2.82	3.46	3.19	B	1,410
	20+25+25+25+42	1.32	1.64	1.64	1.64	2.76	3.42	9.00	9.97	0.68	2.82	3.46	3.19	B	1,410
	20+25+25+25+50	1.25	1.55	1.55	1.55	3.10	3.54	9.00	10.15	0.68	2.70	3.49	3.33	A	1,350
	20+25+25+25+60	1.17	1.45	1.45	1.45	3.48	3.69	9.00	10.49	0.71	2.46	3.48	3.66	A	1,230
	20+25+25+35+35	1.28	1.61	1.61	2.25	2.25	3.46	9.00	9.97	0.68	2.82	3.46	3.19	B	1,410
	20+25+25+35+42	1.23	1.53	1.53	2.14	2.57	3.57	9.00	10.41	0.71	2.75	4.01	3.27	A	1,375
	20+25+25+35+50	1.17	1.45	1.45	2.03	2.90	3.69	9.00	10.49	0.71	2.70	3.88	3.33	A	1,350
	20+25+25+42+42	1.18	1.46	1.46	2.45	2.45	3.64	9.00	10.47	0.71	2.75	4.01	3.27	A	1,375
	20+25+35+35+35	1.20	1.50	2.10	2.10	2.10	3.61	9.00	10.42	0.71	2.82	4.01	3.19	B	1,410
	25+25+25+25+25	1.80	1.80	1.80	1.80	1.80	3.24	9.00	9.95	0.65	2.81	3.46	3.20	B	1,405
	25+25+25+25+35	1.67	1.67	1.67	1.67	2.32	3.39	9.00	9.96	0.68	2.75	3.46	3.27	A	1,375
	25+25+25+25+42	1.58	1.58	1.58	1.58	2.68	3.49	9.00	9.97	0.68	2.82	3.46	3.19	B	1,410
	25+25+25+25+50	1.50	1.50	1.50	1.50	3.00	3.61	9.00	10.45	0.71	2.70	3.88	3.33	A	1,350
	25+25+25+35+35	1.56	1.56	1.56	2.16	2.16	3.54	9.00	9.97	0.68	2.82	3.46	3.19	B	1,410
	25+25+25+35+42	1.48	1.48	1.48	2.07	2.49	3.64	9.00	10.47	0.71	2.75	4.01	3.27	A	1,375
	25+25+35+35+35	1.44	1.44	2.04	2.04	2.04	3.69	9.00	10.42	0.71	2.75	4.01	3.27	A	1,375

HEATING															
OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL	
		A ROOM	B ROOM	C ROOM	D ROOM	E ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
5MXS90E	2.0	2.44	---	---	---	---	1.36	2.44	4.20	0.35	0.68	1.38	3.59	B	
	2.5	3.05	---	---	---	---	1.42	3.05	4.65	0.37	0.90	1.48	3.39	C	
	3.5	4.27	---	---	---	---	1.54	4.27	5.11	0.39	1.43	1.95	2.99	D	
	4.2	5.12	---	---	---	---	1.75	5.12	5.16	0.60	1.73	1.98	2.96	D	
	5.0	6.09	---	---	---	---	1.98	6.09	7.42	0.48	1.91	2.48	3.19	D	
	6.0	7.31	---	---	---	---	2.28	7.31	8.53	0.60	2.30	2.89	3.18	D	
	7.1	8.65	---	---	---	---	2.60	8.65	9.02	0.67	2.87	3.04	3.01	D	
	2.0+2.0	2.44	2.44	---	---	---	1.69	4.88	6.85	0.39	1.21	1.87	4.03	A	
	2.0+2.5	2.44	3.05	---	---	---	1.84	5.49	7.25	0.41	1.40	2.05	3.92	A	
	2.0+3.5	2.44	4.26	---	---	---	2.13	6.70	7.74	0.50	1.99	2.44	3.37	C	
	2.0+4.2	2.44	5.11	---	---	---	2.34	7.55	8.53	0.62	2.33	2.81	3.24	C	
	2.0+5.0	2.44	6.09	---	---	---	2.57	8.53	9.09	0.63	2.45	2.66	3.48	B	
	2.0+6.0	2.32	6.95	---	---	---	2.86	9.27	9.88	0.65	2.63	2.96	3.52	B	
	2.0+7.1	2.20	7.83	---	---	---	3.17	10.03	10.37	0.69	3.01	3.18	3.33	C	
	2.5+2.5	3.04	3.04	---	---	---	1.98	6.08	7.46	0.47	1.76	2.35	3.45	B	
	2.5+3.5	3.05	4.26	---	---	---	2.28	7.31	8.53	0.60	2.34	2.94	3.12	D	
	2.5+4.2	3.04	5.12	---	---	---	2.49	8.16	9.02	0.65	2.76	3.18	2.96	D	
	2.5+5.0	2.98	5.95	---	---	---	2.72	8.93	9.70	0.66	2.61	2.99	3.42	B	
	2.5+6.0	2.83	6.79	---	---	---	3.00	9.62	9.88	0.67	2.86	3.03	3.36	C	
	2.5+7.1	2.70	7.68	---	---	---	3.31	10.38	10.77	0.72	3.22	3.46	3.22	C	
	3.5+3.5	4.27	4.27	---	---	---	2.57	8.54	9.02	0.65	2.91	3.15	2.93	D	
	3.5+4.2	4.12	4.94	---	---	---	2.77	9.06	9.60	0.70	3.21	3.53	2.82	D	
	3.5+5.0	3.96	5.66	---	---	---	3.00	9.62	9.70	0.71	2.93	2.98	3.28	C	
	3.5+6.0	3.80	6.51	---	---	---	3.28	10.31	10.75	0.72	3.19	3.43	3.23	C	
	3.5+7.1	3.43	6.97	---	---	---	3.59	10.40	10.78	0.77	3.11	3.35	3.34	C	
	4.2+4.2	4.77	4.77	---	---	---	2.97	9.54	9.61	0.72	3.47	3.53	2.75	E	
	4.2+5.0	4.61	5.49	---	---	---	3.20	10.10	10.12	0.73	3.22	3.28	3.14	D	
	4.2+6.0	4.28	6.12	---	---	---	3.48	10.40	10.76	0.75	3.24	3.42	3.21	C	
	4.2+7.1	3.87	6.53	---	---	---	3.79	10.40	10.78	0.79	3.11	3.34	3.34	C	
	5.0+5.0	5.20	5.20	---	---	---	3.42	10.40	10.64	0.76	3.28	3.40	3.17	D	
	5.0+6.0	4.73	5.67	---	---	---	3.70	10.40	10.88	0.75	3.08	3.31	3.38	C	
	5.0+7.1	4.30	6.10	---	---	---	4.01	10.40	10.51	0.83	3.01	3.06	3.46	B	
	6.0+6.0	5.20	5.20	---	---	---	3.99	10.40	10.71	0.76	2.88	3.04	3.61	A	
	6.0+7.1	4.76	5.64	---	---	---	4.30	10.40	10.74	0.84	2.86	3.03	3.64	A	
	7.1+7.1	5.20	5.20	---	---	---	4.61	10.40	10.77	0.89	2.85	3.02	3.65	A	
	2.0+2.0+2.0	2.44	2.44	2.44	---	---	2.28	7.32	8.67	0.53	1.84	2.32	3.98	A	
	2.0+2.0+2.5	2.44	2.44	3.04	---	---	2.43	7.92	9.21	0.55	2.05	2.58	3.86	A	
	2.0+2.0+3.5	2.38	2.38	4.17	---	---	2.72	8.93	9.89	0.60	2.42	2.89	3.69	A	
	2.0+2.0+4.2	2.30	2.30	4.81	---	---	2.91	9.41	9.89	0.64	2.62	2.89	3.59	B	
	2.0+2.0+5.0	2.21	2.21	5.54	---	---	3.14	9.96	10.48	0.65	2.84	3.07	3.51	B	
	2.0+2.0+6.0	2.08	2.08	6.24	---	---	3.42	10.40	10.71	0.66	2.87	3.04	3.62	A	
	2.0+2.0+7.1	1.87	1.87	6.66	---	---	3.73	10.40	10.75	0.70	2.86	3.03	3.64	A	
	2.0+2.5+2.5	2.43	3.05	3.05	---	---	2.57	8.53	9.21	0.57	2.28	2.58	3.74	A	
	2.0+2.5+3.5	2.31	2.90	4.06	---	---	2.86	9.27	9.89	0.62	2.57	2.89	3.61	A	
	2.0+2.5+4.2	2.24	2.80	4.71	---	---	3.06	9.75	10.36	0.67	2.78	3.12	3.51	B	
	2.0+2.5+5.0	2.17	2.71	5.43	---	---	3.28	10.31	10.48	0.67	3.02	3.07	3.41	B	
	2.0+2.5+6.0	1.98	2.48	5.94	---	---	3.56	10.40	10.71	0.68	2.87	3.04	3.62	A	
	2.0+2.5+7.1	1.79	2.24	6.37	---	---	3.87	10.40	10.75	0.73	2.86	3.03	3.64	A	

HEATING														
OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL
		A ROOM	B ROOM	C ROOM	D ROOM	E ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.		
5MXS90E	2.0+3.5+3.5	2.22	3.87	3.87	---	---	3.14	9.96	10.36	0.69	2.89	3.12	3.45	B
	2.0+3.5+4.2	2.14	3.75	4.51	---	---	3.34	10.40	10.55	0.72	3.18	3.23	3.27	C
	2.0+3.5+5.0	1.98	3.47	4.95	---	---	3.56	10.40	10.90	0.72	3.07	3.30	3.39	C
	2.0+3.5+6.0	1.80	3.17	5.43	---	---	3.84	10.40	10.72	0.73	2.87	3.04	3.62	A
	2.0+3.5+7.1	1.65	2.89	5.86	---	---	4.15	10.40	10.75	0.81	2.86	3.03	3.64	A
	2.0+4.2+4.2	2.00	4.20	4.20	---	---	3.53	10.40	10.56	0.74	3.12	3.23	3.33	C
	2.0+4.2+5.0	1.86	3.90	4.64	---	---	3.76	10.40	10.91	0.77	3.07	3.30	3.39	C
	2.0+4.2+6.0	1.70	3.58	5.12	---	---	4.04	10.40	10.73	0.78	2.87	3.04	3.62	A
	2.0+4.2+7.1	1.56	3.28	5.56	---	---	4.35	10.40	10.76	0.83	2.86	3.02	3.64	A
	2.0+5.0+5.0	1.74	4.33	4.33	---	---	3.99	10.40	10.63	0.80	2.96	3.08	3.51	B
	2.0+5.0+6.0	1.60	4.00	4.80	---	---	4.27	10.40	10.86	0.79	2.77	2.99	3.75	A
	2.0+5.0+7.1	1.47	3.69	5.24	---	---	4.58	10.40	10.89	0.86	2.75	2.97	3.78	A
	2.0+6.0+6.0	1.48	4.46	4.46	---	---	4.55	10.40	11.09	0.82	2.62	2.90	3.97	A
	2.0+6.0+7.1	1.38	4.13	4.89	---	---	4.86	10.40	11.12	0.87	2.61	2.89	3.98	A
	2.5+2.5+2.5	2.98	2.98	2.98	---	---	2.72	8.94	9.88	0.60	2.42	2.89	3.69	A
	2.5+2.5+3.5	2.83	2.83	3.96	---	---	3.00	9.62	9.89	0.67	2.73	2.89	3.52	B
	2.5+2.5+4.2	2.74	2.74	4.62	---	---	3.20	10.10	10.36	0.69	3.01	3.12	3.36	C
	2.5+2.5+5.0	2.60	2.60	5.20	---	---	3.42	10.40	10.89	0.70	3.07	3.30	3.39	C
	2.5+2.5+6.0	2.36	2.36	5.68	---	---	3.70	10.40	10.71	0.71	2.87	3.04	3.62	A
	2.5+2.5+7.1	2.15	2.15	6.10	---	---	4.01	10.40	10.75	0.78	2.86	3.03	3.64	A
	2.5+3.5+3.5	2.71	3.80	3.80	---	---	3.28	10.31	10.76	0.72	3.12	3.35	3.30	C
	2.5+3.5+4.2	2.55	3.57	4.28	---	---	3.48	10.40	10.77	0.74	3.18	3.35	3.27	C
	2.5+3.5+5.0	2.36	3.31	4.73	---	---	3.70	10.40	10.90	0.75	3.07	3.30	3.39	C
	2.5+3.5+6.0	2.17	3.03	5.20	---	---	3.99	10.40	10.72	0.76	2.87	3.04	3.62	A
	2.5+3.5+7.1	1.98	2.78	5.64	---	---	4.30	10.40	10.75	0.83	2.86	3.03	3.64	A
	2.5+4.2+4.2	2.38	4.01	4.01	---	---	3.68	10.40	10.77	0.77	3.12	3.35	3.33	C
	2.5+4.2+5.0	2.23	3.73	4.44	---	---	3.90	10.40	10.91	0.80	3.07	3.30	3.39	C
	2.5+4.2+6.0	2.05	3.44	4.91	---	---	4.18	10.40	10.73	0.81	2.87	3.04	3.62	A
	2.5+4.2+7.1	1.88	3.17	5.35	---	---	4.49	10.40	10.76	0.86	2.86	3.02	3.64	A
	2.5+5.0+5.0	2.08	4.16	4.16	---	---	4.13	10.40	10.63	0.83	2.96	3.08	3.51	B
	2.5+5.0+6.0	1.93	3.85	4.62	---	---	4.41	10.40	10.86	0.84	2.77	2.99	3.75	A
	2.5+5.0+7.1	1.78	3.56	5.06	---	---	4.72	10.40	10.89	0.89	2.75	2.97	3.78	A
	2.5+6.0+6.0	1.80	4.30	4.30	---	---	4.69	10.40	11.09	0.85	2.62	2.90	3.97	A
	2.5+6.0+7.1	1.67	4.00	4.73	---	---	5.00	10.40	11.12	0.90	2.61	2.89	3.98	A
	3.5+3.5+3.5	3.46	3.46	3.46	---	---	3.56	10.38	10.76	0.77	3.12	3.35	3.33	C
	3.5+3.5+4.2	3.25	3.25	3.90	---	---	3.76	10.40	10.77	0.80	3.12	3.35	3.33	C
	3.5+3.5+5.0	3.03	3.03	4.34	---	---	3.99	10.40	10.91	0.83	3.07	3.30	3.39	C
	3.5+3.5+6.0	2.80	2.80	4.80	---	---	4.27	10.40	10.73	0.84	2.87	3.04	3.62	A
	3.5+3.5+7.1	2.58	2.58	5.24	---	---	4.58	10.40	10.76	0.89	2.86	3.02	3.64	A
	3.5+4.2+4.2	3.06	3.67	3.67	---	---	3.96	10.40	10.78	0.85	3.11	3.34	3.34	C
	3.5+4.2+5.0	2.87	3.44	4.09	---	---	4.18	10.40	10.51	0.85	3.01	3.12	3.46	B
	3.5+4.2+6.0	2.66	3.19	4.55	---	---	4.46	10.40	10.74	0.87	2.87	3.03	3.62	A
	3.5+4.2+7.1	2.46	2.95	4.99	---	---	4.78	10.40	10.77	0.95	2.85	3.02	3.65	A
	3.5+5.0+5.0	2.70	3.85	3.85	---	---	4.41	10.40	10.64	0.89	2.96	3.07	3.51	B
	3.5+5.0+6.0	2.51	3.59	4.30	---	---	4.69	10.40	10.86	0.90	2.76	2.98	3.77	A
	3.5+5.0+7.1	2.34	3.33	4.73	---	---	5.00	10.40	10.90	0.95	2.75	2.97	3.78	A
	3.5+6.0+6.0	2.34	4.03	4.03	---	---	4.97	10.40	11.09	0.91	2.62	2.90	3.97	A
	4.2+4.2+4.2	3.47	3.47	3.47	---	---	4.15	10.40	10.79	0.88	3.11	3.34	3.34	C

HEATING														
OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL
		A ROOM	B ROOM	C ROOM	D ROOM	E ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.		
5MXS90E	4.2+4.2+5.0	3.26	3.26	3.88	---	---	4.38	10.40	10.52	0.91	3.00	3.12	3.47	B
	4.2+4.2+6.0	3.03	3.03	4.34	---	---	4.66	10.40	10.75	0.92	2.86	3.03	3.64	A
	4.2+4.2+7.1	2.82	2.82	4.76	---	---	4.97	10.40	10.78	0.98	2.85	3.02	3.65	A
	4.2+5.0+5.0	3.08	3.66	3.66	---	---	4.61	10.40	10.64	0.91	2.96	3.07	3.51	B
	4.2+5.0+6.0	2.87	3.42	4.11	---	---	4.89	10.40	10.87	0.93	2.76	2.98	3.77	A
	5.0+5.0+5.0	3.46	3.46	3.46	---	---	4.83	10.38	10.77	0.95	2.85	3.02	3.64	A
	2.0+2.0+2.0+2.0	2.32	2.32	2.32	---	2.86	9.28	10.18	0.57	2.39	2.76	3.88	A	
	2.0+2.0+2.0+2.5	2.26	2.26	2.26	2.84	---	3.00	9.62	10.18	0.59	2.49	2.76	3.86	A
	2.0+2.0+2.0+3.5	2.17	2.17	2.17	3.80	---	3.28	10.31	10.73	0.63	2.81	3.04	3.67	A
	2.0+2.0+2.0+4.2	2.04	2.04	4.28	---	3.48	10.40	10.74	0.66	2.87	3.03	3.62	A	
	2.0+2.0+2.0+5.0	1.89	1.89	4.73	---	3.70	10.40	10.86	0.68	2.76	2.99	3.77	A	
	2.0+2.0+2.0+6.0	1.73	1.73	5.21	---	3.99	10.40	11.09	0.69	2.62	2.90	3.97	A	
	2.0+2.0+2.0+7.1	1.59	1.59	5.63	---	4.30	10.40	11.12	0.74	2.61	2.88	3.98	A	
	2.0+2.0+2.5+2.5	2.21	2.21	2.77	2.77	---	3.14	9.96	10.72	0.61	2.65	3.04	3.76	A
	2.0+2.0+2.5+3.5	2.08	2.08	2.60	3.64	---	3.42	10.40	10.73	0.66	2.87	3.04	3.62	A
	2.0+2.0+2.5+4.2	1.94	1.94	2.44	4.08	---	3.62	10.40	10.74	0.68	2.87	3.03	3.62	A
	2.0+2.0+2.5+5.0	1.81	1.81	2.26	4.52	---	3.84	10.40	10.86	0.71	2.76	2.99	3.77	A
	2.0+2.0+2.5+6.0	1.66	1.66	2.08	5.00	---	4.13	10.40	11.09	0.72	2.62	2.90	3.97	A
	2.0+2.0+2.5+7.1	1.53	1.53	1.91	5.43	---	4.44	10.40	11.12	0.79	2.61	2.88	3.98	A
	2.0+2.0+3.5+3.5	1.89	1.89	3.31	3.31	---	3.70	10.40	10.74	0.71	2.87	3.03	3.62	A
	2.0+2.0+3.5+4.2	1.78	1.78	3.11	3.73	---	3.90	10.40	10.74	0.76	2.86	3.03	3.64	A
	2.0+2.0+3.5+5.0	1.66	1.66	2.91	4.17	---	4.13	10.40	10.87	0.76	2.76	2.98	3.77	A
	2.0+2.0+3.5+6.0	1.54	1.54	2.70	4.62	---	4.41	10.40	11.10	0.77	2.61	2.89	3.98	A
	2.0+2.0+3.5+7.1	1.42	1.42	2.49	5.07	---	4.72	10.40	11.13	0.84	2.60	2.88	4.00	A
	2.0+2.0+4.2+4.2	1.68	1.68	3.52	3.52	---	4.10	10.40	10.75	0.78	2.86	3.03	3.64	A
	2.0+2.0+4.2+5.0	1.58	1.58	3.31	3.93	---	4.32	10.40	10.88	0.81	2.76	2.98	3.77	A
	2.0+2.0+4.2+6.0	1.46	1.46	3.09	4.39	---	4.61	10.40	11.11	0.82	2.61	2.89	3.98	A
	2.0+2.0+4.2+7.1	1.36	1.36	2.85	4.83	---	4.92	10.40	11.14	0.90	2.60	2.88	4.00	A
	2.0+2.0+5.0+5.0	1.49	1.49	3.71	3.71	---	4.55	10.40	11.01	0.84	2.71	2.93	3.84	A
	2.0+2.0+5.0+6.0	1.39	1.39	3.47	4.15	---	4.83	10.40	11.23	0.85	2.51	2.90	4.14	A
	2.0+2.5+2.5+2.5	2.18	2.71	2.71	2.71	---	3.28	10.31	10.72	0.64	2.82	3.04	3.66	A
	2.0+2.5+2.5+3.5	1.97	2.48	2.48	3.47	---	3.56	10.40	10.73	0.68	2.87	3.04	3.62	A
	2.0+2.5+2.5+4.2	1.86	2.32	2.32	3.90	---	3.76	10.40	10.74	0.73	2.87	3.03	3.62	A
	2.0+2.5+2.5+5.0	1.73	2.17	2.17	4.33	---	3.99	10.40	10.86	0.73	2.76	2.99	3.77	A
	2.0+2.5+2.5+6.0	1.60	2.00	2.00	4.80	---	4.27	10.40	11.09	0.74	2.62	2.90	3.97	A
	2.0+2.5+2.5+7.1	1.48	1.84	1.84	5.24	---	4.58	10.40	11.12	0.82	2.61	2.88	3.98	A
	2.0+2.5+3.5+3.5	1.80	2.26	3.17	3.17	---	3.84	10.40	10.74	0.73	2.87	3.03	3.62	A
	2.0+2.5+3.5+4.2	1.71	2.13	2.98	3.58	---	4.04	10.40	10.74	0.78	2.86	3.03	3.64	A
	2.0+2.5+3.5+5.0	1.60	2.00	2.80	4.00	---	4.27	10.40	10.87	0.78	2.76	2.98	3.77	A
	2.0+2.5+3.5+6.0	1.48	1.86	2.60	4.46	---	4.55	10.40	11.10	0.82	2.61	2.89	3.98	A
	2.0+2.5+3.5+7.1	1.38	1.72	2.41	4.89	---	4.86	10.40	11.13	0.87	2.60	2.88	4.00	A
	2.0+2.5+4.2+4.2	1.61	2.01	3.39	3.39	---	4.24	10.40	10.75	0.81	2.86	3.03	3.64	A
	2.0+2.5+4.2+5.0	1.52	1.90	3.19	3.79	---	4.46	10.40	10.88	0.84	2.76	2.98	3.77	A
	2.0+2.5+4.2+6.0	1.42	1.77	2.97	4.24	---	4.75	10.40	11.11	0.85	2.61	2.89	3.98	A
	2.0+2.5+5.0+5.0	1.43	1.79	3.59	3.59	---	4.69	10.40	11.01	0.87	2.71	2.93	3.84	A
	2.0+2.5+5.0+6.0	1.34	1.68	3.35	4.03	---	4.97	10.40	11.23	0.88	2.51	2.90	4.14	A
	2.0+3.5+3.5+3.5	1.67	2.91	2.91	2.91	---	4.13	10.40	10.74	0.78	2.86	3.03	3.64	A
	2.0+3.5+3.5+4.2	1.58	2.76	2.76	3.30	---	4.32	10.40	10.75	0.84	2.86	3.03	3.64	A

HEATING															
OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL	
		A ROOM	B ROOM	C ROOM	D ROOM	E ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.			
5MXS90E	20+35+35+50	1.49	2.60	2.60	3.71	---	4.55	10.40	10.88	0.87	2.76	2.98	3.77	A	
	20+35+35+60	1.38	2.43	2.43	4.16	---	4.83	10.40	11.11	0.87	2.61	2.89	3.98	A	
	20+35+42+42	1.50	2.62	3.14	3.14	---	4.52	10.40	10.76	0.89	2.86	3.02	3.64	A	
	20+35+42+50	1.41	2.48	2.97	3.54	---	4.75	10.40	10.89	0.89	2.75	2.98	3.78	A	
	20+35+50+50	1.35	2.35	3.35	3.35	---	4.97	10.40	11.01	0.92	2.65	2.93	3.92	A	
	20+42+42+42	1.43	2.99	2.99	2.99	---	4.72	10.40	10.77	0.92	2.85	3.02	3.65	A	
	20+42+42+50	1.35	2.84	2.84	3.37	---	4.94	10.40	10.90	0.95	2.75	2.97	3.78	A	
	25+25+25+25	2.60	2.60	2.60	2.60	---	3.42	10.40	10.72	0.66	2.87	3.04	3.62	A	
	25+25+25+35	2.36	2.36	2.36	3.32	---	3.70	10.40	10.73	0.71	2.87	3.04	3.62	A	
	25+25+25+42	2.22	2.22	2.22	3.74	---	3.90	10.40	10.74	0.76	2.87	3.03	3.62	A	
	25+25+25+50	2.08	2.08	2.08	4.16	---	4.13	10.40	10.86	0.76	2.76	2.99	3.77	A	
	25+25+25+60	1.93	1.93	1.93	4.61	---	4.41	10.40	11.09	0.77	2.62	2.90	3.97	A	
	25+25+25+71	1.78	1.78	1.78	5.06	---	4.72	10.40	11.12	0.84	2.61	2.88	3.98	A	
	25+25+35+35	2.17	2.17	3.03	3.03	---	3.99	10.40	10.74	0.76	2.87	3.03	3.62	A	
	25+25+35+42	2.05	2.05	2.87	3.43	---	4.18	10.40	10.74	0.81	2.86	3.03	3.64	A	
	25+25+35+50	1.93	1.93	2.70	3.84	---	4.41	10.40	10.87	0.84	2.76	2.98	3.77	A	
	25+25+35+60	1.79	1.79	2.51	4.31	---	4.69	10.40	11.10	0.85	2.61	2.89	3.98	A	
	25+25+35+71	1.67	1.67	2.33	4.73	---	5.00	10.40	11.13	0.90	2.60	2.88	4.00	A	
	25+25+42+42	1.94	1.94	3.26	3.26	---	4.38	10.40	10.75	0.84	2.86	3.03	3.64	A	
	25+25+42+50	1.83	1.83	3.08	3.66	---	4.61	10.40	10.88	0.87	2.76	2.98	3.77	A	
	25+25+42+60	1.71	1.71	2.87	4.11	---	4.89	10.40	11.11	0.87	2.61	2.89	3.98	A	
	25+25+50+50	1.73	1.73	3.47	3.47	---	4.83	10.40	11.01	0.90	2.71	2.93	3.84	A	
	25+35+35+35	2.00	2.80	2.80	2.80	---	4.27	10.40	10.74	0.84	2.86	3.03	3.64	A	
	25+35+35+42	1.90	2.66	2.66	3.18	---	4.46	10.40	10.75	0.86	2.86	3.03	3.64	A	
	25+35+35+50	1.79	2.51	2.51	3.59	---	4.69	10.40	10.88	0.89	2.76	2.98	3.77	A	
	25+35+35+60	1.67	2.35	2.35	4.03	---	4.97	10.40	11.11	0.90	2.61	2.89	3.98	A	
	25+35+42+42	1.81	2.53	3.03	3.03	---	4.66	10.40	10.76	0.92	2.86	3.02	3.64	A	
	25+35+42+50	1.72	2.39	2.87	3.42	---	4.89	10.40	10.89	0.92	2.75	2.98	3.78	A	
	25+42+42+42	1.73	2.89	2.89	2.89	---	4.86	10.40	10.77	0.95	2.85	3.02	3.65	A	
	35+35+35+35	2.60	2.60	2.60	2.60	---	4.55	10.40	10.75	0.89	2.86	3.03	3.64	A	
	35+35+35+42	2.48	2.48	2.48	2.96	---	4.75	10.40	10.76	0.92	2.86	3.02	3.64	A	
	35+35+35+50	2.35	2.35	2.35	3.35	---	4.97	10.40	10.89	0.95	2.76	2.98	3.77	A	
	35+35+42+42	2.36	2.36	2.84	2.84	---	4.94	10.40	10.77	0.98	2.85	3.02	3.65	A	
	20+20+20+20+20	2.08	2.08	2.08	2.08	2.08	3.42	10.40	11.10	0.58	2.62	2.89	3.97	A	
	20+20+20+20+25	1.98	1.98	1.98	1.98	2.48	3.56	10.40	11.10	0.60	2.62	2.89	3.97	A	
	20+20+20+20+35	1.81	1.81	1.81	1.81	3.16	3.84	10.40	11.11	0.67	2.61	2.89	3.98	A	
	20+20+20+20+42	1.70	1.70	1.70	1.70	3.60	4.04	10.40	11.11	0.69	2.61	2.89	3.98	A	
	20+20+20+20+50	1.60	1.60	1.60	1.60	4.00	4.27	10.40	11.24	0.71	2.51	2.90	4.14	A	
	20+20+20+20+60	1.49	1.49	1.49	1.49	4.44	4.55	10.40	11.47	0.72	2.38	2.81	4.37	A	
	20+20+20+20+71	1.38	1.38	1.38	1.38	4.88	4.86	10.40	11.50	0.79	2.36	2.79	4.41	A	
	20+20+20+25+25	1.90	1.90	1.90	2.35	2.35	3.70	10.40	11.10	0.62	2.62	2.89	3.97	A	
	20+20+20+25+35	1.73	1.73	1.73	2.17	3.04	3.99	10.40	11.11	0.69	2.61	2.89	3.98	A	
	20+20+20+25+42	1.64	1.64	1.64	2.05	3.43	4.18	10.40	11.11	0.71	2.61	2.89	3.98	A	
	20+20+20+25+50	1.54	1.54	1.54	1.93	3.85	4.41	10.40	11.24	0.74	2.51	2.90	4.14	A	
	20+20+20+25+60	1.43	1.43	1.43	1.80	4.31	4.69	10.40	11.47	0.74	2.38	2.81	4.37	A	
	20+20+20+25+71	1.33	1.33	1.33	1.67	4.74	5.00	10.40	11.50	0.82	2.36	2.79	4.41	A	
	20+20+20+35+35	1.90	1.90	1.90	2.35	2.35	3.70	10.40	11.10	0.62	2.62	2.89	3.97	A	
	20+20+20+35+42	1.52	1.52	1.52	2.66	3.18	4.46	10.40	11.12	0.79	2.55	2.89	4.08	A	

HEATING														
OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL
		A ROOM	B ROOM	C ROOM	D ROOM	E ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.		
SMXS90E	20+20+20+35+50	1.43	1.43	1.43	2.51	3.60	4.69	10.40	11.25	0.82	2.51	2.89	4.14	A
	20+20+20+35+60	1.34	1.34	1.34	2.35	4.03	4.97	10.40	11.48	0.82	2.37	2.80	4.39	A
	20+20+20+42+42	1.44	1.44	1.44	3.04	3.04	4.66	10.40	11.13	0.81	2.55	2.88	4.08	A
	20+20+20+42+50	1.37	1.37	1.37	2.87	3.42	4.89	10.40	11.26	0.84	2.56	2.95	4.06	A
	20+20+25+25+25	1.81	1.81	2.26	2.26	2.26	3.84	10.40	11.10	0.67	2.62	2.89	3.97	A
	20+20+25+25+35	1.66	1.66	2.08	2.08	2.92	4.13	10.40	11.11	0.71	2.61	2.89	3.98	A
	20+20+25+25+42	1.58	1.58	1.97	1.97	3.30	4.32	10.40	11.11	0.74	2.56	2.89	4.06	A
	20+20+25+25+50	1.49	1.49	1.86	1.86	3.70	4.55	10.40	11.24	0.76	2.51	2.90	4.14	A
	20+20+25+25+60	1.39	1.39	1.73	1.73	4.16	4.83	10.40	11.47	0.80	2.38	2.81	4.37	A
	20+20+25+35+35	1.54	1.54	1.92	2.70	2.70	4.41	10.40	11.11	0.76	2.61	2.89	3.98	A
	20+20+25+35+42	1.46	1.46	1.84	2.56	3.08	4.61	10.40	11.12	0.82	2.55	2.89	4.08	A
	20+20+25+35+50	1.39	1.39	1.72	2.43	3.47	4.83	10.40	11.25	0.84	2.51	2.89	4.14	A
	20+20+25+42+42	1.40	1.40	1.74	2.93	2.93	4.80	10.40	11.13	0.87	2.60	2.94	4.00	A
	20+20+35+35+35	1.44	1.44	2.52	2.50	2.50	4.69	10.40	11.12	0.84	2.61	2.89	3.98	A
	20+20+35+35+42	1.37	1.37	2.40	2.39	2.87	4.89	10.40	11.13	0.87	2.60	2.94	4.00	A
	20+25+25+25+25	1.72	2.17	2.17	2.17	3.99	10.40	11.10	0.69	2.62	2.89	3.97	A	
	20+25+25+25+35	1.60	2.00	2.00	2.00	2.80	4.27	10.40	11.11	0.74	2.61	2.89	3.98	A
	20+25+25+25+42	1.52	1.90	1.90	1.90	3.18	4.46	10.40	11.11	0.79	2.56	2.89	4.06	A
	20+25+25+25+50	1.44	1.79	1.79	1.79	3.59	4.69	10.40	11.24	0.82	2.51	2.90	4.14	A
	20+25+25+25+60	1.33	1.68	1.68	1.68	4.03	4.97	10.40	11.47	0.82	2.38	2.81	4.37	A
	20+25+25+35+35	1.48	1.86	1.86	2.60	2.60	4.55	10.40	11.11	0.82	2.61	2.89	3.98	A
	20+25+25+35+42	1.41	1.77	1.77	2.48	2.97	4.75	10.40	11.12	0.84	2.55	2.89	4.08	A
	20+25+25+35+50	1.34	1.68	1.68	2.35	3.35	4.97	10.40	11.25	0.87	2.51	2.89	4.14	A
	20+25+25+42+42	1.34	1.69	1.69	2.84	2.84	4.94	10.40	11.13	0.90	2.60	2.94	4.00	A
	20+25+35+35+35	1.38	1.73	2.43	2.43	2.43	4.83	10.40	11.12	0.87	2.61	2.89	3.98	A
	25+25+25+25+25	2.08	2.08	2.08	2.08	2.08	4.13	10.40	11.10	0.72	2.62	2.89	3.97	A
	25+25+25+25+35	1.93	1.93	1.93	1.93	2.68	4.41	10.40	11.11	0.77	2.61	2.89	3.98	A
	25+25+25+25+42	1.83	1.83	1.83	1.83	3.08	4.61	10.40	11.11	0.82	2.56	2.89	4.06	A
	25+25+25+25+50	1.73	1.73	1.73	1.73	3.48	4.83	10.40	11.24	0.85	2.51	2.90	4.14	A
	25+25+25+35+35	1.80	1.80	1.80	2.50	2.50	4.69	10.40	11.11	0.85	2.61	2.89	3.98	A
	25+25+25+35+42	1.71	1.71	1.71	2.40	2.87	4.89	10.40	11.12	0.87	2.61	2.89	3.98	A
	25+25+35+35+35	1.69	1.69	2.34	2.34	2.34	4.97	10.40	11.12	0.90	2.61	2.89	3.98	A



RMXS-E

Super Multi Plus Inverter Heat Pump



CONNECTABLE INDOOR UNITS

	20 class	25 class	35 class	42 class	50 class	60 class	71 class
Emura wall mounted unit	-	FTXG25J	FTXG35J	-	CTXG50J	-	-
Wall mounted unit	FTXS20G	FTXS25G	FTXS35G	FTXS42G	FTXS50G	FTXS60G	FTXS71G
Floor standing unit	-	FVXS25F	FVXS35F	-	FVXS50F	-	-
Flexi type unit	-	FLXS25B	FLXS35B	-	FLXS50B	FLXS60B	-
Slim concealed ceiling unit	-	FDXS25E	FDXS35E	-	FDXS50C	FDXS60C	-
Concealed ceiling unit	-	FDBQ25B	FBQ35C	-	FBQ50C	FBQ60C	-
4-way blow ceiling mounted cassette (600x600)	-	FFQ25BV	FFQ35BV	-	FFQ50BV	FFQ60BV	-
Round flow cassette	-	-	FCQ35C8	-	FCQ50C8	FCQ60C8	-
Ceiling suspended	-	-	FHQ35B	-	FHQ50B	FHQ60B	-



HEAT PUMP

Indoor Units	FTXG25JW	FTXG25JS	FTXG35JW	FTXG35JS
Dimensions	(Height x Width x Depth)	mm	295x915x155	
Weight	kg		11.0	
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.8 / 6.8 / 4.7 / 3.8
	Heating	H/M/L/SL	m³/min	9.6 / 7.9 / 6.2 / 5.4
Sound Power	Cooling	High	dBA	54.0
	Heating	High	dBA	55.0
Sound Pressure	Cooling	H/M/L/SL	dBA	38.0 / 32.0 / 25.0 / 22.0
	Heating	H/M/L/SL	dBA	39.0 / 34.0 / 28.0 / 25.0
Refrigerant	Type		R-410A	
Power Supply			1~220-240V/50Hz	



HEAT PUMP

Indoor Units	CTXG50JW	CTXG50JS		
Dimensions	(Height x Width x Depth)	mm		
Weight	kg	11.0		
Air Flow Rate	Cooling	H/M/L/SL	m³/min	10.5 / 8.7 / 6.9 / 5.9
	Heating	H/M/L/SL	m³/min	11.4 / 9.8 / 8.1 / 7.1
Sound Power	Cooling	High	dBA	64.0
	Heating	High	dBA	64.0
Sound Pressure	Cooling	H/M/L/SL	dBA	47.0 / 41.0 / 35.0 / 32.0
	Heating	H/M/L/SL	dBA	47.0 / 41.0 / 35.0 / 32.0
Refrigerant	Type	R-410A		
Power Supply		1~220-240V/50Hz		



HEAT PUMP									
Indoor Units			FTXS20G	FTXS25G	FTXS35G	FTXS42G	FTXS50G	FTXS60G	FTXS71G
Dimensions	(Height x Width x Depth)		mm	295x800x215			290x1050x250		
Weight		kg	9	9	10	10	10	12	12
Air Flow Rate	Cooling	H/M/L/SL	m³/min	9.4 / 7.4 / 5.5 / 4.0	9.1 / 7.1 / 5.2 / 3.7	10.4 / 7.7 / 4.8 / 3.5	9.1 / 7.7 / 6.3 / 5.4	10.2 / 8.6 / 7.0 / 6.0	16 / 13.8 / 11.3 / 10.1
	Heating	H/M/L/SL	m³/min	9.9 / 8.2 / 6.5 / 5.5	9.8 / 7.9 / 6.2 / 5.2	10.6 / 8.5 / 6.4 / 5.4	11.2 / 9.4 / 7.7 / 6.8	11.0 / 9.3 / 7.6 / 6.7	17.2 / 14.9 / 17.6 / 11.3
Sound Power	Cooling	High	dBA	54	54	58	58	59	61
	Heating	High	dBA	56	56	57	58	60	62
Sound Pressure	Cooling	H/L/SL	dBA	38 / 25 / 22	38 / 25 / 22	42 / 26 / 23	42 / 33 / 30	43 / 34 / 31	45 / 41 / 36 / 33
	Heating	H/L/SL	dBA	38 / 28 / 25	39 / 28 / 25	42 / 29 / 26	42 / 33 / 30	44 / 34 / 31	46 / 42 / 37 / 34
Refrigerant		Type		R-410A			1~220-230-240V/50Hz		
Power Supply							1~220-240V/50Hz		




HEAT PUMP									
Indoor Units			FLXS25B	FLXS35B	FLXS50B	FLXS60B			
Dimensions	(Height x Width x Depth)		mm	490x1050x200					
Weight		kg		16.0		17.0			
Air Flow Rate	Cooling	H/M/L/SL	m³/min	7.60 / 6.80 / 6.00 / 5.2	8.60 / 7.60 / 6.60 / 5.6	11.40 / 10.00 / 8.50 / 7.6	12.00 / 10.70 / 9.30 / 8.3		
	Heating	H/M/L/SL	m³/min	9.20 / 8.30 / 7.40 / 6.6	9.80 / 8.90 / 8.00 / 7.2	12.1 / 9.8 / 7.5 / 6.8	12.80 / 10.60 / 8.40 / 7.5		
Sound Power	Cooling	High	dBA	53.0	54.0	63.0	64.0		
	Heating	High	dBA	-	-	62.0	63.0		
Sound Pressure	Cooling	H/M/L/SL	dBA	37.0 / 34.0 / 31.0 / 28.0	38.0 / 35.0 / 32.0 / 29.0	47.0 / 43.0 / 39.0 / 36.0	48.0 / 45.0 / 41.0 / 39.0		
	Heating	H/M/L/SL	dBA	37.0 / 34.0 / 31.0 / 29.0	39.0 / 36.0 / 33.0 / 30.0	46.0 / 41.0 / 35.0 / 33.0	47.0 / 42.0 / 37.0 / 34.0		
Refrigerant		Type		R-410A			1~220-240/220-230V/50/60Hz		
Power Supply									




HEAT PUMP									
Indoor Units			FVXS25F	FVXS35F	FVXS50F				
Dimensions	(Height x Width x Depth)		mm	600x700x210					
Weight		kg		14					
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.2 / 6.5 / 4.8 / 4.1	8.5 / 6.7 / 4.9 / 4.5	10.7 / 9.2 / 7.8 / 6.6			
	Heating	H/M/L/SL	m³/min	8.8 / 6.9 / 5.0 / 4.4	9.4 / 7.3 / 5.2 / 4.7	11.8 / 10.1 / 8.5 / 7.1			
Sound Power	Cooling	High	dBA	54	55	56			
	Heating	High	dBA	54	55	57			
Sound Pressure	Cooling	H/M/L/SL	dBA	38 / 32 / 26 / 23	39 / 33 / 27 / 24	44 / 40 / 36 / 32			
	Heating	H/M/L/SL	dBA	38 / 32 / 26 / 23	39 / 33 / 27 / 24	45 / 40 / 36 / 32			
Refrigerant		Type		R-410A			1~220-240V/50Hz		
Power Supply									



HEAT PUMP									
Indoor Units			FDXS25E	FDXS35E					
Dimensions	(Height x Width x Depth)		mm	200x700x620					
Weight		kg		21.0					
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.7 / 8.0 / 7.3 / 6.2					
	Heating	H/M/L/SL	m³/min	8.7 / 8.0 / 7.3 / 6.2					
Sound Power	Cooling	High	dBA	53.0					
	Heating	High	dBA	53.0					
Sound Pressure	Cooling	H/M/L/SL	dBA	35.0 / 33.0 / 31.0 / 29.0					
	Heating	H/M/L/SL	dBA	35.0 / 33.0 / 31.0 / 29.0					
Refrigerant		Type		R-410A			1~220-240/220-230V/50/60Hz		
Power Supply									



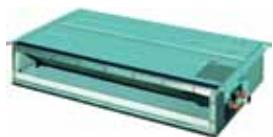

HEAT PUMP				
Indoor Units			FDXS50C	FDXS60C
Dimensions	(Height x Width x Depth)	mm	200x900x620	200x1100x620
Weight		kg	27.0	30.0
Air Flow Rate	Cooling	H/M/L/SL	m³/min	12.0 / 11.0 / 10.0 / 8.4
	Heating	H/M/L/SL	m³/min	12.0 / 11.0 / 10.0 / 8.4
Sound Power	Cooling	High	dBA	55.0
	Heating	High	dBA	55.0
Sound Pressure	Cooling	H/M/L/SL	dBA	37.0 / 35.0 / 33.0 / 31.0
	Heating	H/M/L/SL	dBA	37.0 / 35.0 / 33.0 / 31.0
Refrigerant		Type	R-410A	
Power Supply			220-240/220-230V/50/60Hz	



HEAT PUMP				
Indoor Units			FDBQ25B	
Dimensions	(Height x Width x Depth)	mm		230x652x502
Weight		kg		17.0
Air Flow Rate	Cooling	High/Low	m³/min	6.50 / 5.20
	Heating	High/Low	m³/min	6.95 / 5.20
Sound Power	Cooling	High/Low	dBA	55.0 / 49.0
	Heating	High/Low	dBA	55.0 / 49.0
Sound Pressure	Cooling	High/Low	dBA	35.0 / 28.0
	Heating	High/Low	dBA	35.0 / 29.0
Refrigerant		Type	R-410A	
Power Supply			1~/230V/50Hz	



HEAT PUMP					
Indoor Units			FBQ35C	FBQ50C	FBQ60C
Dimensions	(Height x Width x Depth)	mm	300x700x700		300x1000x700
Weight		kg	25		34
Air Flow Rate	Cooling	High/Low	m³/min	16 / 11	16 / 11
	Heating	High/Low	m³/min	16 / 11	16 / 11
Sound Power	Cooling	High	dBA	63	63
Sound Pressure	Cooling	High/Low	dBA	37 / 29	37 / 29
	Heating	High/Low	dBA	37 / 29	37 / 29
Refrigerant		Type	R-410A		
Power Supply			1~/230V/50Hz		



HEAT PUMP						
Indoor Units			FFQ25BV	FFQ35BV	FFQ50BV	FFQ60BV
Dimensions	(Height x Width x Depth)	mm		286x575x575		
Weight		kg		17.5		
Air Flow Rate	Cooling	High/Low	m³/min	9.0 / 6.5	10.0 / 6.5	12.0 / 8.0
	Heating	High/Low	m³/min	9.0 / 6.5	10.0 / 6.5	12.0 / 8.0
Sound Power	Cooling	High	dBA	46.5	49.0	53.0
Sound Pressure	Cooling	High/Low	dBA	29.5 / 24.5	32.0 / 25.0	36.0 / 27.0
	Heating	High/Low	dBA	29.5 / 24.5	32.0 / 25.0	36.0 / 27.0
Refrigerant		Type	R-410A			
Power Supply			1~/230V/50Hz			



HEAT PUMP			FCQ35C8	FCQ50C8	FCQ60C8
Indoor Units					
Dimensions	(Height x Width x Depth)	mm		204x840x840	
Weight		kg		19	
Air Flow Rate	Cooling	High/Low	m³/min	10.5 / 8.5	12.5 / 8.5
	Heating	High/Low	m³/min	12.5 / 10.0	12.5 / 8.5
Sound Power	Cooling	High	dBA	49	51
Sound Pressure	Cooling	High/Low	dBA	31 / 27	33 / 28
	Heating	High/Low	dBA	31 / 27	33 / 28
Refrigerant		Type		R-410A	
Power Supply				1~/220-240V/50/60Hz	



HEAT PUMP			FHQ35B	FHQ50B	FHQ60B
Indoor Units					
Dimensions	(Height x Width x Depth)	mm		195x960x680	195x1160x680
Weight		kg	24.0	25.0	27.0
Air Flow Rate	Cooling	High/Low	m³/min	13.0 / 10.0	17.0 / 13.0
	Heating	High/Low	m³/min	13.0 / 10.0	16.0 / 13.0
Sound Power	Cooling	High/Low	dBA	53.0 / 48.0	55.0 / 49.0
	Heating	High/Low	dBA	53.0 / 48.0	55.0 / 49.0
Sound Pressure	Cooling	High/Low	dBA	37.0 / 32.0	39.0 / 33.0
	Heating	High/Low	dBA	37.0 / 32.0	39.0 / 33.0
Refrigerant		Type		R-410A	
Power Supply				1~/220-240V/50Hz	



HEAT PUMP			INVERTER		
Outdoor Unit			RMXS112E8V1B	RMXS140E8V1B	RMXS160E8V1B
Dimensions	(Height x Width x Depth)	mm		1345x900x320	
Weight		kg		125	
Operation Range	Cooling	Min~Max	°CDB	-5~46	
	Heating	Min~Max	°CWB	-15~20	
Sound Power	Cooling	dBA	67	68	70
Sound Pressure	Cooling	dBA	51	52	54
	Heating	dBA	53	54	55
Sound Level (Night quiet)	Sound Pressure	dBA	47/44/41		47/44/41
Refrigerant		Type		R-410A	
Power Supply				1~/230V/50Hz	
Piping connections	Liquid (OD)/Gas/Drain	mm		9.52 / 19.1 / 26x3	
Max. internunit level difference		m		15	



BRANCH PROVIDER			BPMKS967B2	BPMKS967B3
Connectable indoor units			1~2	1~3
Max. indoor unit connectable capacity			14.2	20.8
Max. iconnectable combination			71+71	60+71+71
Dimensions	(HeightxWidthxDepth)	mm	180x294x350	
Weight	kg		7	8



VRV® III-S

VRV® III

VRV® -WII



OUTDOOR UNITS

Air-Cooled VRV®-Q

RQEQ-P / RQYQ-P

Replacement VRVIII Heat Pump / Heat Recovery

127

Air-Cooled VRV®

REYHQ8-24P
REYQ8-48P8/P9
BSV
RXYHQ12-36P8
RXYQ5-54P(A)/P8(A)
RXYSQ4-6PAV(Y)

VRVIII Heat Recovery – High COP

132

VRVIII Heat Recovery

133

Individual and Multi Branch Selector Boxes

135

VRVIII Heat Pump – High COP

136

VRVIII Heat Pump – Small Footprint

137

VRVIII-S Heat Pump

139

Water-Cooled VRV®

RWEYQ-P
RWEYQ-P
RWEYQ-PR

Heat Pump

140

Heat Recovery

141

Geothermal Application (Heat Pump & Heat Recovery)

142

INDOOR UNITS

1. Cassette units

FXFQ-P9
FXZQ-M9
FXCQ-M8
FKKQ-MA

144

145

146

147

2. Concealed ceiling units

FXDQ-M9
FXDQ-PB/NB
FXSQ-P
FXMQ-P
FXMQ-MA

148

149

150

151

152

3. Wall mounted units

FXAQ-P

153

4. Ceiling suspended units

FXHQ-MA
FXUQ-MA

154

155

5. Floor standing units

FXNQ-MA
FXLQ-P

156

157

6. Air curtains

CAV-DK


158

HOT WATER

Hot water module for VRV Heat Recovery

159

The simple switchover for R22 systems

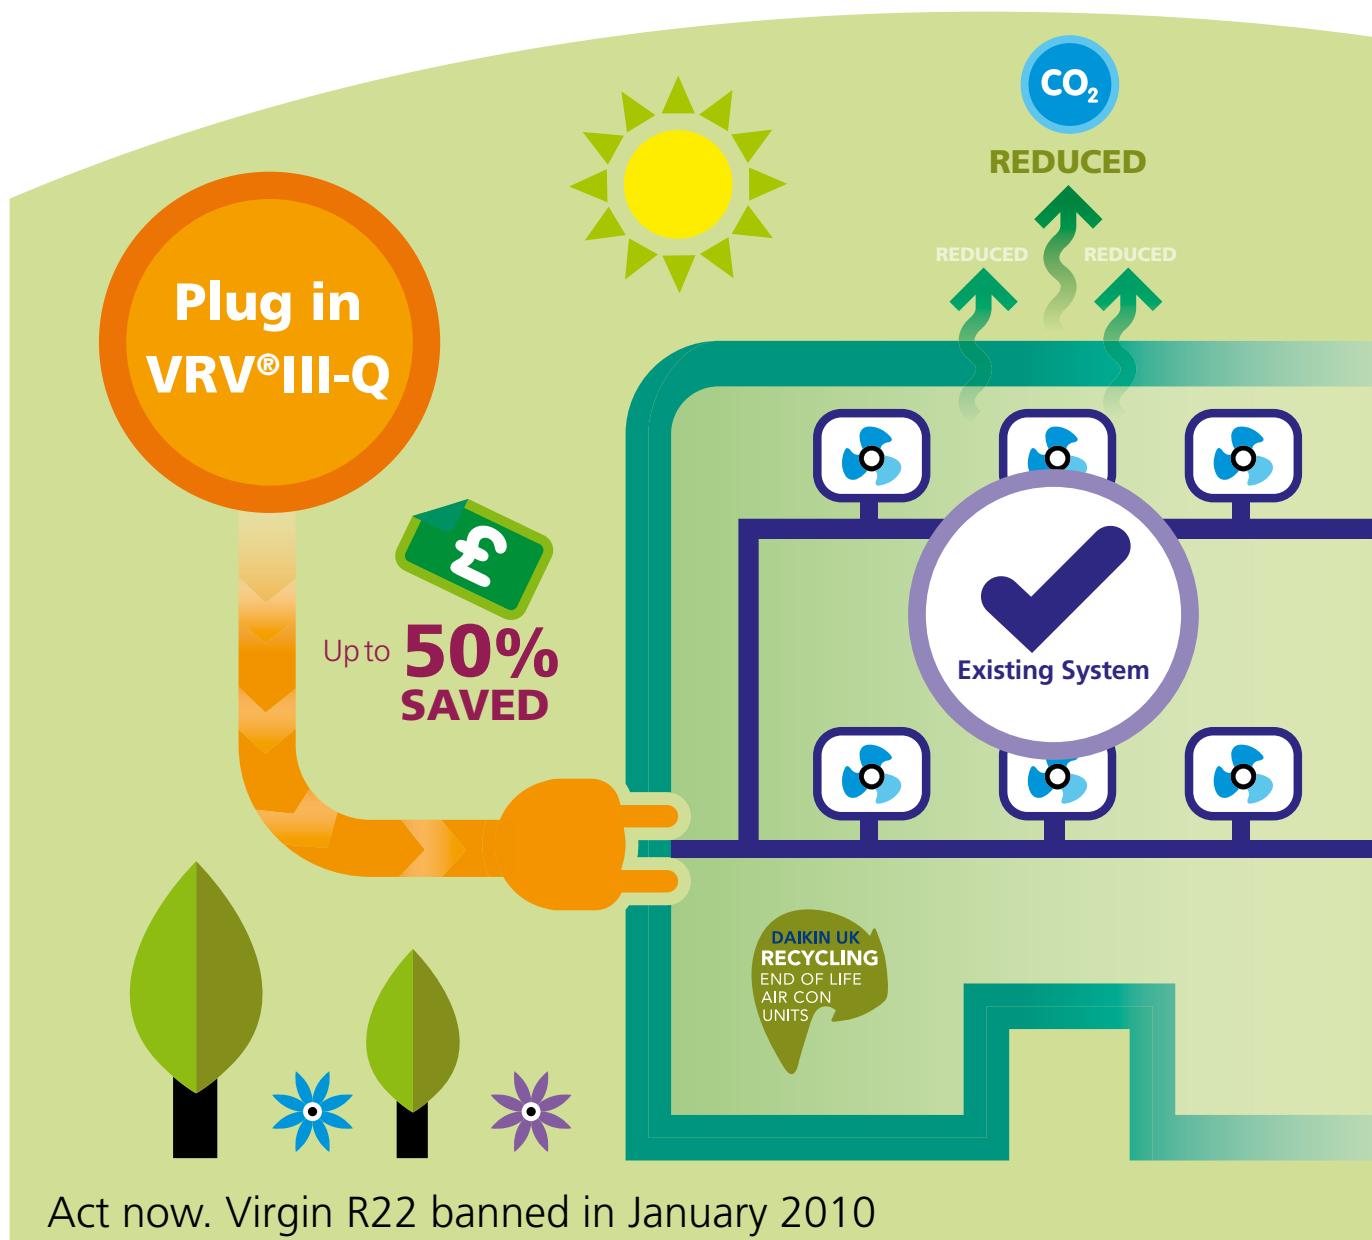

Save time and money, without compromising performance, when you replace existing R22 equipment.
VRV®III-Q is the smart way to achieve:

- Dramatically reduced installed cost – up to 50% saving compared with complete new system.
- Ability to reuse all existing pipework and possibility to reuse existing fan coils.
- Flexibility to use with existing pipework connected to other non-Daikin systems.
- Automatic pipework cleaning function.
- Higher energy efficiency and lower CO₂ emissions than retrofitting refrigerant.
- Major potential to increase system capacity.

For more information, visit www.daikin.co.uk/r22r

your comfort. our world.

Midlands Region Northern Region North London Central London South London Scotland Region Western Region
0845 641 9370 0845 641 9340 0845 641 9360 0845 641 9350 0845 641 9355 0845 641 9330 0845 641 9320


 DAIKIN

REPLACEMENT VRV®

The Daikin solution
to R-22 phase out

What is R-22 and why is it phased-out?

R-22 is a hydrochlorofluorocarbon (HCFC) which was commonly used in air conditioning systems. When R-22 is released into the air, the ultraviolet rays of the sun cause it to decompose and chlorine is released in the stratosphere. Chlorine reacts with ozone, reducing the amount of the ozone. Due to ozone layer depletion, harmful ultraviolet rays reach the surface of the earth giving rise to a number of health and environmental issues. The international community therefore, signed the Montreal Protocol to phase out ozone depletion materials by 2030. The European Union however, decided to ban R-22 already in 2015.

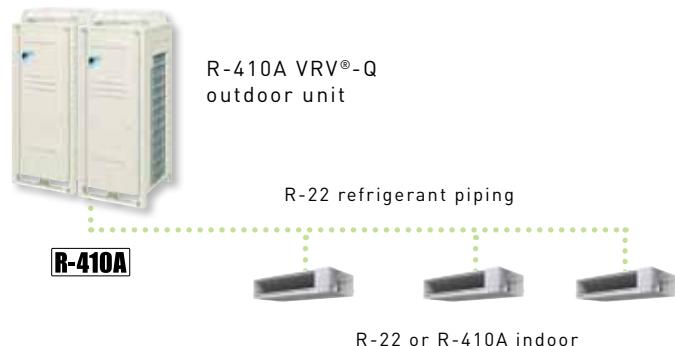


- > All units older than the K-Series must be replaced.
- > For heat recovery applications, the BS-boxes need to be replaced.

Technologies of VRV®-Q

Reduced pressure


As R-22 VRV® systems work on a lower pressure than R-410A systems; thus the copper refrigerant piping was also designed for these lower pressures. Therefore the Replacement VRV® (VRV®-Q) must operate at lower pressures than the standard VRV®III series. However thanks to the sub cool circuit a high efficiency level can be kept even with the lower pressures.

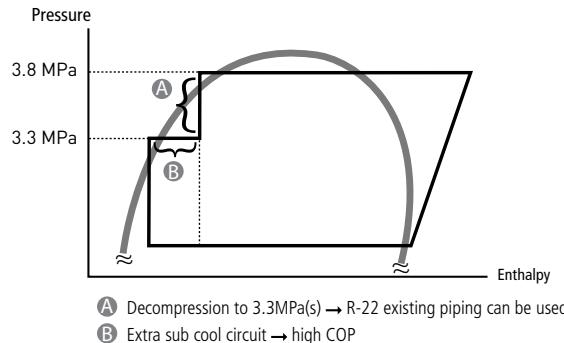

Refrigerant pipe cleaning

When replacing an air conditioning system, the piping is normally replaced as well since traces of old refrigerant and oil mixed with the oil and refrigerant of the new system can cause the equipment to malfunction.

In order to allow re-use of existing R-22 piping with an R-410A system Daikin developed a technology to capture and retain the contamination left in the refrigerant piping. During the charging of the system, R-410A refrigerant starts circulating through the copper piping collecting the contamination left in the refrigerant piping. The refrigerant including the remaining oil from the R-22 system is filtered in the outdoor unit and the contamination is deposited in the outdoor unit. This process is executed only once and takes about 1 hour (depending on system characteristics). Daikin is the first manufacturer in the industry to develop this combination of automatic charging and refrigerant pipe cleaning function.

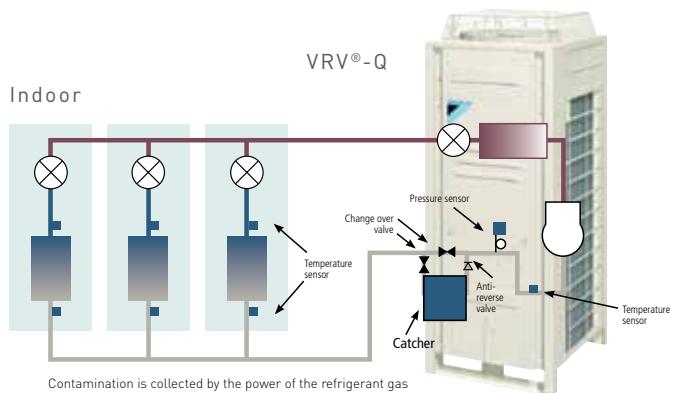

Features of VRV®-Q

Warranty

Unlike using drop in refrigerants, the VRV®-Q condensing unit is provided with a manufacturers warranty, providing the existing pipework condition is deemed suitable for re-use.

Fast installation

It is not necessary to remove the existing piping and even the indoor units can remain (depending on type of indoor unit). The unit automatically charges the refrigerant and cleans the refrigerant piping. This unique Daikin feature makes the installation time even shorter.

Limited and planned-downtime

As the refrigerant piping can be maintained the installation is less intrusive and less time consuming than for a completely new system. Moreover, downtime can be carefully planned: whereas if a problem occurs when not enough reclaimed R-22 is available, a long and unplanned downtime can be the result.

Limited and phased investment cost


It is possible to spread the various stages of replacement over a certain period of time because the indoor units can remain in many cases. The air conditioning replacement therefore, can be incorporated in the general refurbishment schedule of the building and the investment cost can be spread. A further reduction in installation cost can be achieved by maintaining the old refrigerant copper pipe work.

No restrictions on system history

As a result of the combined automatic charging and refrigerant pipe cleaning function, it is possible to ensure a clean piping network.

Possibility to increase capacity

Cooling loads often increase subsequent to the initial installation of the air conditioning system. The Replacement VRV® (VRV®-Q) enables system capacity to be increased without changing the refrigerant piping (depending on system characteristics). For example: It is possible to install a 16 HP Replacement VRV® on the refrigerant piping of an R-22 10 HP system.

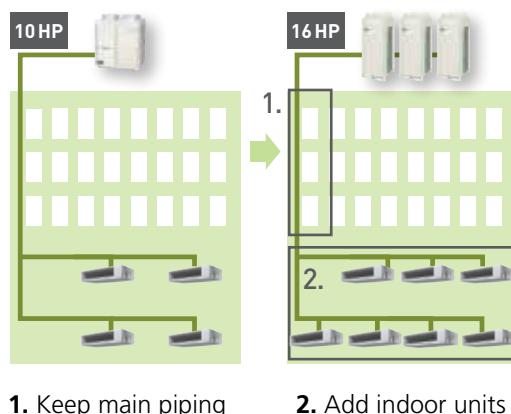


Environmental awareness

R-410A not only has a zero ozone depletion potential, it is also proven to be more energy efficient than R-22.

High efficiency

Upgrading an old R-22 system to a Replacement VRV® system will result in increased system efficiency. Efficiency gains of more than 40% can be realised, by virtue of technological developments in heat pump technology and the more efficient R-410A refrigerant. Increased energy efficiency equals lower energy consumption, subsequent lower energy costs and lower CO₂ emissions.

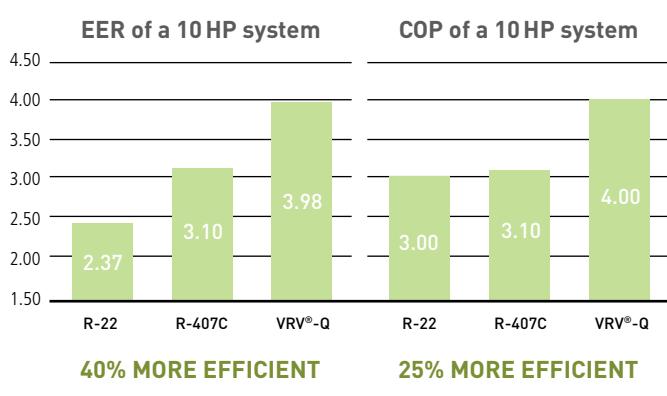

R-22: RSXY10KA7
R-407C: RSXPY10L7
R-410A: RQYQ280P

Specifications

Heat Recovery

			RQCEQ-P									
			280	360	460	500	540	636	712	744	816	848
Outdoor unit modules			RQEQQ140P	2		2	1			1	1	
			RQRQ180P		2	1	2	3		2	1	1
			RQEQQ212P					3	1	2	3	4
Capacity range			HP	10	13	16	18	20	22	24	26	28
Capacity	cooling	nom.	kW	28.0	36.0	45.0	50.0	54.0	63.6	71.2	74.4	81.6
	heating	nom.	kW	32.0	40.0	52.0	56.0	60.0	67.2	78.4	80.8	87.2
Power input	cooling	nom.	kW	7.04	10.3	12.2	13.9	15.5	21.9	21.2	23.3	27.1
	heating	nom.	kW	8.00	10.7	13.4	14.7	16.1	17.7	20.7	21.2	23.1
EER	cooling			3.98	3.48	3.77	3.61	3.48	2.90	3.36	3.19	3.01
COP	heating			4.00	3.72	3.89	3.80	3.72	3.79	3.80	3.81	3.77
Max n° of indoor units to be connected				16	20	26	29	33	36	40	43	47
Indoor index connection	minimum			125	162.5	200	225	250	275	300	325	350
	standard			250	325	400	450	500	550	600	650	700
	maximum			325	422.5	520	585	650	715	780	845	910
Dimensions	unit	height	mm						1680			
		width	mm	635+ 635			635+ 635+ 635			635+ 635+ 635+ 635		
		depth	mm						765			
Weight		kg		175+ 175		175+ 175+175			179+ 179+179	175+175 +175+179	175+175 +179+179	175+179+ 179+179
Sound pressure	cooling	nom.	dBA	57	61	61	62	63	64	63	64	65
	type								Propeller			
Fan	air flow rate (nominal at 230V)	cooling	m³/min	95+ 95	110+110	95+ 95 + 110	95+ 110+110	110+ 110 + 110	95+ 110+ 110+ 110	110+ 110+ 110+ 110		
	external static pressure (max.)		Pa					78				
Compressor	motor	type							Hermetically sealed scroll compressor			
Operation range	cooling	min. - max.	°CDB						-5~43			
	heating	min. - max.	°CWB						-20~15.5			
Refrigerant	type								R-410A			
	charge	kg		10.3+ 10.3	10.6+ 10.6	10.3+10.3 +10.6	10.3+10.6 +10.6	10.6+10.6 +10.6	11.2+11.2 +11.2	10.3+10.6 +10.6+11.2	10.3+10.6 +11.2+11.2	10.6+11.2 +11.2+11.2
	control								Electronic expansion valve			
Piping connections	liquid	mm	9.52	12.7		15.9			19.1			
	gas	mm	22.2	25.4		28.6			34.9			
	discharge gas	mm	19.1	22.2		25.4			28.6			
	pressure equiliser tube	mm	-	-	-	-	-	-	-	-	-	-
	max. total length	m						300				
	max. length between level difference	OU-IU	m					120 (actual length)				
Power Supply								50 (outdoor unit in highest position)				
								3~. 400V. 50Hz				

Notes:

Nominal cooling capacities are based on : indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 7.5m, level difference: 0m.

Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping : 7.5m, level difference : 0m

Accessories

VRV®III-Q - REPLACEMENT VRV® - Heat recovery			RQCEQ280PY1 RQCEQ360PY1	RQCEQ460PY1 RQCEQ500PY1	RQCEQ540PY1 RQCEQ636PY1	RQCEQ712PY1 RQCEQ744PY1 RQCEQ816PY1 RQCEQ848PY1
Fixing box				KJB111A		
Outdoor unit multi connection piping kit			BHFP26P36C	BHFP26P63C		BHFP26P84C

Heating & Cooling

			RQYQ-P		RQCYQ-P					RQYP-A				
			140	180	280	360	460	500	540	615	680	730	785	850
Outdoor unit modules	RQYQ140P		1		2		2	1						
	RQYQ180P			1		2	1	2	3					
	RQYP280A									1	1	1		
	RQYP335A									1			1	
	RQYP400A										1			1
	RQYP450A										1	1	1	
Capacity range		HP	5	6.5	10	13	16	18	20	22	24	26	28	30
Capacity	cooling	nom.	kW	14.0	18.0	28.0	36.0	46.0	50.0	54.0	61.5	68.0	73.0	78.5
	heating	nom.	kW	16.0	20.0	32.0	40.0	52.0	56.0	60.0	69.0	76.5	81.5	87.5
Power input	cooling	nom.	kW	3.52	5.17	7.04	10.3	12.2	13.9	15.5	17.7	19.2	21.2	23.7
	heating	nom.	kW	4.00	5.37	8.00	10.7	13.4	14.7	16.1	18.8	20.8	22.2	23.8
EER	cooling			3.98	3.48	3.98	3.48	3.77	3.61	3.48	3.47	3.54	3.44	3.31
COP	heating			4.00	3.72	4.00	3.72	3.89	3.80	3.72	3.67	3.68	3.67	3.68
Max n° of indoor units to be connected				8	10	16	20	26	29	33	36	40	43	46
Indoor index connection	minimum			62.5	81.25	125	162.5	200	225	250	275	300	325	350
	standard				125	162.5	250	325	400	450	500	550	600	700
	maximum				162.5	211.25	325	422.5	520	585	650	715	780	910
Dimensions	unit	height	mm							1680				
		width	mm		635		635+ 635		635+ 635+ 635	930+ 930		930+1,240		1,240+1,240
		depth	mm							765				
Weight		kg		175		175+ 175		175+175+175		292+292		292+384		384+384
Sound pressure		nom.	dBA	54	58	57	61	62	63		62		63	
Fan	type									Propeller				
	air flow rate (nominal at 230V)	cooling	m³/min	95	110	95+ 95	110+110	95+ 95+110	95+ 110+110	110+110	185+200	185+233	185+233	200+233
	external static pressure (max.)		Pa							78				
Compressor	motor	type								Hermetically sealed scroll compressor				
Operation range	cooling	min. - max.	°CDB							-5~43				
	heating	min. - max.	°CWB							-20~15.5				
Refrigerant	type									R-410A				
	charge	kg		11.1		11.1+ 11.1		11.1+11.1+11.1		20.9+19.5	27.1+19.5	27.4+19.5	27.4+20.9	27.4+27.1
	control									Electronic expansion valve				
Piping connections	liquid	mm		9.52		12.7		15.9						19.1
	gas	mm		15.9	19.1	22.2	25.4		28.6					31.8
	max. total length		m						300					
	max. length between	OU-IU	m						120 (actual length)					
	level difference	OU-IU	m						50 (outdoor unit in highest position)					
Power Supply									3~, 400V, 50Hz					


Notes:

Nominal cooling capacities are based on : indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 7.5m, level difference: 0m. Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping : 7.5m, level difference : 0m

Accessories

VRV®III-Q - REPLACEMENT VRV® - Heat pump	RQYQ140PY1	RQYQ180PY1	RQCYQ280PY1 RQCYQ360PY1	RQCYQ460PY1 RQCYQ500PY1	RQCYQ540PY1
Cool / Heat selector			KRC19-26A		
Fixing box			KJB111A		
Outdoor unit multi connection piping kit	-	-	BHFP22P36C		BHFP22P54C

Achieve the highest energy efficiency levels in the industry

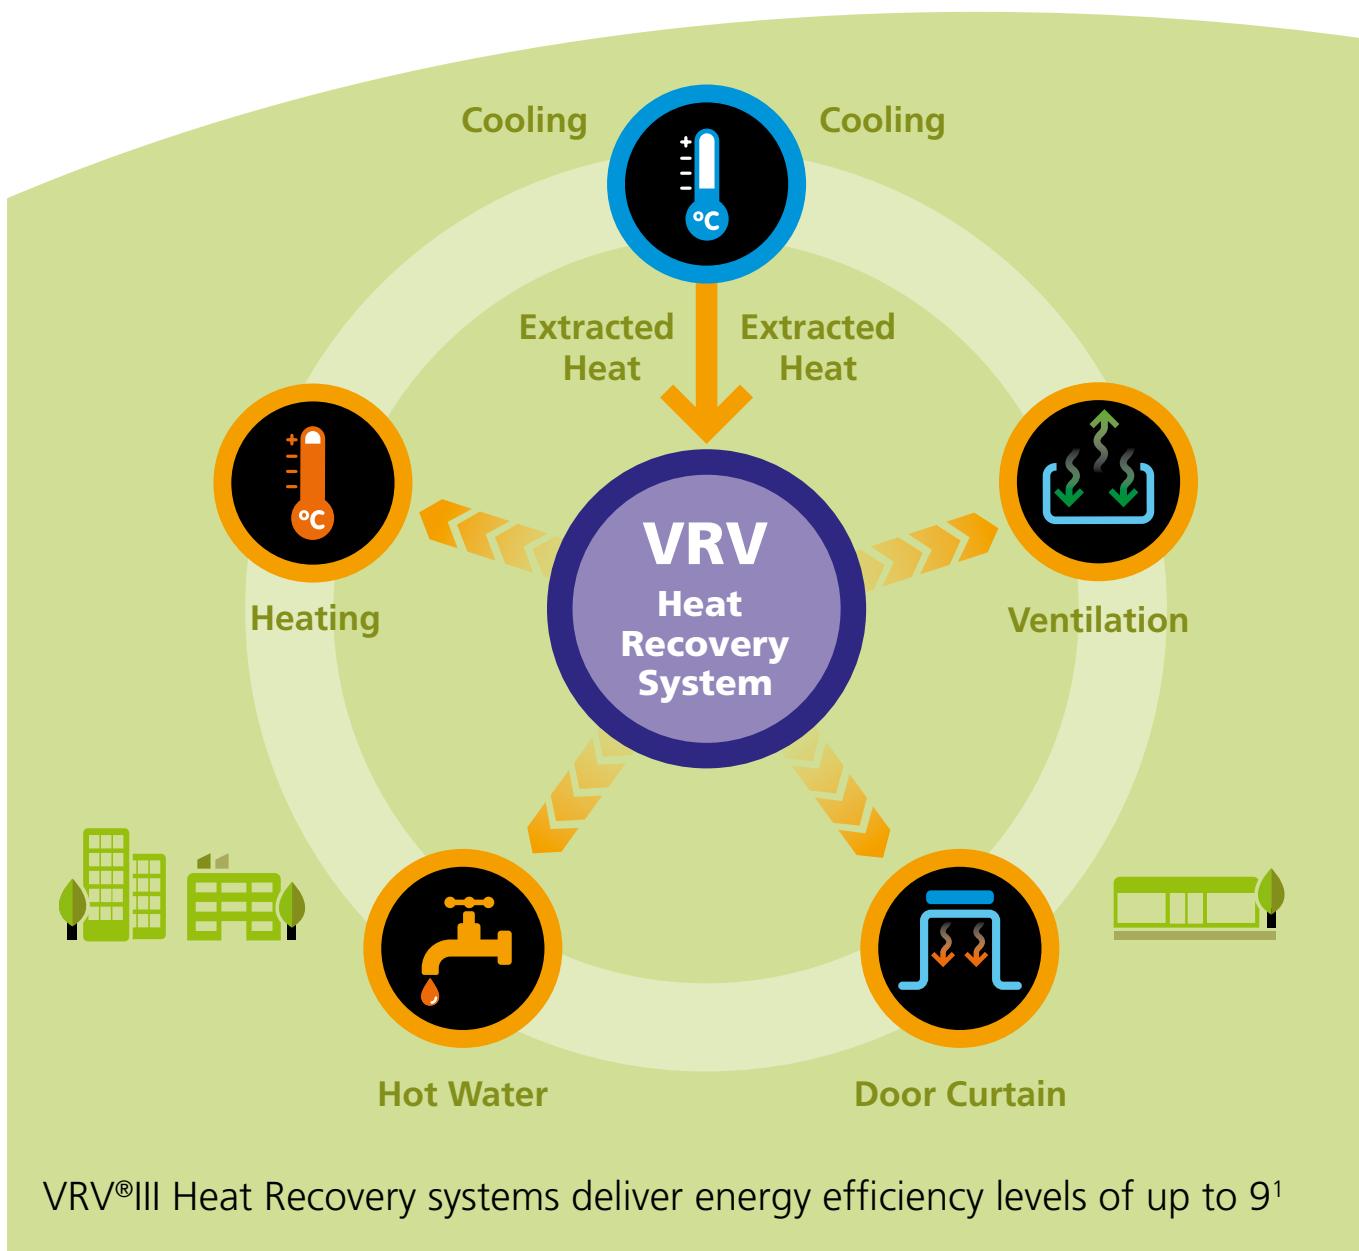

VRV®III Heat Recovery systems deliver energy efficiency levels of up to 9¹

VRV®III Heat Recovery is the all-in-one solution to maximise energy efficiency.

A fully integrated system for heating, cooling, air curtains and hot water – to help achieve zero waste heat.

- Free extracted heat from areas being cooled is diverted to areas requiring heat – to minimise operating costs.
- Reclaimed heat can be used to power door air curtains and even hot water supplies.
- Numerous heat recovery options, with 14 different types of indoor units available.
- Suitable for all size of systems: a single outdoor unit (11kW to 170kW) can connect up to 64 indoor units.

For more information please visit www.daikin.co.uk/heat-recovery

your comfort. our world.

Midlands Region	Northern Region	North London	Central London	South London	Scotland Region	Western Region
0845 641 9370	0845 641 9340	0845 641 9360	0845 641 9350	0845 641 9355	0845 641 9330	0845 641 9320



¹ REYQ8P8 model at 50% cooling – 50% heating load in conditions: outdoor temperature 11° CDB, indoor temperature: 18° CWB, 22°CDB

REY(H)Q8-24P


VRV®III Inverter Heat Recovery High COP Combination



- Heat Recovery operation can provide energy efficiency levels in excess of 9.0
- Top energy efficiency in Daikin heat recovery range, with high rate of ECA qualification
- Wide range of indoor units: 13 different models in a total of 75 variations
- Continuous heating during defrost (resulting in a higher integrated heating capacity)
- Easy installation thanks to automatic refrigerant charging operation, automatic test operation
- Increased piping flexibility: maximum piping length: 165m, increased total piping length: 1,000m
- The ability to control each conditioned zone keeps VRV®III system running costs to an absolute minimum
- Only those areas calling for air conditioning need to be cooled or heated and the system can be shut down completely in unoccupied rooms
- Quick cool/heat change over
- Improved refrigerant containment check
- Extra low noise during night time operation (step 1: 50 dBA; step 2: 45 dBA)
- Possibility to extend the operation range in cooling down to -20°C



REYHQ24P

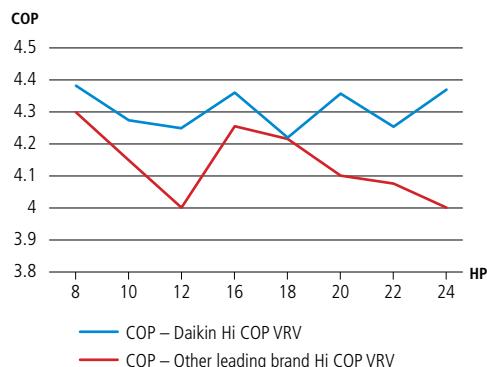

HEAT RECOVERY																	
Outdoor Units			8	10	12	16	18	20	22	24							
Independent unit	Outdoor Unit		REYQ8P8	REYQ10P8	REYQ12P8	REMQ8P9	REMQ8P9	REMQ8P9	REMQ10P8	REMHQ12P8							
	Outdoor Unit		REYQ8P8	REYQ10P8	REYQ12P8	REMQ8P9Y1B	REMQ10P9	REMQ12P9	REMHQ12P8	REMHQ12P8							
Capacity range		HP	8	10	12	16	18	20	22	24							
Capacity	Cooling	kW	22.4	28.0	33.5	45.0	50.4	56.0	61.5	67.0							
	Heating	kW	25.0	31.5	37.5	50.0	56.5	62.5	69.0	75.0							
Power Input (Nominal)	Cooling	kW	5.20	7.09	8.72	10.5	12.7	13.9	16.0	17.2							
	Heating	kW	5.71	7.38	8.84	11.5	13.4	14.3	16.3	17.2							
EER	Cooling		4.31	3.95	3.84	4.29	3.98	4.04	3.84	3.89							
COP	Heating		4.38	4.27	4.24	4.36	4.22	4.36	4.24	4.37							
Dimensions	(Height x Width x Depth)		mm			1,680 x 1,300 x 765			-								
Weight	Unit	kg				331			-								
Sound Level	Sound Power	Cooling	dBA	78	78	80	82	81	85	85							
	Sound Pressure	Cooling	dBA	58	58	60	62	61	64	66							
Operation Range	Cooling	Min~Max	°CDB	-5.0~43.0													
	Heating	Min~Max	°CWB	-20.0~15.0													
Refrigerant	R-410A																
Power Supply	3~/380-415V/50Hz																
Piping connections	Liquid (OD)	mm				12.7				15.9							
	Gas	mm							28.6	34.9							
	Max total length	m							1000								
Max n° of indoor units to be connected						26				39							
						32				35							




REYQ8-48P8/P9

VRV®III Heat Recovery Compact Combination

- Increased EER/COP thanks to the redesigned 8 and 12HP stand alone units and 8HP modular unit
- Its operation range for example 8hp to 48hp in 2hp increment steps (21 system combinations), is wider than any of its contemporaries.
- Its ability to run no less than 64 indoor units in heat recovery format cannot at present be matched by other comparable systems.
- Continuous heating during defrost (resulting in a higher integrated heating capacity).
- Easy installation thanks to automatic refrigerant charging operation, automatic test operation
- Increased piping flexibility: maximum piping length: 165m, increased total piping length: 1,000m
- The ability to control each conditioned zone keeps VRV®III system running costs to an absolute minimum.
- Only those areas calling for air conditioning need to be cooled or heated and the system can be shut down completely in unoccupied rooms.
- Quick cool/heat change over.
- Improved refrigerant containment check function
- Flexible combination of outdoor units: Small footprint combination, high COP combination or any other combination of your choice



REYQ46-48P8Y1B

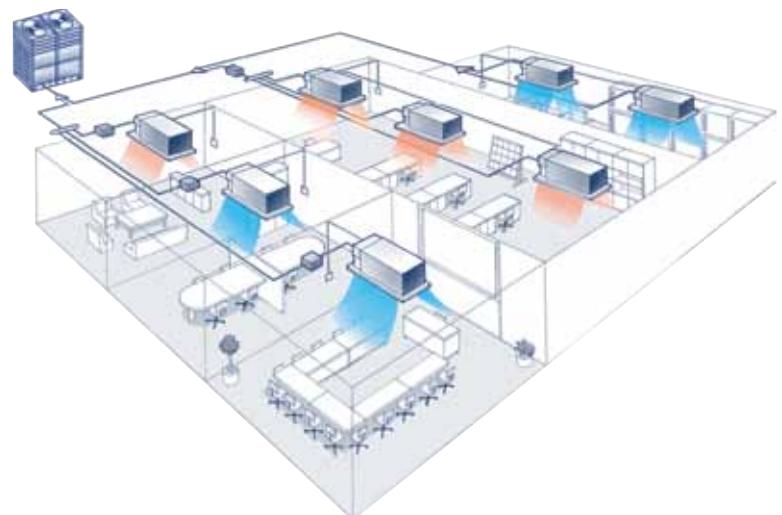

REYQ-P8		8	10	12	14	16	18	20	22	24	26	28
Stand alone units	REYQ8P9	1										
	REYQ10P8		1									
	REYQ12P9			1								
	REYQ14P8				1							
	REYQ16P8					1						
Modular units	REMQ8P9						1	1				
	REMQ10P8						1		1			1
	REMQ12P8							1	1	2		1
	REMQ14P8										1	1
	REMQ16P8										2	2
	Number of outdoor units	1	1	1	1	1	2	2	2	2	2	2

REYQ-P8		30	32	34	36	38	40	42	44	46	48
Stand alone units	REYQ8P9										
	REYQ10P8										
	REYQ12P9										
	REYQ14P8										
	REYQ16P8										
Modular units	REMQ8P9				1	1					
	REMQ10P8				1		1				
	REMQ12P8					1	1	2			
	REMQ14P8	1								1	
	REMQ16P8	1	2	1	1	1	1	2	2	2	3
	Number of outdoor units	2	2	3	3	3	3	3	3	3	3



REYQ8-48P8/P9

VRV® III Heat Recovery

HEAT RECOVERY								
REYQ-P8			8	10	12	14	16	
Capacity range		HP	8	10	12	14	16	
Capacity	Cooling	kW	22.4	28.0	33.5	40.0	45.0	
	Heating	kW	25.0	31.5	37.5	45.0	50.0	
Power Input (Nominal)	Cooling	kW	5.20	7.09	8.72	11.4	14.1	
	Heating	kW	5.71	7.38	8.84	11.0	12.8	
EER			4.31	3.95	3.84	3.51	3.19	
COP			4.38	4.27	4.24	4.09	3.91	
Dimensions	(Height x Width x Depth)		mm	1,680x1,300x765				
Weight		kg		331			339	
Sound Level	Sound Power	Cooling	dBA	78	78	80	83	84
	Sound Pressure	Cooling	dBA	58	58	60	62	63
Operation Range	Cooling	Min~Max	°CDD		-5~43			
	Heating	Min~Max	°CWB		-20~15			
Refrigerant				R-410A				
Power Supply				3~/380-415V/50Hz				
Max n° of indoor units to be connected				-				
Piping connections	Liquid (OD)/Gas	mm	952 / 19.1	952 / 22.2			12.7 / 28.6	
Max Total Length		m			1000			

HEAT RECOVERY										
REYQ-P8			18	20	22	24	26	28	30	32
Capacity range		HP	18	20	22	24	26	28	30	32
Capacity	Cooling	kW	50.4	55.9	61.5	67.0	73.0	78.5	85.0	90.0
	Heating	kW	56.5	62.5	69.0	75.0	81.5	87.5	95.0	100.0
Power Input (Nominal)	Cooling	kW	12.7	14.9	17.0	19.2	21.6	23.8	26.6	28.4
	Heating	kW	13.4	15.2	17.1	18.9	20.6	22.3	24.2	25.8
EER			3.98	3.76	3.62	3.49	3.38	3.30	3.20	3.17
COP			4.22	4.11	4.04	3.97	3.96	3.92	3.93	3.88
Dimensions	(Height x Width x Depth)		mm	1,680x930 + 930x765			1,680x930 + 1,240x765		1,680x1,240 + 1,240x765	
Weight		kg		204 + 254		254 + 254		254 + 334		334 + 334
Sound Level	Sound Power	Cooling	dBA	81	83	83	83	83	83	83
	Sound Pressure	Cooling	dBA	61	62	63	63	63	63	63
Operation Range	Cooling	Min~Max	°CDD		-5~43					
	Heating	Min~Max	°CWB		-20~15					
Refrigerant				R-410A						
Power Supply				3~/380-415V/50Hz						
Max n° of indoor units to be connected				-						
Piping connections	Liquid (OD)/Gas	mm		15.9 / 28.6		15.9 / 34.9			19.1 / 34.9	
Max Total Length		m			1000					

HEAT RECOVERY										
REYQ-P8			34	36	38	40	42	44	46	48
Capacity range		HP	34	36	38	40	42	44	46	48
Capacity	Cooling	kW	95.4	101.0	107.0	112.0	118.0	124.0	130.0	135.0
	Heating	kW	107.0	113.0	119.0	125.0	132.0	138.0	145.0	150.0
Power Input (Nominal)	Cooling	kW	26.9	29.1	31.2	33.4	35.8	38.0	40.8	42.6
	Heating	kW	26.3	28.1	30.0	31.8	33.5	35.2	37.1	38.7
EER			3.55	3.47	3.43	3.35	3.30	3.26	3.19	3.17
COP			4.07	4.02	3.97	3.93	3.94	3.92	3.91	3.88
Dimensions	(Height x Width x Depth)		mm	1,680x930 + 930 + 1,240x765			1,680x930 + 1,240 + 1,240x765		1,680x1,240 + 1,240 + 1,240x765	
Weight		kg		204 + 254 + 334		254 + 254 + 334		254 + 334 + 334		334 + 334 + 334
Sound Level	Sound Power	Cooling	dBA	84	85	85	85	85	85	85
	Sound Pressure	Cooling	dBA	64	64	65	65	65	65	65
Operation Range	Cooling	Min~Max	°CDD		-5~43					
	Heating	Min~Max	°CWB		-20~15					
Refrigerant				R-410A						
Power Supply				3~/380-415V/50Hz						
Max n° of indoor units to be connected				-						
Piping connections	Liquid (OD)/Gas	mm	19.1 / 34.9			19.1 / 41.3				
Max Total Length		m			1000					

BSVQ-P8

Individual Branch Selector for VRV® Heat Recovery

- High comfort levels: individual control and change over of 1 group of indoor units
- Maximum design flexibility because individual and multi boxes can be combined in one system
- Low built-in height
- No drain piping needed
- Allows multi tenant applications (option PCB required)



BSVQ100P8

			BSVQ100P8	BSVQ160P8	BSVQ250P8
Maximum capacity index of connectable indoor units			20 < x ≤ 100	100 < x ≤ 160	160 < x ≤ 250
Maximum number of connectable indoor units			5	8	
Power input	Cooling	kW		0.005	
	Heating	kW		0.005	
Dimensions	(Height x Width x Depth)	mm		207 x 388 x 326	
Weight		kg	14		15
Piping connections	Outdoor unit	Liquid / gas / discharge gas	Type Ø mm	Brazing connection 9.52 / 15.9 / 12.7	9.52 / 22.2 / 19.1
	Indoor unit	Liquid / gas	Type Ø mm	Brazing connection 9.52 / 15.9	9.52 / 22.2
Power Supply				1~/220-240V/50Hz	

BSV4/6Q-PV

Multi Branch Selector for VRV® Heat Recovery

- Rapid installation resulting from less brazing points and wiring
- High comfort levels: individual control and change over of up to 4 or 6 groups of indoor units
- Maximum design flexibility because individual and multi boxes can be combined in one system
- Low built-in height
- No drain piping needed



BSV4Q100PV

			BSV4Q100PV	BSV6Q 100PV
Maximum capacity index of connectable indoor units			400	600
Maximum capacity index of connectable indoor units per branch				100
Number of branches			4	6
Maximum number of connectable indoor units			20	30
Maximum number of connectable indoor units per branch				5
Power input	Cooling	kW	0.020	0.030
	Heating	kW	0.020	0.030
Dimensions	(Height x Width x Depth)	mm	209 x 1,053 x 635	209 x 1,577 x 635
Weight		kg	60	89
Piping connections	Outdoor unit	Liquid / gas / discharge gas	Type Ø mm	Brazing connection 12.7 x 28.6 x 19.1
	Indoor unit	Liquid / gas	Type Ø mm	Brazing connection 9.5 / 15.9
Power Supply				1~/220-240V/50Hz




RXYHQ12-36P8

VRV®III Inverter Heat Pump High COP Combination



- Top energy efficiency in Daikin heat pump range, thanks to the redesigned 8HP unit and newly developed 12HP high COP unit
- Wide range of indoor units: 13 different models in a total of 75 variations
- Compact size of outdoor units
- Increased external static pressure: up to 78.4Pa
- 2 steps in night quiet mode: eg. 10HP: 58 dBA, 1st step: 54dBA, 2nd step: 45dBA
- RoHS compliant
- Easy combination with HRV
- Connectable to current Daikin control systems: DS-net, Intelligent Touch Controller, Intelligent Manager, BACnet Gateway, DMS-IF
- Easy installation thanks to automatic refrigerant charging operation, automatic test operation
- Refrigerant containment check function

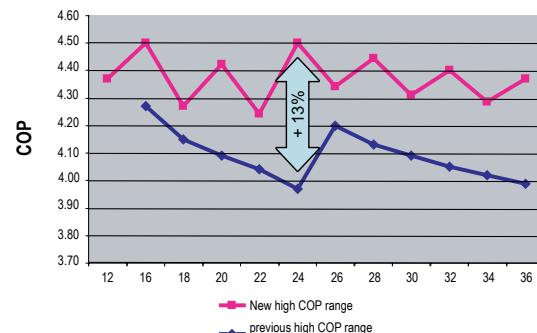

RXYQ-P8		12	16	18	20	22	24	26	28	30	32	34	36
Modules	new⇒ RXYQ8P8W1B		2	1	1		3	2	1	1	1	1	
	RXYQ10P7W1B			1		1		1	2	1		1	
	new⇒ RXYHQ12P8W1B	1			1	1				1	2	2	3


HEAT PUMP														
Outdoor Units			12	16	18	20	22	24	26	28	30	32	34	36
Capacity range	HP		12	16	18	20	22	24	26	28	30	32	34	36
Capacity	Cooling	kW	33.5	44.8	50.4	56.0	61.5	67.2	72.8	78.4	84.0	89.4	95.0	101.0
Power input (nominal)	Heating	kW	37.5	50.0	56.5	63.0	69.0	75.0	81.5	88.0	94.5	100.0	107.0	113.0
Cooling	kW	8.6	10.4	12.6	13.8	16.0	15.7	17.8	19.0	21.2	22.4	24.7	25.9	
Heating	kW	8.6	11.1	13.2	14.3	16.3	16.7	18.8	19.8	21.9	22.7	24.9	25.9	
EER		3.89	4.29	4.00	4.05	3.84	4.29	4.09	4.12	3.96	3.99	3.85	3.89	
COP		4.37	4.50	4.27	4.42	4.24	4.50	4.34	4.44	4.31	4.40	4.79	4.37	
Dimensions	(Height x Width x Depth)	mm	1680x1240x765											
Sound Level	Sound Power	Cooling	dBA	80	82	82	83	83	83	83	83	85	85	
	Sound Pressure	Cooling	dBA	60	60	61	62	62	62	62	63	64	64	
Operation Range	Cooling	Min~Max	°CDB							-5.0~43.0				
	Heating	Min~Max	°CWB							-20.0~15.0				
Refrigerant										R-410A				
Power Supply										3N~400V/50Hz				
Max n° of indoor units to be connected		19	26	29	32	35	39	42	45	48	52	55	58	
Piping connections	Liquid (OD)/Gas	mm	12.7 / 28.6	12.7 / 28.6		15.9 / 28.6		15.9 / 34.9			19.1 / 34.9		19.1 / 41.3	
Max total length	m									1000				



RXYQ5-54P(A)/P8(A)

VRV®III Inverter Heat Pump Small Footprint Combination

- Increased EER/COP thanks to the redesigned 8HP unit
- Outdoor unit capacity up to 54 HP
- Wide range of indoor units: 13 different models in a total of 75 variations
- Flexible combination of outdoor units: small footprint combination, high COP combination or any other combination of your choice
- Compact size of outdoor units
- Increased external static pressure: up to 78.4Pa
- 2 steps in night quiet mode: eg. 10HP: 58 dBA, 1st step: 54dBA, 2nd step: 45dBA
- RoHS compliant
- Easy combination with HRV
- Connectable to current Daikin control systems: DS-net, Intelligent Touch Controller, Intelligent Manager, BACnet Gateway, DMS-IF
- Easy installation thanks to automatic refrigerant charging operation, automatic test operation
- Refrigerant containment check function

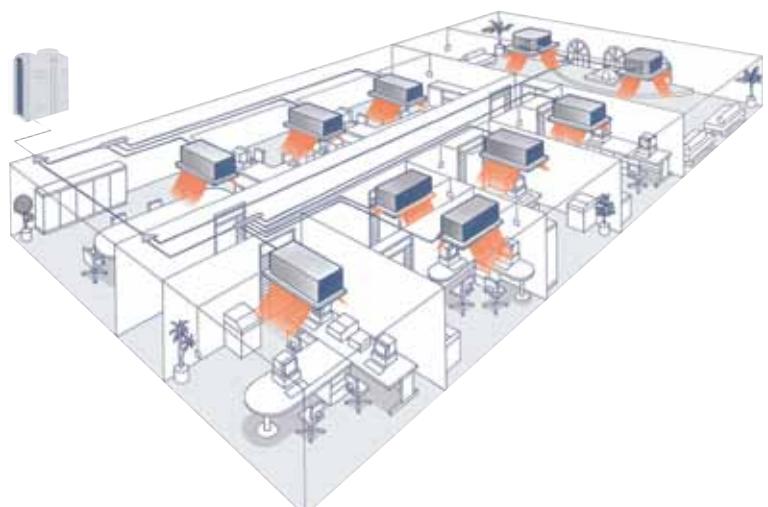

RXYQ-P(A)/P8(A)	5	8	10	12	14	16	18	20	22	24	26	28	30
RXYQ5P7W1B	1												
RXYQ8P8W1B		1						1			1		
RXYQ10P7W1B			1							1		1	
RXYQ12P7W1B				1				1	1	2			1
RXYQ14P7W1BA					1								
RXYQ16P7W1BA						1							
RXYQ18P7W1BA							1				1	1	1

new::

RXYQ-P(A)/P8(A)	32	34	36	38	40	42	44	46	48	50	52	54
RXYQ5P7W1B												
RXYQ8P8W1B				1			1					
RXYQ10P7W1B					1			1				
RXYQ12P7W1B						1						
RXYQ14P7W1BA	1										1	
RXYQ16P7W1BA		1										1
RXYQ18P7W1BA	1	1	2	1	1	1	2	2	2	2	2	3



RXYQ5-54P(A)/P8(A)

VRV® III Inverter Heat Pump Small Footprint Combination

HEAT PUMP										
Outdoor Units			5	8	10	12	14	16	18	
Capacity range		HP	5	8	10	12	14	16	18	
Capacity	Cooling	kW	14.0	22.4	28.0	33.5	40.0	45.0	49.0	
	Heating	kW	16.0	25.0	31.5	37.5	45.0	50.0	56.5	
Power input (nominal)	Cooling	kW	3.52	5.22	7.42	9.62	12.4	14.2	16.2	
	Heating	kW	4.00	5.56	7.70	9.44	11.30	12.90	15.30	
EER			3.98	4.29	3.77	3.48	3.23	3.17	3.02	
COP			4.00	4.50	4.09	3.97	3.98	3.88	3.69	
Dimensions	(Height x Width x Depth)		mm	1,680x635x765	1,680x930x765			1,680x1,240x765		
Weight		kg	159	187	240		316		324	
Sound Level	Sound Power	Cooling	dBA	72	78		80		83	
	Sound Pressure	Cooling	dBA	54	57	58		60		63
Operation Range	Cooling	Min~Max	CDB		-5.0~43.0					
	Heating	Min~Max	CWD		-20.0~15.0					
Refrigerant					R-410A					
Power Supply					3N~/400V/50Hz					
Max n° of indoor units to be connected				8	13	16	19	23	26	29
Piping connections	Liquid (OD)/Gas	mm		9.52 / 15.9	9.52 / 19.1	9.52 / 22.2		12.7 / 28.6		15.9 / 28.6
Max. total length		m			1000					

HEAT PUMP											
Outdoor Units			20	22	24	26	28	30	32	34	36
Capacity range		HP	20	22	24	26	28	30	32	34	36
Capacity	Cooling	kW	55.9	61.5	67.0	71.4	77.0	82.5	89.0	94.0	98.0
	Heating	kW	62.5	69.0	75.0	81.5	88.0	94.0	102.0	107.0	113.0
Power input (nominal)	Cooling	kW	14.7	17.0	19.2	20.9	23.6	25.8	28.6	30.4	32.4
	Heating	kW	14.9	17.1	18.9	20.7	23.0	24.7	26.6	28.2	30.6
EER			3.80	3.62	3.49	3.41	3.26	3.20	3.11	3.09	3.02
COP			4.18	4.04	3.97	3.94	3.83	3.81	3.83	3.79	3.69
Dimensions	(Height x Width x Depth)		mm		-						
Weight		kg			-						
Sound Level	Sound Power	Cooling	dBA	83	83	83	85	85	85	85	86
	Sound Pressure	Cooling	dBA	62	63	63	64	65	65	65	66
Operation Range	Cooling	Min~Max	CDB		-5.0~43.0						
	Heating	Min~Max	CWD		-20.0~15.0						
Refrigerant					R-410A						
Power Supply					3N~/400V/50Hz						
Max n° of indoor units to be connected				32	35	39	42	45	49	52	55
Piping connections	Liquid (OD)/Gas	mm		15.9 / 28.6	15.9 / 34.9		19.1 / 34.9		19.1 / 41.3		
Max. total length		m			1000						

HEAT PUMP											
Outdoor Units			38	40	42	44	46	48	50	52	54
Capacity range		HP	38	40	42	44	46	48	50	52	54
Capacity	Cooling	kW	105.0	111.0	116.0	120.0	126.0	132.0	138.0	143.0	147.0
	Heating	kW	119.0	126.0	132.0	138.0	145.0	151.0	158.0	163.0	170.0
Power input (nominal)	Cooling	kW	30.6	33.2	35.4	36.9	39.8	42.0	44.8	46.6	48.6
	Heating	kW	30.1	32.4	34.2	35.9	38.3	40.0	41.9	43.5	45.9
EER			3.43	3.34	3.28	3.25	3.17	3.14	3.08	3.07	3.02
COP			3.95	3.89	3.86	3.84	3.79	3.78	3.77	3.75	3.70
Dimensions	(Height x Width x Depth)		mm		-						
Weight		kg			-						
Sound Level	Sound Power	Cooling	dBA	86	86	86	87	87	87	87	88
	Sound Pressure	Cooling	dBA	66	66	66	67	67	67	67	68
Operation Range	Cooling	Min~Max	CDB		-5.0~43.0						
	Heating	Min~Max	CWD		-20.0~15.0						
Refrigerant					R-410A						
Power Supply					3N~/400V/50Hz						
Max n° of indoor units to be connected				61			64				
Piping connections	Liquid (OD)/Gas	mm			19.1/41.3						
Max. total length		m			1000						



RXYSQ4-6PA7V(Y)1B

VRV® III-S Inverter Heat Pump



- High COP values
- Easy installation thanks to automatic refrigerant charging operation, automatic test operation
- Wide range of indoor units
- Power consumption limit setting
- Small capacities - 4, 5 & 6HP
- Slim & flexible design
- Space saving outdoor unit

RXYSQ4-5-6PA7V(Y)1B

HEAT PUMP					
Outdoor Unit (Single Phase)			RXYSQ4PA7V1B	RXYSQ5PA7V1B	RXYSQ6PA7V1B
Capacity range	HP		4	5	6
Capacity	Cooling	kW	11.2	14.0	15.5
	Heating	kW	12.5	16.0	18.0
Power Input (Nominal)	Cooling	kW	2.81	3.51	4.53
	Heating	kW	2.74	3.86	4.57
EER			3.99	3.99	3.42
COP			4.56	4.15	3.94
Dimensions	(Height x Width x Depth)		mm	1,345x900x320	
Weight		kg		120	
Sound Level	Sound Power	Cooling	dBA	66	67
	Sound Pressure	Cooling	dBA	50	51
		Heating	dBA	52	53
Operation Range	Cooling	Min~Max	°CDB	-5~46	
	Heating	Min~Max	°CWB	-20~15.5	
Refrigerant				R-410A	
Power Supply				1N~/220-240V/50Hz	
Max n° of indoor units to be connected			6	8	9
Piping connections	Liquid (OD)/Gas/Drain	mm	9.52 / 15.9 / 26 x 3		9.52 / 19.1 / 26 x 3
Max total length	m		300		

HEAT PUMP					
Outdoor Unit (Three Phase)			RXYSQ4PA7Y1B	RXYSQ5PA7Y1B	RXYSQ6PA7Y1B
Capacity range	HP		4	5	6
Capacity	Cooling	kW	11.2	14.0	15.5
	Heating	kW	12.5	16.0	18.0
Power Input (Nominal)	Cooling	kW	2.89	3.61	4.65
	Heating	kW	2.82	3.97	4.69
EER			3.88	3.88	3.33
COP			4.43	4.03	3.83
Dimensions	(Height x Width x Depth)		mm	1,345x900x320	
Weight		kg		120	
Sound Level	Sound Power	Cooling	dBA	66	67
	Sound Pressure	Cooling	dBA	50	51
		Heating	dBA	52	53
Operation Range	Cooling	Min~Max	°CDB	-5~46	
	Heating	Min~Max	°CWB	-20~15.5	
Refrigerant				R-410A	
Power Supply				3N~/380-415V/50Hz	
Max n° of indoor units to be connected			6	8	9
Piping connections	Liquid (OD)/Gas/Drain	mm	9.52 / 15.9 / 26 x 3		9.52 / 19.1 / 26 x 3
Max total length	m		300		




RWEYQ8-30P

Water Cooled VRV® Heat Pump



- Wide condensing unit range: 10, 20 & 30HP via 1 single refrigerant circuit
- High COP values: 5.21 nominal value
- Up to 32 indoor units connectable to a 30HP condensing unit
- Wide range of indoor units: 13 different models in a total of 75 variations
- Compact design 1000mm (H) x 780mm (W) x 550mm (D)
- Operation range (inlet water temperature): 10-45°C
- Connectable to current Daikin control systems: DS-net, Intelligent Touch Controller, Intelligent Manager, BACnet Gateway, DMS-IF
- Flexible piping length

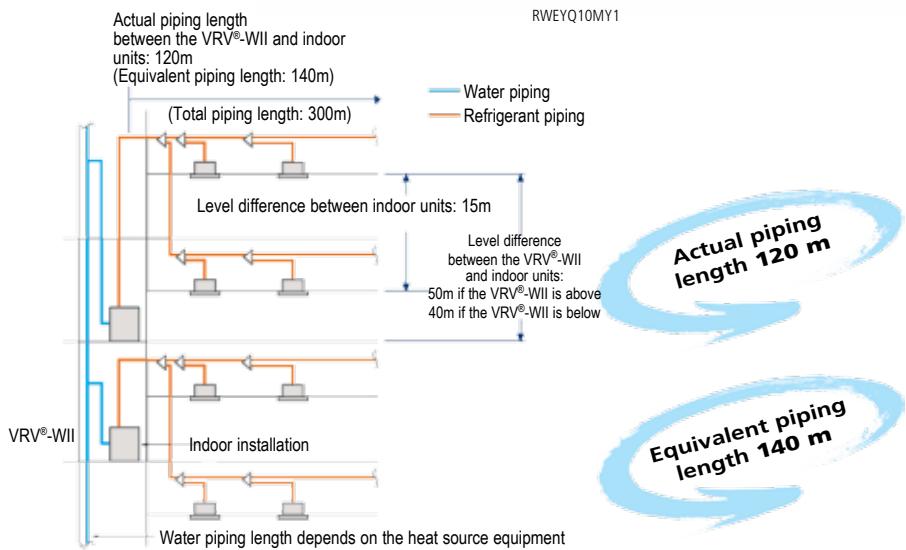

RWEYQ-P		8	10	16	18	20	24	26	28	30
Modules	RWEYQ8P	1		2	1		3	2	1	
	RWEYQ10P		1		1	2		1	2	3

HEAT PUMP												
Outdoor Units				8	10	16	18	20	24	26	28	30
Capacity	Cooling	kW	22.4	26.7	44.8	49.1	53.4	67.2	71.5	75.8	80.1	
	Heating	kW	25.0	31.5	50.0	56.5	63.0	75.0	81.5	88.0	94.5	
Power Input (Nominal)	Cooling	kW	4.55	6.03	9.10	10.6	12.1	13.7	15.1	16.6	18.1	
	Heating	kW	4.24	6.05	8.48	10.3	12.1	12.7	14.5	16.3	18.2	
EER			4.92	4.43	4.92	4.63	4.41	4.91	4.74	4.57	4.43	
COP			5.90	5.21	5.90	5.49	5.21	5.91	5.62	5.40	5.19	
Dimensions	Unit	Height	mm				1,000					
		Width	mm		780		780+780			780+780+780		
		Depth	mm				550					
Weight	Unit	kg	149	150	149+149	150+149	150+150	149+149+149	150+149+149	150+150+149	150+150+150	
Sound Pressure (Nominal)	Cooling	dBA	50	51	53	54		55			56	
Inlet Water Temperature	Cooling	Min~Max °C					10~45					
	Heating	Min~Max °C					10~45					
Refrigerant							R-410A					
Power Supply							3~/400V/50Hz					
Piping connections	Liquid (OD)	mm	9.52	12.7		15.9			19.1			
	Gas	mm				-						
	Discharge gas	mm	19.1	22.2		28.6			34.9			
	Max total length	m				300						
Max n° of indoor units to be connected				13	16	26	29	32	36	36	36	





RWEYQ8-30P

Water Cooled VRV® Heat Recovery

- Wide condensing unit range: 10, 20 & 30HP via 1 single refrigerant circuit
- High COP values: 5.21 nominal value
- Up to 32 indoor units connectable to a 30HP condensing unit
- Wide range of indoor units: 13 different models in a total of 75 variations
- Compact design 1000mm (H) x 780mm (W) x 550mm (D)
- Operation range (inlet water temperature): 10-45°C
- Connectable to current Daikin control systems: DS-net, Intelligent Touch Controller, Intelligent Manager, BACnet Gateway, DMS-IF
- Flexible piping length



RWEYQ10MY1

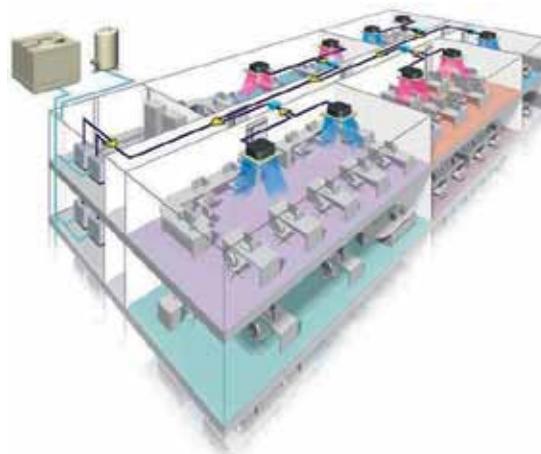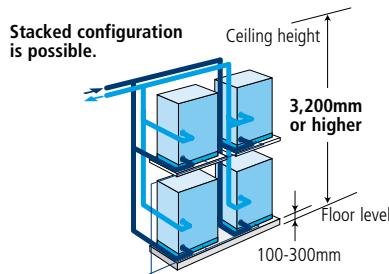

RWEYQ-P		8	10	16	18	20	24	26	28	30
Modules	RWEYQ8P	1		2	1		3	2	1	
	RWEYQ10P		1		1	2		1	2	3

HEAT RECOVERY				8	10	16	18	20	24	26	28	30
Outdoor Units												
Capacity	Cooling	kW		22.4	26.7	44.8	49.1	53.4	67.2	71.5	75.8	80.1
	Heating	kW		25.0	31.5	50.0	56.5	63.0	75.0	81.5	88.0	94.5
Power Input (Nominal)	Cooling	kW		4.55	6.03	9.10	10.6	12.1	13.7	15.1	16.6	18.1
	Heating	kW		4.24	6.05	8.48	10.3	12.1	12.7	14.5	16.3	18.2
EER				4.92	4.43	4.92	4.63	4.41	4.91	4.74	4.57	4.43
COP				5.90	5.21	5.90	5.49	5.21	5.91	5.62	5.40	5.19
Dimensions	Unit	Height	mm					1,000				
		Width	mm			780		780+780		780+780+780		
		Depth	mm					550				
Weight	Unit	kg		149	150	149+149	150+149	150+150	149+149+149	150+149+149	150+150+149	150+150+150
Sound Pressure (Nominal)	Cooling	dBA		50	51	53		54		55		56
Inlet Water Temperature	Cooling	Min~Max °C						10~45				
	Heating	Min~Max °C							10~45			
Refrigerant								R-410A				
Power Supply								3~/400V/50Hz				
Piping connections	Liquid (OD)	mm		9.52		12.7		15.9		19.1		
	Gas	mm		19.1	22.2		28.6			34.9		
	Discharge gas	mm		15.9	19.1		22.2			28.6		
	Max total length	m						300				
Max n° of indoor units to be connected				13	16	26	29	32	36	36	36	36



INVERTER

RWEYQ-PR

Geothermal application VRV®III Water Cooled Inverter Heat Pump

- Heating with ground sourced water as a renewable energy source!
 - Groundwater remains at a relatively constant temperature during the year
 - Superior efficiency remains even at extreme outdoor temperatures
 - Uses renewable energy: ground water, water from a lake, water from rivers,...
- Extension of the operation range down to -10°C in heating
 - Add ethylene glycol to the water when the water inlet temperature is lower than 5°C
 - No multi combinations possible
 - Heat Pump and Heat Recovery systems



RWEYQ10PR



HEAT PUMP AND HEAT RECOVERY			
Outdoor Units		8	10
Independent Unit		RWEYQ8PY1R	RWEYQ10PY1R
Capacity		22.4	26.7
Heating		25.0	31.5
Dimensions		1,000 780 550	
Unit		Height mm Width mm Depth mm	
Weight		149	150
Sound Pressure (Nominal)		50 dBA	51
Inlet Water Temperature		Cooling °C Heating °C	10~45 -10~45
Refrigerant			
Power Supply			
Piping connections		Liquid (OD) mm Gas HP / HR mm Discharge gas HP / HR mm Max total length m	3~/400V/50Hz 9.52 / 9.52 - / 19.1 19.1 / 15.9 300
Max n° of indoor units to be connected		13	16



FXFQ-P9

Round Flow Cassette



- Modern style decoration panel in pure white with grey louvres. Also available in white with white louvres
- 360° air discharge ensures uniform air flow and temperature distribution
- Air discharge from the corners avoids dead zones that may be subject to temperature differences
- Comfortable horizontal air discharge ensures draughtfree operation and prevents ceiling soiling
- 23 different air flow patterns possible
- Allows multi tenant applications (option PCB required)



BRC1E51



BRC1D52




BRC7F532




FXFQ-P8

- Fresh air intake: standard knockout and optional kit
- Reduced installation height: 214mm for class 20-63
- Drain-up pump with 850 mm lift fitted as standard

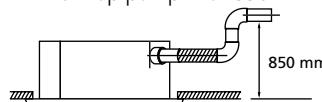

- Optional daily Self-cleaning filter available.

Examples of air flow patterns possible

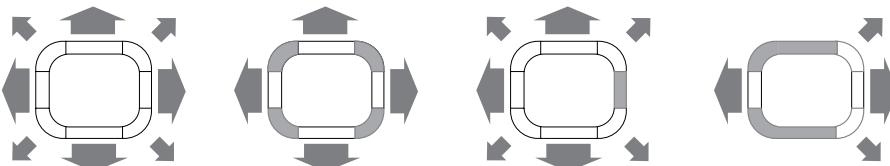

FXFQ-P9																						
Indoor Units			20	25	32	40	50	63	80	100	125											
Capacity	Cooling	kW	2.20	2.80	3.60	4.50	5.60	7.10	9.00	11.20	14.00											
	Heating	kW	2.50	3.20	4.00	5.00	6.30	8.00	10.00	12.50	16.00											
Power input	Cooling	kW		0.053		0.063	0.083	0.095	0.120	0.173	0.258											
	Heating	kW			0.045	0.055	0.067	0.114	0.108	0.176	0.246											
Dimensions	(Height x Width x Depth)	mm	204x840x840					246x840x840			288x840x840											
Weight	kg		20			21			24		26											
Air Flow Rate	Cooling	High/Low	m³/min	12.5 / 9.0		13.5 / 9.0	15.5 / 10.0	16.5 / 11.0	23.5 / 14.5	26.5 / 17.0	33.0 / 20.0											
	Heating	High/Low	m³/min	12.5 / 9.0		13.5 / 9.0	15.0 / 9.5	17.5 / 12.0	23.5 / 14.5	28.0 / 17.5	33.0 / 20.0											
Sound power (nominal)	Cooling		dBA	49.0		50.0	51.0	52.0	55.0	58.0	61.0											
Sound Pressure	Cooling	High/Low	dBA	31.0 / 28.0		32.0 / 28.0	33.0 / 28.0	34.0 / 29.0	38.0 / 32.0	41.0 / 33.0	44.0 / 34.0											
	Heating	High/Low	dBA	31.0 / 28.0		32.0 / 28.0	33.0 / 28.0	36.0 / 30.0	38.0 / 32.0	42.0 / 34.0	44.0 / 34.0											
Refrigerant	R-410A																					
Power Supply	1~/220-240V/50Hz																					
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm	6.40 / 12.7 / 32					9.5 / 15.9 / 32														
Decoration Panel	Model	BYCQ140CW1 / BYCQ140CW1W																				
	Colour	White panel (RAL9010) with grey louvres / White panel (RAL9010) with white louvres																				
	HeightxWidthxDepth	mm	50x950x950																			
	Weight	kg	5.5																			



FXZQ-M9

4-Way Blow Ceiling Mounted Cassette (600mm x 600mm)



BRC1E51



BRC1D52



BRC7E530




FXZQ-M9

- Extremely compact casing (575mm in width and depth) enables unit to fit flush into ceilings and match standard architectural modules, without cutting ceiling tiles
- Modern style decoration panel in white (RAL9010)
- Low noise operation: down to 25 dBA sound pressure level
- Excellent low draught characteristics
- Vertical auto-swing function moves the discharge flaps up and down for efficient air distribution throughout the room
- Since the flaps can move to a 0 degree position, virtually no draught can be experienced




Examples of air flow patterns possible


2-way blow



4-way blow



3-way blow

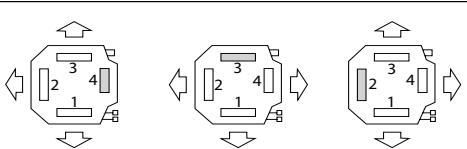

FXZQ-M9							
Indoor Units			20	25	32	40	50
Capacity	Cooling	kW	2.20	2.80	3.60	4.50	5.60
	Heating	kW	2.50	3.20	4.00	5.00	6.30
Power input	Cooling	kW		0.073	0.076	0.089	0.115
	Heating	kW		0.064	0.068	0.080	0.107
Dimensions	(Height x Width x Depth)		286x575x575				
Weight	kg		18				
Air Flow Rate	Cooling	High/Low	m³/min	9.00 / 7.00	9.50 / 7.50	11.00 / 8.00	14.00 / 10.00
Sound power (nominal)	Cooling		dBA	47.0	49.0	53.0	58.0
Sound Pressure	Cooling	High/Low	dBA	30.0 / 25.0	32.0 / 26.0	36.0 / 28.0	41.0 / 33.0
Refrigerant	R-410A						
Power Supply	1~/220-240V/50Hz						
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm	6.4 / 12.7 / 32				
Decoration Panel	Model		BYFQ60B7W1				
	Colour		White (Ral 9010)				
	HeightxWidthxDepth	mm	55x700x700				
	Weight	kg	2.7				



FXCQ-M8

2-Way Blow Ceiling Mounted Cassette



BRC1E51



BRC1D52




BRC7C62



FXCQ20,25,32M8

- Compact dimensions, can easily be mounted in a ceiling void of only 355mm



- Auto-swing function ensures efficient air and temperature distribution and prevents ceiling soiling,
- Drain up pump with 600mm lift fitted as standard
- Leaves maximum floor and wall space for furniture, decorations and fittings
- Easy to clean flat suction grille

FXCQ-M8										
Indoor Units			20	25	32	40	50	63	80	125
Capacity	Cooling	kW	2.20	2.80	3.60	4.50	5.60	7.10	9.00	14.00
	Heating	kW	2.50	3.20	4.00	5.00	6.30	8.00	10.00	16.00
Power input	Cooling	kW	0.077		0.092		0.130		0.161	0.209
	Heating	kW	0.044		0.059		0.097		0.126	0.176
Dimensions	(Height x Width x Depth)	mm	305x780x600			305x995x600			305x1,180x600	
Weight	kg		26			31	32	35	47	48
Air Flow Rate	Cooling	High/Low	m³/min	7.0 / 5.0	9.0 / 6.5		12.0 / 9.0	16.5 / 13.0	26.0 / 21.0	33.0 / 25.0
	Heating	High/Low	m³/min	7.0 / 5.0	9.0 / 6.5		12.0 / 9.0	16.5 / 13.0	26.0 / 21.0	33.0 / 25.0
Sound power (nominal)	Cooling		dBA	45.0		50.0		52.0	54.0	60.0
Sound Pressure	Cooling	High/Low	dBA	33.0 / 28.0	35.0 / 29.0		35.5 / 30.5	38.0 / 33.0	40.0 / 35.0	45.0 / 39.0
	Heating	High/Low	dBA	33.0 / 28.0	35.0 / 29.0		35.5 / 30.5	38.0 / 33.0	40.0 / 35.0	45.0 / 39.0
Refrigerant	R-410A									
Power Supply	1~/230V/50Hz									
Piping connections	Liquid (OD)/Gas/Drain	mm	6.35 / 12.7 / 32					9.5 / 15.9 / 32		
Decoration Panel	Model		BYBC32GJW1			BYBC50GJW1		BYBC63GJW1	BYBC125GJW1	
	Colour		White (10Y9/0.5)							
HeightxWidthxDepth	mm		53x1030x680			53x1245x680		53x1430x680	53x1920x680	
Weight	kg		8.0			8.5		9.5	12.0	

FXKQ-MA

Ceiling Mounted Corner Cassette



BRC1E51



BRC1D52



BRC4C61




FXKQ63MA


- Slim design 215mm height
- Auto-swing function ensures efficient air and temperature distribution,
- Choice between 3 auto-swing positions for maximum comfort: standard, draught prevention, ceiling soiling prevention
- Optimum air flow conditions are created by either downward air discharge or frontal air discharge (via optional grille) or a combination of both

- Leaves maximum floor and wall space for furniture, decorations and fittings
- Drain up pump with 500mm lift fitted as standard


Downward discharge

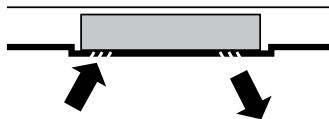

Frontal discharge

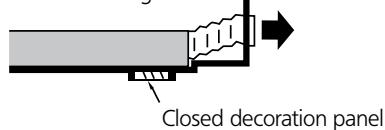

Combination

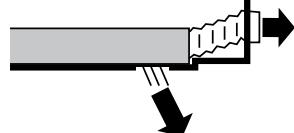

FXKQ-MA						
Indoor Units			FXKQ25MAVE	FXKQ32MAVE	FXKQ40MAVE	FXKQ63MAVE
Capacity	Cooling	kW	2.80	3.60	4.50	7.10
	Heating	kW	3.20	4.00	5.00	8.00
Power input	Cooling	kW		0.066	0.076	0.105
	Heating	kW		0.046	0.056	0.085
Dimensions	(Height x Width x Depth)		215x1,110x710		215x1,310x710	
Weight	kg		31		34	
Air Flow Rate	Cooling	High/Low	m³/min	11.00 / 9.00	13.00 / 10.00	18.00 / 15.00
Sound Pressure	Cooling	High/Low	dBA	38.0 / 33.0	40.0 / 34.0	42.0 / 37.0
Refrigerant	R-410A					
Power Supply	1~/220-240V/50Hz					
Piping connections	Liquid (OD)/Gas/Drain	mm	6.4 / 12.7 / 32		9.5 / 15.9 / 32	
Decoration Panel	Model		BYK45FJW1		BYK71FJW1	
	Colour		White			
HeightxWidthxDepth	mm		70x1240x800		70x1440x800	
Weight	kg		8.5		9.5	

FXDQ-M9

Concealed Ceiling Unit (Small)



- Designed for hotel bedrooms
- Compact dimensions (230mm high & 652mm deep), can easily be mounted in a ceiling void
- The air suction direction can be altered from rear to bottom suction
- Air suction filter fitted as standard
- For easy mounting, the drain pan can be located to the left or the right of the unit
- Allows multi tenant application

FXDQ-M9		
Indoor Units		
Capacity	Cooling	kW
	Heating	kW
Power input	Cooling	kW
	Heating	kW
Dimensions	(Height x Width x Depth)	mm
Weight	kg	17
Air Flow Rate	Cooling	m³/min
	Heating	m³/min
Sound power (nominal)	Cooling	dBA
Sound Pressure	Cooling	dBA
	Heating	dBA
Refrigerant		
Power Supply		
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm
		20
		25
		2.80
		3.20
		0.050
		0.050
		230x502x652
		50.0
		37.0 / 32.0
		37.0 / 32.0
		R-410A
		1~230V/50Hz
		6.4 / 12.7 / 27.2



FXDQ-PB/NB

Slim Concealed Ceiling Unit



BRC1E51



BRC1D52




BRC4C65



FxDQ20-32PB

- Slim design for flexible installation
- Compact dimensions, can easily be mounted in a ceiling void of only 240mm
- Low noise: down to 29 dBA sound pressure level
- Adjustable external static pressure
- Optional discharge flanger available
- Drain up pump with 750mm lift fitted as standard

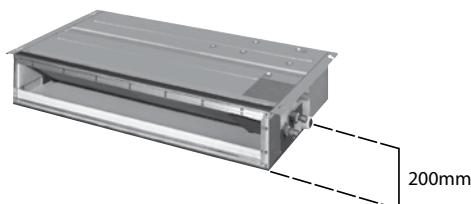

FxDQ-PB/FxDQ-NB										
Indoor Units			20PB	25PB	32PB	40NB	50NB	60NB		
Capacity	Cooling	kW	2.20	2.80	3.60	4.50	5.60	7.10		
	Heating	kW	2.50	3.20	4.00	5.00	6.30	8.00		
Power input	Cooling	kW	0.086		0.089	0.160	0.165	0.181		
	Heating	kW	0.067		0.070	0.147	0.152	0.168		
Dimensions	(Height x Width x Depth)		200x700x620			200x900x620		200x1,100x620		
Weight	kg		23.0			27.0	28.0	31.0		
Air Flow Rate	Cooling	HH/H/L	m³/min		8.0 / 7.2 / 6.4	10.5 / 9.5 / 8.5	12.5 / 11.0 / 10.0	16.50 / 14.5 / 13.00		
External Static Pressure	High/Standard		Pa		30 / 10	44 / 15				
Sound Pressure	Cooling	HH/H/L	dBA		33.0 / 31.0 / 29.0	34.0 / 32.0 / 30.0	35.0 / 33.0 / 31.0	36.0 / 34.0 / 32.0		
Refrigerant	R-410A									
Power Supply	1~/220-240V/50Hz									
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm	6.4 / 12.7 / 26.0			9.5 / 15.9 / 26.0				



FXSQ-P

Concealed Ceiling Unit



- Reduction of power consumption of 20% (compared to FXSQ-M8 series) through use of new DC fan
- Improved comfort thanks to 3-step airflow control
- External static pressure up to 120 Pa facilitates the use with flexible ducts of varying lengths: ideal for shops and medium size offices
- Possibility to change ESP through wired remote control allows optimisation of the supply air volume
- Allows multi tenant applications (option PCB required)
- Easy installation thanks to automatic air flow adjustment towards nominal air flow rate
- Drain-up pump with 624mm lift fitted as standard

How does it work?

- Installer calculates the total duct resistance to determine the required ESP
- During test run, the unit will automatically select the correct fan curve (more than 8 fan curves available) guaranteeing the nominal AFR
- Thanks to the high number of fan curves available, adjustments to duct work can be avoided, resulting in a quicker installation process.

Reduced installation time

- After installation, it is possible that the actual duct resistance is lower than expected at the time of designing. As a consequence the air flow will be too high. With the automatic air flow adjustment function the unit can adapt its fan speed to a lower curve, so the air flow decreases
- The air flow will always be within 10% of the rated air flow because of the amount of possible fan curves (more than 8 fan curves available per model)
- Alternatively the installer can manually select a fan curve with the wired remote control.

FXSQ-P7V3B													
Indoor Units			20	25	32	40	50	63	80	100	125	140	
Capacity	Cooling	kW	2.20	2.80	3.60	4.50	5.60	7.10	9.00	11.20	14.00	16.00	
	Heating	kW	2.50	3.20	4.00	5.00	6.30	8.00	10.00	12.50	16.00	18.00	
Power input	Cooling	kW	0.073	0.079	0.192	0.192	0.192	0.142	0.163	0.247	0.303	0.261	
	Heating	kW	0.073	0.079	0.192	0.192	0.192	0.142	0.163	0.247	0.303	0.249	
Dimensions	(Height x Width x Depth)	mm	300x550x700			300x700x700			300x1000x700			300x1400x700	
Weight	kg		23			26			35			46	
Air Flow Rate	Cooling	High/Low	m³/min	9.00 / 6.50	9.50 / 7.00	16.00 / 11.00	13.50 / 16.00	25.00 / 20.00	32.00 / 23.00	39.00 / 28.00	46.00 / 32.00		
	Heating	High/Low	m³/min	9.00 / 6.50	9.50 / 7.00	16.00 / 11.00	13.50 / 16.00	25.00 / 20.00	32.00 / 23.00	39.00 / 28.00	46.00 / 32.00		
External Static Pressure	High / Standard	Pa	70 / 30			100 / 30			100 / 40			120 / 50	
Sound power (nominal)	Cooling		dBA	55.0	56.0	63.0	59.0	63.0	61.0	66.0	67.00		
Sound Pressure	Cooling	High/Low	dBA	32.0 / 26.0	33.0 / 27.0	37.0 / 29.0	37.0 / 30.0	38.0 / 32.0	40.0 / 33.0	42.00 / 34.00			
	Heating	High/Low	dBA	32.0 / 26.0	33.0 / 27.0	37.0 / 29.0	37.0 / 30.0	38.0 / 32.0	40.0 / 33.0	42.00 / 34.00			
Refrigerant	R-410A												
Power Supply	1~220-240V/50Hz												
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm	6.35 / 12.7 / 32				9.5 / 15.9 / 32						
Decoration Panel	Model		BYBS32DJW1			BYBS45DJW1			BYBS71DJW1				
	Colour		White (10Y9/0,5)										
HeightxWidthxDepth	mm		55x650x500			55x800x500			55x1100x500			55x1500x500	
Weight	kg		3			3.5			4.5			6.5	



FXMQ-P7

Concealed Ceiling Unit (Inverter Fan)



BRC1E51



BRC1D52



BRC4C65



FXMQ40P

- Reduction of power consumption through use of new DC fan motor technology
- Improved comfort thanks to 3-step airflow control
- Compact height of 300mm, allows installation in narrow ceiling voids
- Up to 200 Pa external static pressure allows extensive ductwork runs and flexible application
- Possibility to change ESP through wired remote control allows optimisation of the supply air volume (changeable in 13 or 14 stages)
- Built-in drain pump with 700mm lift fitted as standard
- Allows multi tenant applications (option PCB required)
- The air suction direction can be from bottom or rear
- Standard air filter

FXMQ-P7													
Indoor Units			40	50	63	80	100	125					
Capacity	Cooling	kW	4.50	5.60	7.10	9.00	11.20	14.00					
	Heating	kW	5.00	6.30	8.00	10.00	12.50	16.00					
Power input (Nominal)	Cooling	kW	0.194	0.215	0.23	0.298	0.376	0.461					
	Heating	kW	0.182	0.203	0.218	0.286	0.364	0.449					
Dimensions	(Height x Width x Depth)		300x700x700	300x1000x700			300x1400x700						
Weight	kg		28	36			46						
Air Flow Rate	Cooling	l/H/H/L	16.0 / 13.0 / 11.0	18.0 / 16.5 / 15.0	19.5 / 17.5 / 16.0	25.0 / 22.5 / 20.0	32.0 / 27.0 / 23.0	39.0 / 33.0 / 28.0					
External Static Pressure	H/S/L	Pa	160 / 100 / 30	200 / 100 / 50									
Refrigerant	R-410A												
Power Supply	1~/220-240V/50Hz												
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm	6.4 / 12.7 / 32			9.5 / 15.9 / 32							



FXMQ-MA

Concealed Ceiling Unit (Large)



BRC1E51



BRC1D52




BRC4C62



FXMQ-MA

- Range of models 200-250 class
- Up to 270 Pa external static pressure allows extensive ductwork runs and flexible application: ideal for use in large areas
- Optional drain pump (accessory): housing the drain pump inside the unit has reduced the required installation space
- Optional suction air filter plenums and filters

Optional drain pump accessory

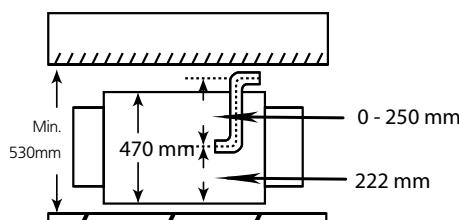


FXMQ-MA		
Indoor Units		
Capacity	Cooling	kw
	Heating	kw
Power input (Nominal)	Cooling	kw
	Heating	kw
Dimensions	(Height x Width x Depth)	mm
Weight	kg	137
Air Flow Rate	Cooling	m³/min
External Static Pressure	High / Standard	Pa
Sound Pressure	Cooling	dBA
Refrigerant		R-410A
Power Supply		1~/220-240V/50Hz
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm
		9.5 / 19.1 / PS1B
		9.5 / 22.2 / PS1B

FXAQ-P

Wall Mounted Unit



- Modern style flat front panel
- Vertical auto-swing function moves the discharge flaps up and down for efficient air distribution throughout the room
- 5 different discharge angles can be programmed via the remote control



- Both horizontal flaps and front panel can easily be removed and washed
- All maintenance operations can be carried out from the front of the unit
- Ideal for refurbishment projects
- Allows multi tenant applications (option PCB required)


FXAQ-P									
Indoor Units				20	25	32	40	50	63
Capacity	Cooling	Nominal	kW	2.20	2.80	3.60	4.50	5.60	7.10
	Heating	Nominal	kW	2.50	3.20	4.00	5.00	6.30	8.00
Power input (50Hz)	Cooling	Nominal	kW	0.019	0.028	0.030	0.020	0.033	0.050
	Heating	Nominal	kW	0.029	0.034	0.035	0.020	0.039	0.060
Dimensions	(Height x Width x Depth)		mm	290x795x238			290x1,050x238		
Weight			kg	11			14		
Air Flow Rate	Cooling	HH/H/M/L	m³/min	- / 7.5 / - / 4.5	- / 8 / - / 5	- / 8.5 / - / 5.5	- / 12 / - / 9	- / 15 / - / 12	- / 19 / - / 14
Refrigerant	R-410A								
Sound Power	Cooling	Nominal	dBA	-					
Sound Pressure	Cooling	HH/H/M/L	dBA	- / 35 / - / 29	- / 36 / - / 29	- / 37 / - / 29	- / 39 / - / 34	- / 42 / - / 36	- / 46 / - / 39
Power Supply	1~/220-240V/50Hz								
Piping connections	Liquid (OD)/Gas/Drain	mm		6.35 / 12.7 / VP13 (I.D. 13.O.D. 18)					
Casing colour	White (3.0Y8.5 / 0.5)								

FXHQ-MA

Ceiling Suspended Unit



- Air flow distribution for ceiling heights up to 3.8m without loss of capacity
- Use of W-shaped Coanda flap enhances horizontal and vertical air circulation characteristics
- Wider air discharge thanks to Coanda effect: up to 100 degrees

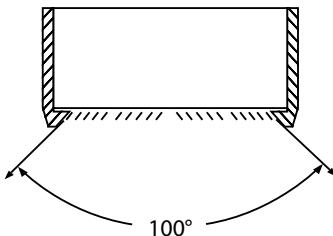

- Easy installation and maintenance
- Long life filter fitted as standard


FXHQ-MA					
			32	63	100
Indoor Units					
Capacity	Cooling	kw	3.60	7.10	11.20
	Heating	kw	4.00	8.00	12.50
Power input	Cooling	kw	0.111	0.115	0.135
	Heating	kw	0.111	0.115	0.135
Dimensions	(Height x Width x Depth)	mm	195x960x680	195x1,160x680	195x1,400x680
Weight		kg	24	28	33
Air Flow Rate	Cooling	High/Low	m³/min	12.00 / 10.00	17.50 / 14.00
Sound Pressure	Cooling	High/Low	dBA	36.0 / 31.0	39.0 / 34.0
Refrigerant				R-410A	
Power Supply				1~/220-240V/50Hz	
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm	6.4 / 12.7 / 26		9.5 / 15.9 / 26

FXUQ-MA

4-Way Blow Ceiling Suspended Cassette



- Group control with other VRV indoor units possible
- 5m maximum distance between FXUQ unit and junction box
- Air can be discharged in any of 4 directions
- Possibility to shut 1 or 2 flaps for easy installation in corners

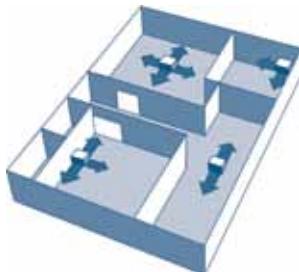

BRC1E51



BRC1D52



BRC7C528



FXUQ71MA

- Auto-swing function ensures efficient air and temperature distribution.
- Air flow distribution for ceiling heights up to 3.5m without loss of capacity.
- Air can be discharged at 5 different angles between 0 and 60 degrees
- Air filter, drain pan and heat exchanger fin are mildew proof and anti-bacterial treated
- Drain up pump with 500mm lift fitted as standard

FXUQ-MA			71	100	125
Indoor Units					
Capacity	Cooling	kw	8.0	11.2	14.0
	Heating	kw	9.0	12.5	14.0
Power input	Cooling	kw	0.180	0.289	
	Heating	kw	0.160	0.269	
Dimensions	(Height x Width x Depth)	mm	165x895x895	230x895x895	
Weight	kg		25	31	
Air Flow Rate	Cooling	m³/min	19.00 / 14.00	29.00 / 21.00	32.00 / 23.00
	Heating	m³/min	19.00 / 14.00	29.00 / 21.00	32.00 / 23.00
Sound power (nominal)	Cooling	dBA	56.0	59.0	60.0
Sound Pressure	Cooling	dBA	40.0 / 35.0	43.0 / 38.0	44.0 / 39.0
	Heating	dBA	40.0 / 35.0	43.0 / 38.0	44.0 / 39.0
Refrigerant			R-410A		
Power Supply			1~/220-240V/50Hz		
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm	9.5 / 15.9 / 26		
Combination with junction box			BEVQ71MA	BEVQ100MA	BEVQ125MA

BEVQ-MA			71	100	125
Dimensions	HxD	mm		100x350x225	
Weight	kg		3.0	3.0	3.5
Casing				Galvanised steel plate	
Power supply	V/F			1~, 50Hz, 220-240V	

FXNQ-MA

Concealed Floor Standing Unit



BRC1E51



BRC1D52




BRC4C62



FXNQ20,25MA

- Ideal for installation beneath a window
- Long life filter fitted as standard
- Requires very little installation space, only 220mm depth
- The connecting port faces downward, eliminating the need to attach auxiliary piping

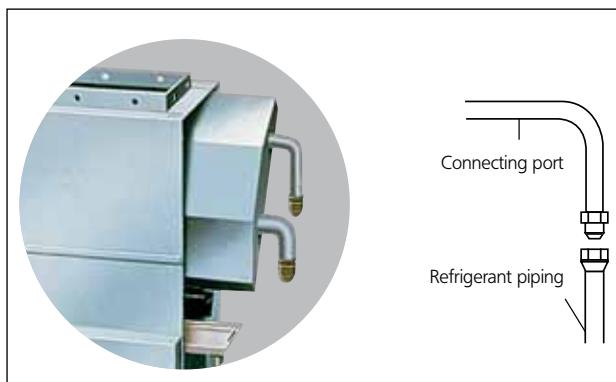

FXNQ-MA											
Indoor Units			20	25	32	40	50	63			
Capacity	Cooling	kw	2.20	2.80	3.60	4.50	5.60	7.10			
	Heating	kw	2.50	3.20	4.00	5.00	6.30	8.00			
Power input	Cooling	kw		0.049		0.090		0.110			
	Heating	kw		0.049		0.090		0.110			
Dimensions	(Height x Width x Depth)	mm	610x930x220			610x1,070x220					
Weight	kg		19			23					
Air Flow Rate	Cooling	High/Low	m³/min	7.00 / 6.00	8.00 / 6.00	11.00 / 8.50	14.00 / 11.00	16.00 / 12.00			
Sound Pressure	Cooling	High/Low	dBA	35.0 / 32.0			38.0 / 33.0	39.0 / 34.0			
Refrigerant	R-410A										
Power Supply	1~/220-240V/50Hz										
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm	6.4 / 12.7 / 21					9.5 / 15.9 / 21			

FXLQ-P

Floor Standing Unit



BRC1E51



BRC1D52




BRC7C62



FXLQ20-25P

- New stylish modern casing: finished in RAL 9010 colour
- Unit can be installed as free standing model by use of optional back plate
- Ideal for installation beneath a window
- The use of inverter type outdoor units results in an air conditioning system with a high energy efficiency
- Home leave operation saves energy during absence
- Requires very little installation space
- Running the pipes from connections at the back, enables the unit to be wall mounted which in turn allows cleaning beneath the unit where dust tends to accumulate

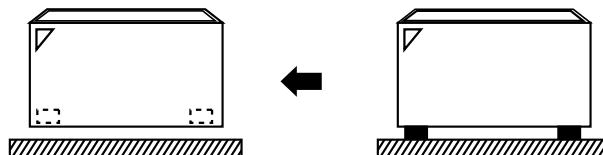

- Wired remote control can easily be integrated in the unit

FXLQ-P									
Indoor Units				20	25	32	40	50	63
Capacity	Cooling	Nominal	kW	2.20	2.80	3.60	4.50	5.60	7.10
	Heating	Nominal	kW	2.50	3.20	4.00	5.00	6.30	8.00
Power input (50Hz)	Cooling	Nominal	kW	0.049		0.090		0.110	
	Heating	Nominal	kW	0.049		0.090		0.110	
Dimensions	(Height x Width x Depth)		mm	600x1,000x232		600x1,140x232		600x1,420x232	
Weight		kg		27		32		38	
Air Flow Rate	Cooling	HH/H/M/L	m³/min	- / 7 / - / 6	- / 8 / - / 6	- / 11 / - / 8.5	- / 14 / - / 11	- / 16 / - / 12	
Refrigerant	R-410A								
Sound Power	Cooling	Nominal	dBA			-			
Sound Pressure	Cooling	HH/H/M/L	dBA		- / 35 / - / 32		- / 38 / - / 33	- / 39 / - / 34	- / 40 / - / 35
Power Supply	1~/220-240V/50Hz								
Piping connections	Liquid (OD)/Gas/Drain	mm		6.35 / 12.7 / 21				9.52 / 15.9 / 21	
Casing colour	Pure white (RAL9010) + Iron gray (RAL7011)								




CAVM150DK80FSC

CAVS/M/L/XL-DK-F/C/R

Biddle Comfort Air Curtain

- Connectable to VRV® heat recovery and heat pump
- VRV® is among the first DX systems suitable for connection to air curtains
- A payback period of less than 1.5 years compared to installing an electric air curtain
- Provides virtually free air curtain heating via recovered heat from indoor units in cooling mode¹
- Easy and quick to install at reduced costs since no additional water systems, boilers and gas connections are required
- All year round comfort ensured by the constant discharge velocity and adjustable jet airflow width (European patent)
- Maximum energy efficiency stemming from almost zero down flow turbulence, optimised air flow and the application of advanced discharge rectifier technology
- Around 85% air separation efficiency, greatly reducing both heat loss and required indoor unit heating capacity

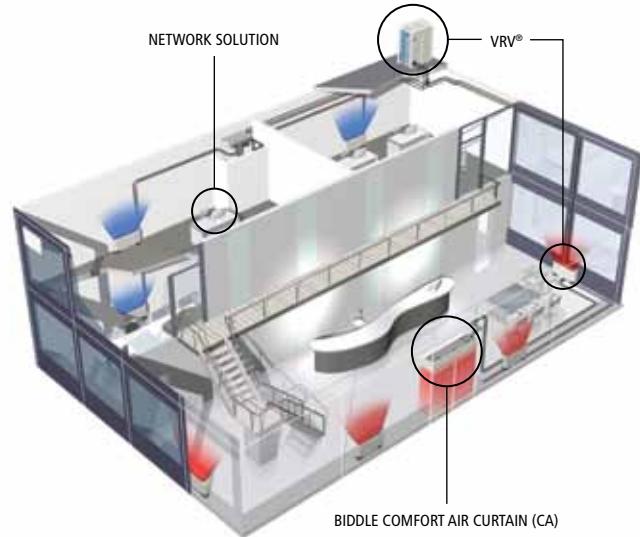

		Small				Medium			
Indoor Units		CAVS100DK80*BC/*SC	CAVS150DK80*BC/*SC	CAVS200DK100*BC/*SC	CAVS250DK140*BC/*SC	CAVM100DK80*BC/*SC	CAVM150DK80*BC/*SC	CAVM200DK100*BC/*SC	CAVM250DK140*BC/*SC
Heating capacity ²	kW	6.0	7.5	9.7	13.3	7.7	9.4	12.1	16.8
Delta T ²	Inlet = room temperature	K	20	17	16	18	15	14	16
Power input (50Hz)	Fan only/Heating	kW	0.20	0.30	0.40	0.50	0.28	0.42	0.56
Maximum door width	m	1.0	1.5	2.0	2.5	1.0	1.5	2.0	2.5
Maximum door height	Favorable/Normal/Unfavorable conditions	m	2.4 / 2.2 / -				2.8 / 2.5 / 2.2		
Dimensions	Height	Unit F/C/R	mm	270					
	Width	Unit F/C/R	mm	1,123/1,000/1,048	1,623/1,500/1,548	2,123/2,000/2,048	2,623/2,500/2,548	1,123/1,000/1,048	1,623/1,500/1,548
	Depth	Unit F/C/R	mm	590 / 821 / 561					
Weight	Unit F/C/R	kg	61 / 59 / 61	73 / 83 / 88	89 / 102 / 108	101 / 129 / 137	66 / 68 / 66	79 / 88 / 93	97 / 111 / 117
Casing	Colour		BC:RAL9010 / SC:RAL 9006						
Fan - Air flow rate - Heating ²		m ³ /h	880	1,310	1,750	2,190	1,230	1,840	2,450
Refrigerant	Type		R-410A						
Sound Pressure - Heating ²		dBA	42	44	45	46	45	47	48
Piping connections	Liquid (OD)/Gas	mm	9.52 / 16.0						
Power Supply			1~/230V/50Hz						

		Large				XLarge			
Indoor Units		CAVL100DK125*BC/*SC	CAVL150DK200*BC/*SC	CAVL200DK250*BC/*SC	CAVL250DK250*BC/*SC	CAVXL100DK125*BC/*SC	CAVXL150DK200*BC/*SC	CAVXL200DK250*BC/*SC	CAVXL250DK250*BC/*SC
Heating capacity ²	kW	12.5	18.8	24.0	25.8	14.7	22.0	27.8	29.6
Delta T ²	Inlet = room temperature	K	17		16	14	15		
Power input (50Hz)	Fan only/Heating	kW	0.75	1.13	1.50	1.88	1.40	2.10	2.80
Maximum door width	m	1.0	1.5	2.0	2.5	1.0	1.5	2.0	2.5
Maximum door height	Favorable/Normal/Unfavorable conditions	m	3.3 / 3.0 / 2.5				3.8 / 3.5 / 3.5		
Dimensions	Height	Unit F/C/R	mm	370					
	Width	Unit F/C/R	mm	1,123/1,000/1,048	1,623/1,500/1,548	2,123/2,000/2,048	2,623/2,500/2,548	1,123/1,000/1,048	1,623/1,500/1,548
	Depth	Unit F/C/R	mm	774 / 1,105 / 745					
Weight	Unit F/C/R	kg	83 / 81 / 83	108 / 118 / 141	137 / 151 / 155	166 / 190 / 196	69 / 84 / 86	102 / 123 / 146	130 / 160 / 164
Casing	Colour		BC:RAL9010 / SC:RAL 9006						
Fan - Air flow rate - Heating ²		m ³ /h	1,730	2,600	3,470	4,340	2,800	4,190	5,590
Refrigerant	Type		R-410A						
Sound Pressure - Heating ²		dBA	51	53	54	55	56	58	59
Piping connections	Liquid (OD)/Gas	mm	9.52 / 16.0	9.52 / 19.0	9.52 / 22.0	9.52 / 22.0	9.52 / 16.0	9.52 / 19.0	9.52 / 22
Power Supply			1~/230V/50Hz						

¹ in case of connection to a VRV® heat recovery outdoor unit

² values measured at speed 4, installation level B

F: Freehanging model, C: Cassette model, R: Recessed model



HOT WATER MODULE

For VRV® Heat Recovery

**Ideally positioned for the Commercial office sector
Daikin UK now offers an energy efficient domestic
hot water and heating solution for w.c. facilities,
kitchens and staff break out areas.**

Hot Water Module

The VRVIII hot water module operates with the VRVIII heat recovery system to provide an energy efficient means of producing hot water from recovered or recycled heat.

To date, the primary operation of the VRV heat recovery system has been to extract heat from areas being cooled and re-distribute to parts of the building with a heating requirement, often as a result of building orientation and diversity. However, if more heat is extracted than can be effectively re-used this surplus heat is generally dissipated to the atmosphere at the VRV outdoor unit and subsequently the recovered energy is wasted and the system is not operating at its peak efficiency.

Using the surplus heat

By using the hot water module with VRVIII heat recovery the surplus heat can be effectively used as renewable heat for the generation and storage of domestic hot water as well as for heating, via under floor circuits, fan coil units, and low temperature radiators. In combination the hot water module and the VRVIII heat recovery system means that less energy is wasted and the overall system efficiency is greatly improved, reducing running costs and reducing carbon emissions.

Controls

Hot water controls and user interface are located within the module and enable control of hot water and/or heating according to user requirements and to maximize re-use of recovered heat from other parts of the building during and outside or normal operational hours.

INDOOR UNIT (HYDRO BOX)			UK.EKHBH80AA/VRV		UK.EKHBH140AB/VRV	
Function						Heating only & Optional Hot water
Heating Capacity	kW		8		16	
Capacity Index Limit			80		140	
Dimensions	HxWxD	mm		922x502x361		
Leaving Water	heating	°C		35~50		
Drain valve				Yes		
Material			Epoxy polyester painted galvanized steel			
Colour			RAL 9010 (neutral white)			
Factory Mounted Electric Heater (*note 1)			3kW 1 step			
Hydrobox Control Power Supply (*note 1)			230V Single Phase (5A)			
Back Up Heater Power Supply (*note 1)			230V Single Phase (20A) - Only Required for Heating operation			
Tank Booster Heater Power Supply			230V Single Phase (20A) - Only Required with Hot Water Option			
Mandatory Accessory			EKEXV80		EKEXV140	

DOMESTIC HOT WATER TANK		EKHWS150B3V3	EKHWS200B3V3	EKHWS300B3V3	EKHWSU150B3V3	EKHWSU200B3V3	EKHWSU300B3V3
Suitable for			Open Vent Systems		Unvented Systems (EKUHWB Kit also required - see below)		
Water Volume	l	150	200	300	150	200	300
Max Water Temperature	°C			85			
Booster Heater Capacity	kW			3			
Power Supply	ph/V/Hz			1/230/50			
Height	mm	900	1150	1600	1015	1265	1715
Diameter	mm			580			
Empty Weight	kg	37	45	59	38	46	60
Colour		Neutral White					
Material Inside Tank		Stainless Steel (DIN 1.452 1)					
Material Outside Casing		Epoxy-Coated Mild Steel					
Piping Connections (Diameter)	Water inlet H/E	inch		3/4"			
	Water outlet H/E	inch		3/4"			
	Cold Water in	inch		3/4"			
	Hot water out	inch		3/4"			

ACCESSORY KIT FOR UNVENTED SYSTEMS		Domestic Hot Water Tank EKHWSU-B3V3	
EKUHWB	Includes: Combined Pressure Reducing Valve, Non Return Valve, Strainer, Expansion Relief Valve, Expansion Vessel, Tundish		•

*note 1 - Use Power Supply from same phase for Hydrobox Control Power, Back Up Heater and Tank Booster Heater



Ventilation

Air conditioning and air movement of course, are not the same. Neither actually includes the other but both are necessary components of a comfortable and energy efficient indoor climate. Ventilation by itself cannot cope with the high heat gains generated by modern office complexes and indoor temperature and humidity levels can fluctuate wildly if ventilation alone is installed. On the other hand, air conditioning cannot supply the necessary fresh air needed for a balanced system. The ideal solution therefore, requires air conditioning and ventilation in combination.

Daikin manufactures and markets a range of fresh air reclaim, treatment and handling systems, carefully designed for integration with its air conditioning systems in order to achieve the most economic, environmentally conscious and best possible indoor comfort conditions.

HEAT RECLAIM VENTILATION (HRV)

VAM-FA	162
VKM-GA	163

OUTDOOR AIR PROCESSING UNIT

FXMQ-MFV1	164
-----------	-----

AIR HANDLING APPLICATIONS

ERQ	166
VRV Air handling application (VRV + EXV – KIT)	168
Air Handling Units VAP(W)-L	169
VAP-L Internally mounted air handling units	170
VAW-L Externally mounted air handling units	174

VAM-FA


Heat Reclaim Ventilation



The Daikin heat recovery ventilation system modulates the temperature and humidity of incoming fresh air to match indoor conditions. A balance is thus achieved between indoor and outdoor ambients, enabling the cooling or heating load placed on the air conditioning system to be reduced significantly.

HRV units can be controlled individually or integral with the air conditioning system (Daikin VRV® or Sky Air series).

- 9 models to choose from
- Compact, energy saving ventilation
- Specially developed heat exchange element with HEP (High Efficiency Paper)
- Easy integration into the VRV® system
- Connectable to current Daikin control systems:

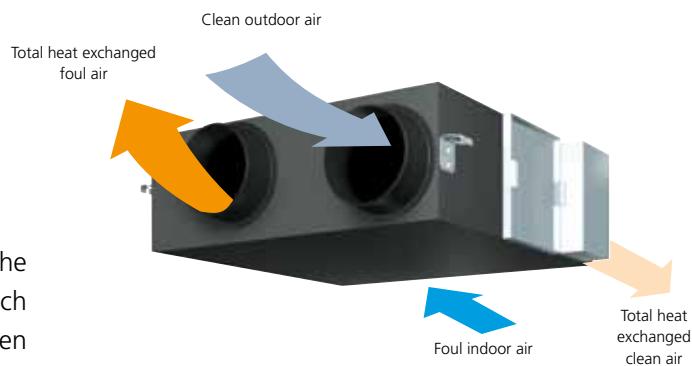

DS-net

Intelligent Controller

Intelligent Manager

BACnet Gateway

DMS-IF

VAM-FA										
Ventilation		VAM150FA8	VAM250FA8	VAM350FA8	VAM500FA8	VAM650FA8	VAM800FA8	VAM1000FA8	VAM1500FA8	VAM2000FA8
Air flow rate	m³/h	150	250	350	500	650	800	1,000	1,500	2,000
Sound pressure level (max.) (1)	dBA	27/28.5	28/29	32/34	33/34.5	34.5/35.5	36/37	36/37	39.5/41.5	40/42.5
External static pressure (max.)	Pa	69	64	98	98	93	137	157	137	137
Temperature exchange efficiency	%	74	72	75	74	74	74	75	75	75
Enthalpy exchange efficiency	%	58	58	61	58	58	60	61	61	61
	heating									
	cooling									
Dimensions	H	mm	269	269	285	285	348	348	348	710
	W	mm	760	760	812	812	988	988	988	1,498
	D	mm	509	509	800	800	852	852	1,140	852
Weight	kg	24	24	33	33	48	48	61	132	158
Duct diameter	mm	ø 100	ø 150	ø 150	ø 200	ø 200	ø 250	ø 250	ø 350	ø 350
Power supply	V/Hz	1 ~, 50Hz, 220-240V								

(1) Sound pressure level is measured in heat exchange mode.



VKM-GA

Heat Reclaim Ventilation with DX Coil



- Heat purge (economiser): heat accumulated indoors is discharged at night
- Integration of air conditioning into HRV unit
- Increased static pressure thanks to improved fan performance
- Integrated control with VRV system only
- Connectable to current Daikin control systems:

DS⁺net

Intelligent Controller

Intelligent Manager

BACnet Gateway

DMS-IF

VKM-GA			VKM50GA	VKM80GA	VKM100GA
Ventilation & DX coil					
Fresh air conditioning load	Cooling kW		4.71	7.46	9.12
	Heating kW		5.58	8.79	10.69
Air flow rate	UH - H - L m ³ /h		500 - 500 - 440	750 - 750 - 640	950 - 950 - 820
Sound pressure level - 220V	UH - H - L dBA		38 - 36 - 33.5	40 - 37.5 - 34.5	40 - 38 - 35
Sound pressure level - 240V	UH - H - L dBA		39 - 37 - 33.5	41.5 - 39 - 37	41 - 39 - 36.5
Static pressure	UH - H - L Pa		180 - 150 - 110	170 - 120 - 80	150 - 100 - 70
Temperature exchange efficiency	UH - H - L %		76 - 76 - 77.5	78 - 78 - 79	74 - 74 - 76.5
Enthalpy exchange efficiency - cooling	UH - H - L %		64 - 64 - 67	66 - 66 - 68	62 - 62 - 66
Enthalpy exchange efficiency - heating	UH - H - L %		67 - 67 - 69	71 - 71 - 73	65 - 65 - 69
Dimensions	Height mm		387	387	387
	Width mm		1,764	1,764	1,764
	Depth mm		832	1,214	1,214
Weight kg			96	109	114
Power supply	V1			1 ~, 220-240V, 50Hz	




FXMQ-MF

Outdoor Air Processing Unit



- 100% fresh air intake possible
- Operation range: -5°C to 43°C
- 225 Pa external static pressure allows extensive ductwork runs and flexible application: ideal for use in large areas
- Drain pump kit available as accessory

FXMQ250MF

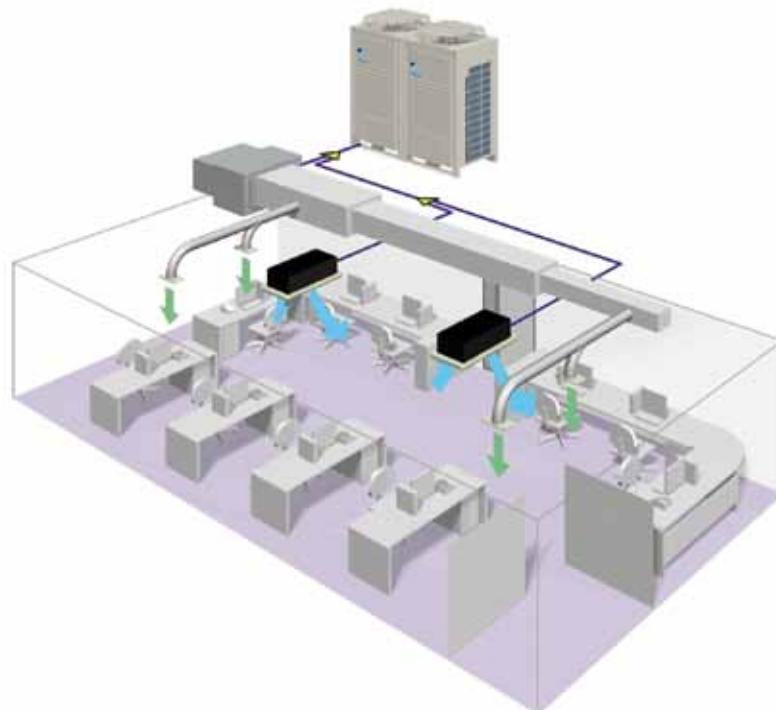

FXMQ-MFV1					
Indoor Units			FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1
Capacity	Cooling	kw	14.0	22.4	28.00
	Heating	kw	8.9	13.9	17.40
Power input	Cooling	kw	0.359	0.548	0.638
	Heating	kw	0.359	0.548	0.638
Dimensions	(Height x Width x Depth)		470x744x1100	470x1380x1100	
Weight	kg		86	123	
Air Flow Rate	Cooling	Medium	m³/min	18.0	28.0
	Heating	Medium	m³/min	18.0	28.0
Power Supply	220-240V/50Hz				
Piping connections	Liquid (OD)/Gas/Drain	mm	9.5 / 15.9 / PS1B	9.5 / 19.1 / PS1B	9.5 / 22.2 / PS1B



Condensing Units for Air Handling Applications (pair)



A range of R-410A inverter condensing units for pair application with air handling units.
Inverter controlled heat pump units with R-410A refrigerant

- Large capacity range (from 100 to 250 class)
- Wide range of expansion valve kits available (from 63 to 250 class)
- Ventilation and air conditioning in one solution
- EKEXV-kit & control boxes are designed for outdoor installation and can be wall mounted
- Outdoor unit operation range: -5oCDB ~ 43 oCDB
- Flexible control possibilities:

Control x:


control of air temperature (discharge temperature, suction temperature, room temperature) via external device (DDC controller)

Control y:

control of evaporating temperature via Daikin control (no DDC controller needed)

Control z:

control of air temperature (suction temperature, room temperature) via Daikin control (no DDC controller needed).

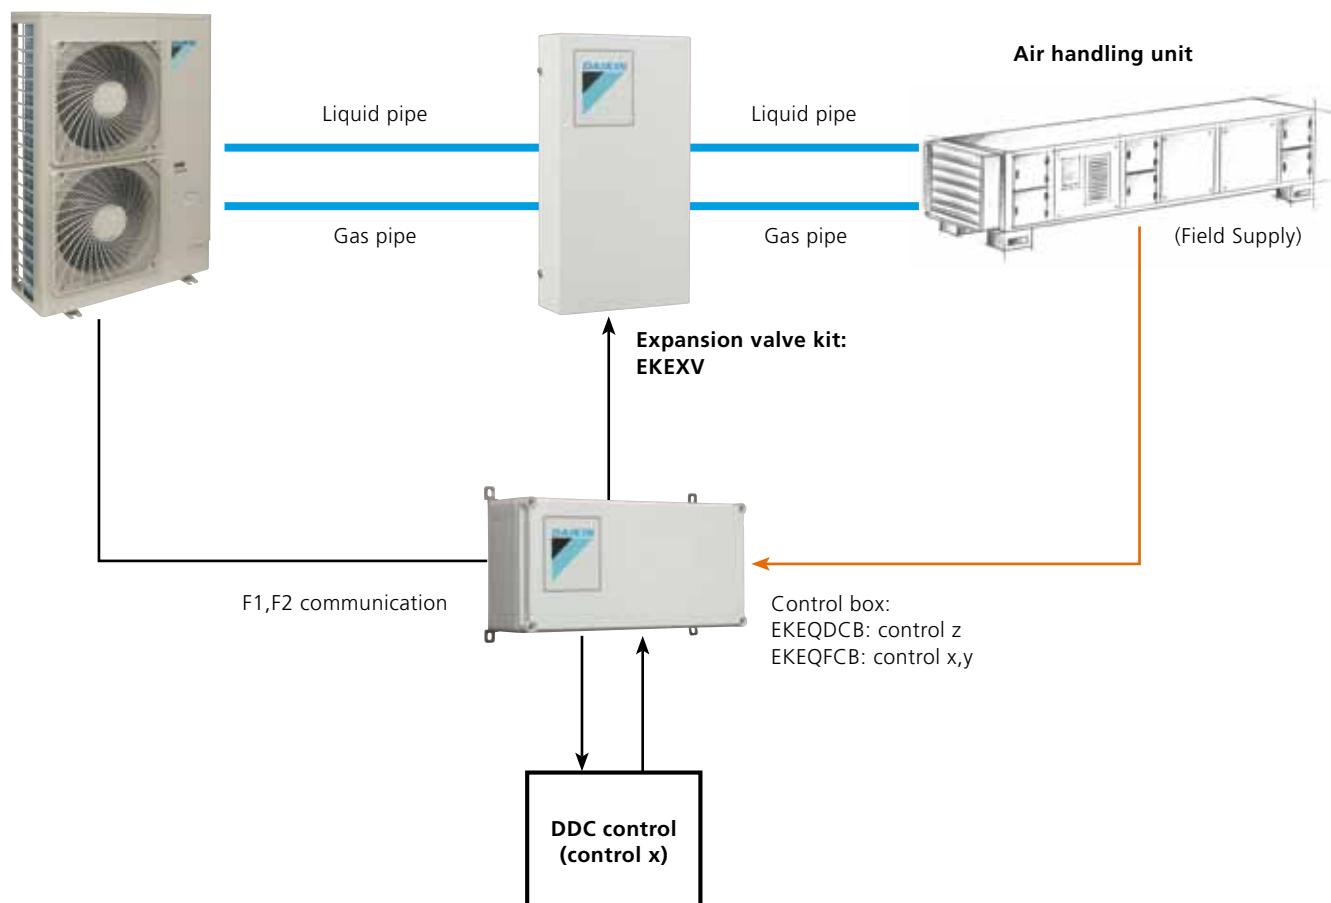

HEAT PUMP						
Outdoor units				ERQ100AV1	ERQ125AV1	ERQ140AV1
Capacity	Cooling	Nominal	kW	11.2	14.0	15.5
	Heating	Nominal	kW	12.5	16.0	18.0
Power input	Cooling	Nominal	kW	2.81	3.51	4.53
	Heating	Nominal	kW	2.74	3.86	4.57
EER				3.99		3.42
COP				4.56	4.15	3.94
Casing	Colour			Daikin White		
	Material			Painted galvanized steel plate		
Dimensions	HxDxW	mm		1,345 x 900 x 320		
Weight		kg		120		
Sound power level	Cooling	Nominal	dBA	66	67	69
Sound pressure level	Cooling	Nominal	dBA	50	51	53
	Heating	Nominal	dBA	52	53	55
Operation range	Cooling	Min-Max	°CDB	-5 ~ 46		
	Heating	Min-Max	°CWB	-20 ~ 15.5		
Refrigerant type				R-410A		
Piping connections	Liquid	mm		ø9.52		
	Gas	mm		ø15.9		
	Drain	mm		3 x ø26		
Piping length	Max total length		m	55		
Power supply	1 ~, 220-240V, 50Hz					


HEAT PUMP						
Outdoor units				ERQ125AW1	ERQ200AW1	ERQ250AW1
Capacity	Cooling	Nominal	kW	14.0	22.4	28.0
	Heating	Nominal	kW	16.0	25.0	31.5
Power input	Cooling	Nominal	kW	3.52	5.22	7.42
	Heating	Nominal	kW	4.00	5.56	7.70
EER				3.98	4.29	3.77
COP				4.00	4.50	4.09
Casing	Colour			Daikin White		
	Material			Painted galvanized steel plate		
Dimensions	HxDxW	mm		1,680 x 635 x 765	1,680 x 930 x 765	
Weight		kg		159	187	240
Sound power level	Cooling	Nominal	dBA	72		78
Sound pressure level	Cooling	Nominal	dBA	54	57	58
Operation range	Cooling	Min-Max	°CDB	-5 ~ 43		
	Heating	Min-Max	°CWB	-20 ~ 15		
Refrigerant type				R-410A		
Piping connections	Liquid	mm		ø9.52		
	Gas	mm		ø15.9		
Piping length	Max total length		m	55		
Power supply	3N~, 400V, 50Hz					

Air Handling Applications



A R-410A inverter condensing units range for multi application with air handling units.

- Inverter controlled units
- Large capacity range (from 5 to 18HP)
- Cooling only and heat pump
- R-410A
- Control z:
control of air temperature (suction temperature, room temperature) via Daikin control (no DDC controller needed)
- Large range of expansion valve kits available
- BRC1D52 is used to set the set point temperature (connected to the EKEXMCB).

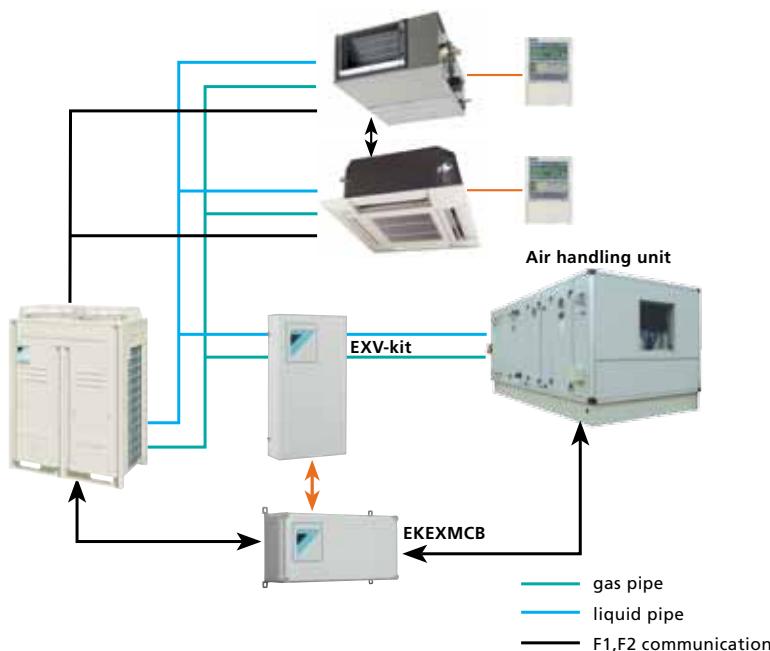

Outdoor Unit								
RXYQ-P(A)/P8		5	8	10	12	14	16	18
Capacity range	HP	5	8	10	12	14	16	18
Capacity	Cooling kW	14.0	22.4	28.0	33.5	40.0	45.0	49.0
Power Input	Cooling kW	3.52	5.56	7.42	9.62	12.4	14.2	16.2
Dimensions (Height x Width x Depth)	mm	1,680x635x765		1,680x930x765		1,680x1,240x765		
Weight	kg	157	185	238		315		323
Sound Level	Sound Power Cooling dBA	72		78		80		83
	Sound Cooling dBA	54	57	58		60		63
Air Flow Rate (Nominal) at 230V	Cooling m³/min	95	171	185	196	233		239
Operation Range	Cooling Min~Max °CDB				-5.0~43.0			
Refrigerant					R-410A			
Power Supply					3N~/400V/50Hz			
Max n° of indoor units to be connected		8	13	16	19	23	26	29
Piping connections	Liquid (OD)/Gas mm	9.5 / 15.9	9.5 / 19.1	9.5 / 22.2	12.7 / 22.2	12.7 / 28.6	12.7 / 28.6	15.9 / 28.6

Combination Table		Expansion valve kit								
Outdoor units		Control box	class 50	class 63	class 80	class 100	class 125	class 140	class 200	class 250
		EKEXMCB	EKEXV50	EKEXV63	EKEXV80	EKEXV100	EKEXV125	EKEXV140	EKEXV200	EKEXV250
3ph	RXYQ5P	X	X	X	X	X	X	X	X	X
	RXYQ8P8	X	X	X	X	X	X	X	X	X
	RXYQ10P	X	X	X	X	X	X	X	X	X
	RXYQ12P	X	X	X	X	X	X	X	X	X
	RXYQ14PA	X	X	X	X	X	X	X	X	X
	RXYQ16PA	X	X	X	X	X	X	X	X	X
	RXYQ18PA	X	X	X	X	X	X	X	X	X


VAP(W)-L

Air Handling Units

Air Handling Units

The Daikin range has 5 air flow volumes from 1750 m³/hr (0.48 m³/s) to 9000 m³/hr (2.54 m³/s) all capable of 250 pa external static.

They can be broken down into 3 distinct groups all of which are available in both Internally mounted plant room - VAP and externally mounted weatherproofed types - VAW.


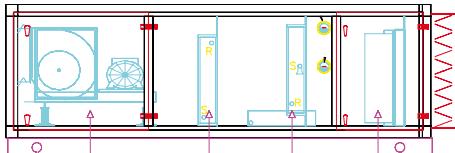


The range VAP/WLA-D is a straight forward supply only unit

- Type A with heating by LTHW, Type B with heating by Electric, Type C with heating by LTHW & DX cooling, Type D with heating by Electric & DX cooling,

The range VAP/WLE-H is a Supply & Extract with a Heat cube plate heat exchanger which recovers sensible heat thus reducing energy

- Type E Heat Cube with heating by LTHW, Type F Heat Cube with heating by Electric, Type G Heat Cube with heating by LTHW & DX cooling, Type H Heat Cube with heating by Electric & DX cooling,

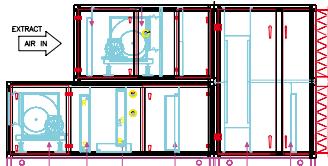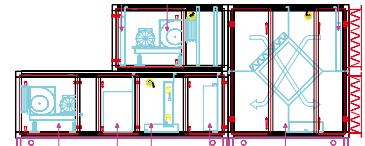

The range VAP/WLI-L is a Supply & Extract with a Thermal Wheel heat exchanger which recovers sensible heat thus reducing energy

- Type I Thermal Wheel with heating by LTHW, Type J Thermal Wheel with heating by Electric, Type K Thermal Wheel with heating by LTHW & DX cooling, Type L Thermal Wheel with heating by Electric & DX cooling.

Capacity Conditions

The heating conditions are based on Airside - 5°C db on and 20°C db off, LTHW on 82°C & off @ 71°C

The cooling conditions are based on Airside on coil 32°C db / 22°C wb, off @ 22°C db & 18°C wb using R410A @ 6°C Evaporating

Notes

Units come as standard with left hand connections (in direction of airflow) but right hand are available at no extra charge. Filtration - All models with heating coils have G4 (panel) Class filtration all units with heating & cooling coils have G4 (panel) + F6 (bag) Class filtration.

The larger internal units are delivered in a number of sections which will assist in getting these units into plant room areas the number of sections are shown on the following pages (indicated as shipped in pcs) further details are shown on the General Arrangement drawings. These units will need bolting together on site (by others).

The noise levels shown are Sound power levels (dB(A)) at source you should note that the models with supply and extract fans (models E to L) may have different noise levels which is why they are shown separately.

For further details please refer to the Technical Manual, Data Sheets or General Arrangement drawings.

Type	Fan	Damper	Filter - G4 Panel	Filter - F6 Bag Rigid	Heating		Cooling DX R410A	Recoup	Wheel
					LTHW	Electric			
A	✓	✓	✓		✓				
B	✓	✓	✓			✓			
C	✓	✓	✓	✓	✓		✓		
D	✓	✓	✓	✓		✓	✓		
E	✓	✓	✓		✓			✓	
F	✓	✓	✓			✓		✓	
G	✓	✓	✓	✓	✓		✓	✓	
H	✓	✓	✓	✓		✓	✓	✓	
I	✓	✓	✓		✓				✓
J	✓	✓	✓			✓			✓
K	✓	✓	✓		✓		✓		✓
L	✓	✓	✓	✓		✓	✓		✓

Specification Tables Types A, B, C

VAP-L

Internally Mounted Air Handling Unit		Complete with LPHW heating coil			Type A	
		VAPLA1750AW	VAPLA3000AW	VAPLA4000AW	VAPLA7000AW	VAPLA9000AW
Air flow	m³/hr	1750	3000	4000	7000	9000
External Static	pa			250		
Dimensions	Length	mm	1400	1630	1480	1830
	Height	mm	790	890	890	1190
	Width	mm	654	754	1054	1354
Weight	Dry	kg	126	170	181	280
Shipped in	Pcs		1	1	1	1
Sound Power Level	Supply Fan	dB	79.9	83.1	81.1	81.1
Capacity	Heating	kW	14.54	23.94	34.24	60
Filter	Grade				G4	
Electrical Details	Power Supply	V			400	
		Hz			50	
		ph			3	
	Fan	kW	0.75	1.1	1.1	2.2
	Run Current	A	1.79	2.5	2.5	4.59
	Start Current	A	12.26	17.5	17.5	35.8
						46.42

Internally Mounted Air Handling Unit		Complete with Electric heating coil			Type B	Type C
		VAPLB1750AW	VAPLB3000AW	VAPLB4000AW	VAPLB7000AW	VAPLB9000AW
Air flow	m³/hr	1750	3000	4000	7000	9000
External Static	pa			250		
Dimensions	Length	mm	2030	2030	2080	2380
	Height	mm	790	890	890	1190
	Width	mm	654	754	1054	1354
Weight	Dry	kg	133	178	191	290
Shipped in	Pcs		1	1	1	1
Sound Power Level	Supply Fan	dB	79.8	82.9	80.9	81.1
Capacity	Heating	kW	15	24	36	60
Filter	Grade				G4	
Electrical Details	Power Supply	V			400	
		Hz			50	
		ph			3	
	Fan	kW	0.75	1.1	1.1	2.2
	Run Current	A	2.05	2.5	2.5	4.59
	Start Current	A	11.1	17.5	17.5	35.8
						46.43

Internally Mounted Air Handling Unit		Complete with LPHW heating coil & R410a DX Cooling coil			Type C
		VAPLC1750AW	VAPLC3000AW	VAPLC4000AW	VAPLC7000AW
Air flow	m³/hr	1750	3000	4000	7000
External Static	pa			250	
Dimensions	Length	mm	2330	2510	2560
	Height	mm	790	890	990
	Width	mm	754	854	954
Weight	Dry	kg	205	248	252
Shipped in	Pcs		1	2	2
Sound Power Level	Supply Fan	dB	82.2	81.6	82.5
Capacity	Cooling	kW	7.68	12.57	18.10
	Heating	kW	14.54	23.94	34.24
Filter	Grade				F6 + G4
Electrical Details	Power Supply	V			400
		Hz			50
		ph			3
	Fan	kW	0.55	1.1	1.5
	Run Current	A	1.27	2.31	3.05
	Start Current	A	8.84	17.09	24.1
					Recommendation for connection to Daikin condensing units
Condensing Unit		ERQ100A	ERQ125A	ERQ200A	2 x ERQ140A
Expansion Valve Kit		EKEXV63	EKEXV125	EKEXV200	2 x EKEXV140
Control box option		EKEQF	EKEQF	EKEQF	2 x EKEQF

Specification Tables Types D, E, F

VAP-L

Internally Mounted Air Handling Unit		Complete with Electric heating coil & R410a DX Cooling coil					Type D
		VAPLD1750AW	VAPLD3000AW	VAPLD4000AW	VAPLD7000AW	VAPLD9000AW	
Air flow	m ³ /hr	1750	3000	4000	7000	9000	
External Static	pa			250			
Dimensions	Length	mm	2440	2600	2630	2820	2970
	Height	mm	790	890	990	1190	1240
	Width	mm	754	854	954	1254	1354
Weight	Dry	kg	214	259	297	395	458
Shipped in	Pcs		1	2	2	2	2
Sound Power Level	Supply Fan	dB	82	81.5	82.3	85.9	85.9
Capacity	Cooling	kW	7.68	12.57	18.10	31.80	40.42
	Heating	kW	15	24	36	60	82.5
Filter	Grade			F6 + G4			
Electrical Details	Power Supply	V		400			
		Hz		50			
		ph		3			
	Fan	kW	0.55	1.1	1.5	2.2	3
	Run Current	A	1.27	2.31	3.05	4.28	6.19
	Start Current	A	8.84	17.01	24.1	35.52	46.43
Recommendation for connection to Daikin condensing units							
Condensing Unit		ERQ100A	ERQ125A	ERQ200A	2 x ERQ140A	2 x ERQ200A	
Expansion Valve Kit		EKEXV63	EKEXV125	EKEXV200	2 x EKEXV140	2 x EKEXV200	
Control box option		EKEQF	EKEQF	EKEQF	EKEQF	EKEQF	

Internally Mounted Air Handling Unit		Heat Recovery (Plate Heat Exchanger) Complete with LPHW heating coil					Type E
		VAPLE1750AW	VAPLE3000AW	VAPLE4000AW	VAPLE7000AW	VAPLE9000AW	
Air flow	m ³ /hr	1750	3000	4000	7000	9000	
External Static	pa			250			
Dimensions	Length	mm	2580	2780	2630	3280	3010
	Height	mm	1480	1680	1680	2280	2280
	Width	mm	654	754	1054	1054	1354
Weight	Dry	kg	538	548	616	810	910
Shipped in	Pcs			2			
Sound Power Level	Supply Fan	dB	82.3	85.2	83.5	82.9	86.5
	Return Fan	dB	82.1	85.1	83.4	82.8	86.5
Capacity	Heating	kW	14.54	23.94	34.24	60	76.97
Filter	Grade			G4			
Electrical Details	Power Supply	V		400			
		Hz		50			
		ph		3			
	Supply Fan	kW	1.1	1.5	1.5	3	4
	Run Current	A	2.31	3.19	3.19	6.19	7.81
	Start Current	A	17.09	22.6	22.6	46.42	56.23
	Return Fan	kW	1.1	1.1	1.5	3	4
	Run Current	A	2.31	2.5	3.19	6.19	7.81
	Start Current	A	17.09	17.5	22.6	46.42	56.23

Internally Mounted Air Handling Unit		Heat Recovery (Plate Heat Exchanger) Complete with Electric heating coil					Type F
		VAPLF1750AW	VAPLF3000AW	VAPLF4000AW	VAPLF7000AW	VAPLF9000AW	
Air flow	m ³ /hr	1750	3000	4000	7000	9000	
External Static	pa			250			
Dimensions	Length	mm	2580	2780	2730	3280	3060
	Height	mm	1480	1680	1680	2280	2280
	Width	mm	654	754	1054	1054	1354
Weight	Dry	kg	538	548	627	822	923
Shipped in	Pcs			2			
Sound Power Level	Supply Fan	dB	82.1	85	83.3	82.6	86.4
	Return Fan	dB	82.1	85.1	83.4	82.8	86.5
Capacity	Heating	kW	15	24	36	60	82.5
Filter	Grade			G4			
Electrical Details	Power Supply	V		400			
		Hz		50			
		ph		3			
	Supply Fan	kW	1.1	1.5	1.5	3	4
	Run Current	A	2.31	3.19	3.19	6.19	7.81
	Start Current	A	17.09	22.65	22.65	46.43	56.23
	Return Fan	kW	1.1	1.1	1.5	3	4
	Run Current	A	2.31	2.5	3.19	6.19	7.81
	Start Current	A	17.09	17.5	22.65	46.43	56.23

Specification Tables Types G, H, I

VAP-L

Internally Mounted Air Handling Unit		Heat Recovery Plate Heat Exchanger LPHW heating & R410a DX Cooling					Type G
		VAPLG1750AW	VAPLG3000AW	VAPLG4000AW	VAPLG7000AW	VAPLG9000AW	
Air flow	m³/hr	1750	3000	4000	7000	9000	
External Static	pa			250			
Dimensions	Length mm	3330	3650	3230	4480	4290	
	Height mm	1480	1680	1680	2280	2380	
	Width mm	754	854	1154	1254	1354	
Weight	Dry kg	503	603	659	990	1080	
Shipped in	Pcs		2			3	
Sound Power Level	Supply Fan dB	82.6	83.6	87.4	87.2	87.2	
	Return Fan dB	82.1	85.1	83.7	82.7	86.5	
Capacity	Cooling kW	4.02	6.47	10.02	17.83	21.82	
	Heating kW	14.54	23.94	34.24	60	76.97	
Filter	Grade			F6 + G4			
Electrical Details	Power Supply V			400			
	Hz			50			
	ph			3			
	Supply Fan kW	0.75	1.1	2.2	3	4	
	Run Current A	1.79	2.31	4.28	5.6	7.81	
	Start Current A	12.28	17.09	35.52	40.88	56.23	
	Return Fan kW	1.1	1.1	1.5	3	4	
	Run Current A	2.5	2.5	3.19	6.19	7.81	
	Start Current A	17.5	17.5	22.65	46.53	56.23	
Recommendation for connection to Daikin condensing units							
Condensing Unit		ERQ100A	ERQ100A	ERQ100A	ERQ200A	ERQ200A	
Expansion Valve Kit		EKEXV63	EKEXV63	EKEXV100	EKEXV200	EKEXV200	
Control box option		EKEQF	EKEQF	EKEQF	EKEQF	EKEQF	

Internally Mounted Air Handling Unit		Heat Recovery Plate Heat Exchanger Electric heating & R410a DX Cooling					Type H
		VAPLH1750AW	VAPLH3000AW	VAPLH4000AW	VAPLH7000AW	VAPLH9000AW	
Air flow	m³/hr	1750	3000	4000	7000	9000	
External Static	pa			250			
Dimensions	Length mm	3580	3830	3480	4480	4340	
	Height mm	1480	1680	1680	2280	2380	
	Width mm	754	854	1154	1254	1354	
Weight	Dry kg	510	620	670	990	1080	
Shipped in	Pcs		2			3	
Sound Power Level	Supply Fan dB	82	84.8	87.3	87.2	88.4	
	Return Fan dB	84	82.5	83.7	84.2	83.1	
Capacity	Cooling kW	4.02	6.47	10.02	17.83	21.82	
	Heating kW	15	24	36	60	82.5	
Filter	Grade			F6 + G4			
Electrical Details	Power Supply V			400			
	Hz			50			
	ph			3			
	Supply Fan kW	0.75	1.1	2.2	3	4	
	Run Current A	1.79	2.31	4.28	6.19	7.11	
	Start Current A	12.28	17.09	26.96	46.42	50.48	
	Return Fan kW	1.1	1.1	1.5	3	3	
	Run Current A	2.5	2.5	3.19	6.19	6.19	
	Start Current A	17.5	17.5	22.6	46.42	46.53	
Recommendation for connection to Daikin condensing units							
Condensing Unit		ERQ100A	ERQ100A	ERQ100A	ERQ200A	ERQ200A	
Expansion Valve Kit		EKEXV63	EKEXV63	EKEXV100	EKEXV200	EKEXV200	
Control box option		EKEQF	EKEQF	EKEQF	EKEQF	EKEQF	

Internally Mounted Air Handling Unit		Heat Recovery (Thermal Wheel) Complete with LPHW heating coil					Type I
		VAPLI4000AW	VAPLI7000AW	VAPLI9000AW			
Air flow	m³/hr	4000	7000	9000			
External Static	pa		250				
Dimensions	Length mm	2630	2840	2960			
	Height mm	1680	2080	2280			
	Width mm	1154	1354	1454			
Weight	Dry kg	649	826	997			
Shipped in	Pcs	3	3	3			
Sound Power Level	Supply Fan dB	83.6	91.1	86.4			
	Return Fan dB	83.2	91.2	86.2			
Capacity	Heating kW	34.24	60	76.97			
Filter	Grade		G4				
Electrical Details	Power Supply V		400				
	Hz		50				
	ph		3				
	Supply Fan kW	1.5	3	4			
	Run Current A	3.19	6.19	7.81			
	Start Current A	22.6	46.43	56.23			
	Return Fan kW	1.5	3	4			
	Run Current A	3.19	6.19	7.81			
	Start Current A	22.6	46.43	56.23			

Specification Tables Types J, K, L

VAP-L

Internally Mounted Air Handling Unit			Heat Recovery (Thermal Wheel) Complete with Electric heating coil			Type J
			VAPLJ4000AW	VAPLJ7000AW	VAPLJ9000AW	
Air flow	m ³ /hr		4000	7000	9000	
External Static	pa			250		
Dimensions	Length	mm	2630	2840	2960	
	Height	mm	1680	2080	2280	
	Width	mm	1154	1354	1454	
Weight	Dry	kg	649	872	997	
Shipped in		Pcs		2		
Sound Power Level	Supply Fan	dB	83.4	82.1	86.3	
	Return Fan	dB	83.2	82	86.2	
Capacity	Heating	kW	36	60	82.5	
Filter	Grade			G4		
Electrical Details	Power Supply	V		400		
		Hz		50		
		ph		3		
	Supply Fan	kW	1.5	3	4	
	Run Current	A	3.19	6.19	7.81	
	Start Current	A	22.65	46.43	56.23	
	Return Fan	kW	1.5	3	4	
	Run Current	A	3.19	6.19	7.81	
	Start Current	A	22.65	46.43	56.23	

Internally Mounted Air Handling Unit			Heat Recovery (Thermal Wheel) LPHW heating & R410a DX Cooling coil			Type K
			VAPLK4000AW	VAPLK7000AW	VAPLK9000AW	
Air flow	m ³ /hr		4000	7000	9000	
External Static	pa			250		
Dimensions	Length	mm	3330	3540	3610	
	Height	mm	1680	2080	2280	
	Width	mm	1154	1354	1454	
Weight	Dry	kg	649	948	1065	
Shipped in		Pcs		2	3	
Sound Power Level	Supply Fan	dB	87.3	86.9	91.2	
	Return Fan	dB	83.2	82	86.2	
Capacity	Cooling	kW	5.15	9.02	11.6	
	Heating	kW	34.24	60	76.97	
Filter	Grade			F6 + G4		
Electrical Details	Power Supply	V		400		
		Hz		50		
		ph		3		
	Supply Fan	kW	2.2	3	4	
	Run Current	A	4.28	5.6	7.11	
	Start Current	A	35.52	40.88	50.48	
	Return Fan	kW	1.5	3	4	
	Run Current	A	3.19	6.19	7.81	
	Start Current	A	22.6	46.43	56.23	

Recommendation for connection to Daikin condensing units

Condensing Unit	ERQ100A	ERQ100A	ERQ125A
Expansion Valve Kit	EKEXV63	EKEXV80	EKEXV100
Control box option	EKEQF	EKEQF	EKEQF

Internally Mounted Air Handling Unit			Heat Recovery (Thermal Wheel) Electric heating & R410a DX Cooling coil			Type L
			VAPLL4000AW	VAPLL7000AW	VAPLL9000AW	
Air flow	m ³ /hr		4000	7000	9000	
External Static	pa			250		
Dimensions	Length	mm	3610	3680	3730	
	Height	mm	1680	2080	2280	
	Width	mm	1154	1354	1454	
Weight	Dry	kg	649	971	1065	
Shipped in		Pcs		2	3	
Sound Power Level	Supply Fan	dB	87.3	86.9	91.1	
	Return Fan	dB	83.2	82	86.2	
Capacity	Cooling	kW	5.15	9.02	11.6	
	Heating	kW	36	60	82.5	
Filter	Grade			F6 + G4		
Electrical Details	Power Supply	V		400		
		Hz		50		
		ph		3		
	Supply Fan	kW	2.2	3	4	
	Run Current	A	4.28	5.6	7.11	
	Start Current	A	35.52	40.88	50.48	
	Return Fan	kW	1.5	3	4	
	Run Current	A	3.19	6.19	7.81	
	Start Current	A	22.65	46.43	56.23	

Recommendation for connection to Daikin condensing units

Condensing Unit	ERQ100A	ERQ100A	ERQ125A
Expansion Valve Kit	EKEXV63	EKEXV80	EKEXV100
Control box option	EKEQF	EKEQF	EKEQF

Specification Tables Types A, B, C

VAW-L

Externally Mounted Air Handling Unit		Complete with LPHW heating coil			Type A	
		VAWLA1750AW	VAWLA3000AW	VAWLA4000AW	VAWLA7000AW	VAWLA9000AW
Air flow	m³/hr	1750	3000	4000	7000	9000
External Static	pa			250		
Dimensions	Length	mm	1600	1670	1750	1900
	Height	mm	790	890	890	1190
	Width	mm	654	754	1054	1354
Weight	Delivered Dry	kg	176	176	222	289
Shipped in	Pcs	1	1	1	1	1
Sound Power Level	Supply Fan	dB	79.9	83.4	81.3	81.3
Capacity	Heating	kW	14.54	23.94	34.24	60
Filter	Grade				G4	
Electrical Details	Power Supply	V			400	
		Hz			50	
		ph			3	
	Fan	kW	0.75	1.1	1.5	2.2
	Run Current	A	2.06	2.5	3.19	4.59
	Start Current	A	11.1	17.5	22.6	35.8
						46.42

Externally Mounted Air Handling Unit		Complete with Electric heating coil			Type B	
		VAWLBB1750AW	VAWLBB3000AW	VAWLBB4000AW	VAWLBB7000AW	VAWLBB9000AW
Air flow	m³/hr	1750	3000	4000	7000	9000
External Static	pa			250		
Dimensions	Length	mm	2070	2130	2090	2380
	Height	mm	790	890	890	1190
	Width	mm	654	754	1054	1354
Weight	Delivered Dry	kg	137	182	203	289
Shipped in	Pcs	1	1	1	1	1
Sound Power Level	Supply Fan	dB	80.2	83.2	81.1	81.1
Capacity	Heating	kW	15	24	36	60
Filter	Grade				G4	
Electrical Details	Power Supply	V			400	
		Hz			50	
		ph			3	
	Fan	kW	0.75	1.1	1.1	2.2
	Run Current	A	2.06	2.5	2.5	4.59
	Start Current	A	11.1	17.5	17.5	35.8
						46.42

Externally Mounted Air Handling Unit		Complete with LPHW heating coil & R410a DX Cooling coil			Type C	
		VAWLCC1750AW	VAWLCC3000AW	VAWLCC4000AW	VAWLCC7000AW	VAWLCC9000AW
Air flow	m³/hr	1750	3000	4000	7000	9000
External Static	pa			250		
Dimensions	Length	mm	2350	2400	2400	2550
	Height	mm	790	890	990	1190
	Width	mm	754	854	954	1254
Weight	Delivered Dry	kg	213	252	290	385
Shipped in	Pcs	1	1	1	1	1
Sound Power Level	Supply Fan	dB	82.3	81.8	82.6	86
Capacity	Cooling	kW	7.68	12.57	18.10	31.80
	Heating	kW	14.54	23.94	34.24	60
Filter	Grade				F6 + G4	
Electrical Details	Power Supply	V			400	
		Hz			50	
		ph			3	
	Fan	kW	0.55	1.1	1.5	2.2
	Run Current	A	1.27	2.31	3.05	4.28
	Start Current	A	8.84	17.09	24.1	35.52
						46.43
Recommendation for connection to Daikin condensing units						
Condensing Unit		ERQ100A	ERQ125A	ERQ200A	2 x ERQ140A	2 x ERQ200A
Expansion Valve Kit		EKEXV63	EKEXV125	EKEXV200	2 x EKEXV140	2 x EKEXV200
Control box option		EKEQF	EKEQF	EKEQF	2 x EKEQF	2 x EKEQF

Specification Tables Types D, E, F

VAW-L

Externally Mounted Air Handling Unit		Complete with Electric heating coil & R410a DX Cooling coil					Type D
		VAWL1750AW	VAWL3000AW	VAWL4000AW	VAWL7000AW	VAWL9000AW	
Air flow	m ³ /hr	1750	3000	4000	7000	9000	
External Static	pa			250			
Dimensions	Length	mm	2560	2630	2680	2850	2980
	Height	mm	790	890	990	1190	1240
	Width	mm	754	854	954	1254	1354
Weight	Delivered Dry	kg	219	259	298	385	447
Shipped in	Pcs	1	1	1	1	1	
Sound Power Level	Supply Fan	dB	82.2	81.7	82.5	86	86
Capacity	Cooling	kW	7.68	12.57	18.10	31.80	40.42
	Heating	kW	15	24	36	60	82.5
Filter	Grade			F6 + G4			
Electrical Details	Power Supply	V		400			
		Hz		50			
		ph		3			
	Fan	kW	0.55	1.1	1.5	2.2	3
	Run Current	A	1.27	2.31	3.05	4.59	6.19
	Start Current	A	8.84	17.09	24.1	35.8	46.43
Recommendation for connection to Daikin condensing units							
Condensing Unit		ERQ100A	ERQ125A	ERQ200A	2 x ERQ140A	2 x ERQ200A	
Expansion Valve Kit		EKEXV63	EKEXV125	EKEXV200	2 x EKEXV140	2 x EKEXV200	
Control box option		EKEQF	EKEQF	EKEQF	EKEQF	EKEQF	

Externally Mounted Air Handling Unit		Heat Recovery (Plate Heat Exchanger) with LPHW heating coil					Type E
		VAWLE1750AW	VAWLE3000AW	VAWLE4000AW	VAWLE7000AW	VAWLE9000AW	
Air flow	m ³ /hr	1750	3000	4000	7000	9000	
External Static	pa			250			
Dimensions	Length	mm	2550	2900	2750	3480	3130
	Height	mm	1480	1680	1680	2280	2280
	Width	mm	654	754	1054	1054	1354
Weight	Delivered Dry	kg	380	555	655	830	940
Shipped in	Pcs	1	1	1	1	1	
Sound Power Level	Supply Fan	dB	82.7	85.5	83.7	83.2	86.7
	Return Fan	dB	82.4	85.4	83.6	83	86.7
Capacity	Heating	kW	14.54	23.94	34.24	60	76.97
Filter	Grade			G4			
Electrical Details	Power Supply	V		400			
		Hz		50			
		ph		3			
	Supply Fan	kW	1.1	1.5	2.2	3	4
	Run Current	A	2.31	3.19	4.59	6.19	7.81
	Start Current	A	17.09	22.33	35.6	46.42	56.23
	Return Fan	kW	1.1	1.5	1.5	3	4
	Run Current	A	2.31	3.19	3.19	6.19	7.81
	Start Current	A	17.09	22.65	22.6	46.42	56.23

Externally Mounted Air Handling Unit		Heat Recovery (Plate Heat Exchanger) with Electric heating coil					Type F
		VAWLF1750AW	VAWLF3000AW	VAWLF4000AW	VAWLF7000AW	VAWLF9000AW	
Air flow	m ³ /hr	1750	3000	4000	7000	9000	
External Static	pa			250			
Dimensions	Length	mm	2600	2900	2850	3400	3180
	Height	mm	1480	1680	1680	2280	2280
	Width	mm	654	754	1054	1054	1354
Weight	Delivered Dry	kg	382	570	645	850	960
Shipped in	Pcs	1	1	1	1	1	
Sound Power Level	Supply Fan	dB	82.5	85.3	83.5	82.9	86.6
	Return Fan	dB	82.4	85.4	90.1	83	86.7
Capacity	Heating	kW	15	24	36	60	82.5
Filter	Grade			G4			
Electrical Details	Power Supply	V		400			
		Hz		50			
		ph		3			
	Supply Fan	kW	1.1	1.5	1.5	3	4
	Run Current	A	2.31	3.19	3.19	6.19	7.81
	Start Current	A	17.09	22.65	22.65	46.43	56.23
	Return Fan	kW	1.1	1.5	1.5	3	4
	Run Current	A	2.31	3.19	3.19	6.19	7.81
	Start Current	A	17.09	22.65	22.65	46.43	56.23

Specification Tables Types G, H, I

VAW-L

Externally Mounted Air Handling Unit		Heat Recovery Plate Heat Exchange LPHW heating & R410a DX Cooling					Type G
		VAWLG1750AW	VAWLG3000AW	VAWLG4000AW	VAWLG7000AW	VAWLG9000AW	
Air flow	m³/hr	1750	3000	4000	7000	9000	
External Static	pa			250			
Dimensions	Length mm	3350	3750	3350	4350	4350	
	Height mm	1480	1680	1680	2280	2380	
	Width mm	754	854	1154	1254	1354	
Weight	Delivered Dry kg	522	630	683	1005	1105	
Shipped in	Pcs	1	1	1	1	1	
Sound Power Level	Supply Fan dB	84.2	83.8	87.5	87.3	87.3	
	Return Fan dB	82.5	85.3	83.8	82.9	86.7	
Capacity	Cooling kW	4.02	6.47	10.02	17.83	21.82	
	Heating kW	14.54	23.94	34.24	60	76.97	
Filter	Grade			F6 + G4			
Electrical Details	Power Supply V			400			
	Hz			50			
	ph			3			
	Supply Fan kW	0.75	1.1	2.2	3	4	
	Run Current A	1.79	2.31	4.28	5.6	7.81	
	Start Current A	12.28	17.09	35.52	40.88	56.23	
	Return Fan kW	1.1	1.5	1.5	3	4	
	Run Current A	2.5	3.19	3.19	6.19	7.81	
	Start Current A	17.5	22.65	22.65	46.53	56.23	
Recommendation for connection to Daikin condensing units							
Condensing Unit		ERQ100A	ERQ100A	ERQ100A	ERQ200A	ERQ200A	
Expansion Valve Kit		EKEXV63	EKEXV63	EKEXV100	EKEXV200	EKEXV200	
Control box option		EKEQF	EKEQF	EKEQF	EKEQF	EKEQF	

Externally Mounted Air Handling Unit		Heat Recovery Plate Heat Exchanger Electric heating & R410a DX Cooling					Type H
		VAWLH1750AW	VAWLH3000AW	VAWLH4000AW	VAWLH7000AW	VAWLH9000AW	
Air flow	m³/hr	1750	3000	4000	7000	9000	
External Static	pa			250			
Dimensions	Length mm	3600	3950	3600	4450	4500	
	Height mm	1480	1680	1680	2280	2380	
	Width mm	754	854	1154	1254	1354	
Weight	Delivered Dry kg	525	640	695	1030	1220	
Shipped in	Pcs	1	1	1	1	1	
Sound Power Level	Supply Fan dB	84.2	85	87.4	87.3	85.6	
	Return Fan dB	82.2	82.8	83.8	84.2	83.3	
Capacity	Cooling kW	4.02	6.47	10.02	17.83	21.82	
	Heating kW	15	24	36	60	82.5	
Filter	Grade			F6 + G4			
Electrical Details	Power Supply V			400			
	Hz			50			
	ph			3			
	Supply Fan kW	0.75	1.5	2.2	3	4	
	Run Current A	1.79	3.05	4.28	6.19	7.81	
	Start Current A	12.28	24.01	26.96	46.42	56.23	
	Return Fan kW	1.1	1.1	1.5	3	4	
	Run Current A	2.5	2.5	3.19	6.19	7.81	
	Start Current A	17.5	17.5	22.6	46.42	56.23	
Recommendation for connection to Daikin condensing units							
Condensing Unit		ERQ100A	ERQ100A	ERQ100A	ERQ200A	ERQ200A	
Expansion Valve Kit		EKEXV63	EKEXV63	EKEXV100	EKEXV200	EKEXV200	
Control box option		EKEQF	EKEQF	EKEQF	EKEQF	EKEQF	

Externally Mounted Air Handling Unit		Heat Recovery (Thermal Wheel) Complete with LPHW heating coil					Type I
		VAWL14000AW	VAWL17000AW	VAWL19000AW			
Air flow	m³/hr	4000		7000		9000	
External Static	pa			250			
Dimensions	Length mm	2650		2860		2980	
	Height mm	1680		2080		2280	
	Width mm	1154		1354		1454	
Weight	Delivered Dry kg	705		930		1060	
Shipped in	Pcs	1		1		1	
Sound Power Level	Supply Fan dB	83.8		82.4		86.5	
	Return Fan dB	83.3		82.1		86.3	
Capacity	Heating kW	34.24		60		76.97	
Filter	Grade			G4			
Electrical Details	Power Supply V			400			
	Hz			50			
	ph			3			
	Supply Fan kW	2.2		3		4	
	Run Current A	4.59		6.19		7.81	
	Start Current A	35.8		46.43		56.23	
	Return Fan kW	1.5		3		4	
	Run Current A	3.19		6.19		7.81	
	Start Current A	22.6		46.43		56.23	

Specification Tables Types J, K, L

VAW-L

Externally Mounted Air Handling Unit			Heat Recovery (Thermal Wheel) Complete with Electric heating coil			Type J
			VAWLJ4000AW	VAWLJ7000AW	VAWLJ9000AW	
Air flow	m ³ /hr		4000	7000	9000	
External Static	pa			250		
Dimensions	Length	mm	2650	2860	2980	
	Height	mm	1680	2080	2280	
	Width	mm	1154	1354	1454	
Weight	Delivered Dry	kg	664	940	1070	
Shipped in	Pcs		1	1	1	
Sound Power Level	Supply Fan	dB	83.6	82.2	86.4	
	Return Fan	dB	83.3	82.1	86.3	
Capacity	Heating	kW	36	60	82.5	
Filter	Grade			G4		
Electrical Details	Power Supply	V		400		
		Hz		50		
		ph		3		
	Supply Fan	kW	1.5	3	4	
	Run Current	A	3.19	6.19	7.81	
	Start Current	A	22.6	46.43	56.23	
	Return Fan	kW	1.5	3	4	
	Run Current	A	3.19	6.19	7.81	
	Start Current	A	22.6	46.43	56.23	

Externally Mounted Air Handling Unit			Heat Recovery (Thermal Wheel) LPHW heating & R410a DX Cooling coil			Type K
			VAWLK4000AW	VAWLK7000AW	VAWLK9000AW	
Air flow	m ³ /hr		4000	7000	9000	
External Static	pa			250		
Dimensions	Length	mm	3350	2560	3630	
	Height	mm	1680	2080	2280	
	Width	mm	1154	1354	1454	
Weight	Delivered Dry	kg	758	992	1130	
Shipped in	Pcs		1	1	1	
Sound Power Level	Supply Fan	dB	87.5	87	91.2	
	Return Fan	dB	83.3	82.1	86.3	
Capacity	Cooling	kW	5.15	9.02	11.6	
	Heating	kW	34.24	60	76.97	
Filter	Grade			F6 + G4		
Electrical Details	Power Supply	V		400		
		Hz		50		
		ph		3		
	Supply Fan	kW	2.2	3	4	
	Run Current	A	4.28	5.6	7.11	
	Start Current	A	35.52	40.88	50.48	
	Return Fan	kW	1.5	3	4	
	Run Current	A	3.19	6.19	7.81	
	Start Current	A	22.6	46.43	56.23	
Recommendation for connection to Daikin condensing units						
Condensing Unit			ERQ100A	ERQ100A	ERQ125A	
Expansion Valve Kit			EKEXV63	EKEXV80	EKEXV100	
Control box option			EKEQF	EKEQF	EKEQF	

Externally Mounted Air Handling Unit			Heat Recovery (Thermal Wheel) Electric heating & R410a DX Cooling coil			Type L
			VAWL4000AW	VAWL7000AW	VAWL9000AW	
Air flow	m ³ /hr		4000	7000	9000	
External Static	pa			250		
Dimensions	Length	mm	3630	3700	3750	
	Height	mm	1680	2080	2280	
	Width	mm	1154	1354	1454	
Weight	Delivered Dry	kg	762	971	1133	
Shipped in	Pcs		1	1	1	
Sound Power Level	Supply Fan	dB	87.4	86.9	91.2	
	Return Fan	dB	83.3	82.1	86.3	
Capacity	Cooling	kW	5.15	9.02	11.6	
	Heating	kW	36	60	82.5	
Filter	Grade			F6 + G4		
Electrical Details	Power Supply	V		400		
		Hz		50		
		ph		3		
	Supply Fan	kW	2.2	3	4	
	Run Current	A	4.28	5.6	7.11	
	Start Current	A	35.52	40.88	50.48	
	Return Fan	kW	1.5	3	4	
	Run Current	A	3.19	6.19	7.81	
	Start Current	A	22.65	46.43	56.23	
Recommendation for connection to Daikin condensing units						
Condensing Unit			ERQ100A	ERQ100A	ERQ125A	
Expansion Valve Kit			EKEXV63	EKEXV80	EKEXV100	
Control box option			EKEQF	EKEQF	EKEQF	



In order to realise maximum efficiency, commercial air conditioning systems must be subject to precise, 24 hour control.

Daikin manufactures and markets a complete suite of advanced computerised central control and monitoring systems designed to simplify air conditioning management and reduce energy usage running costs.

Daikin computerised control systems not only provide the highly sophisticated regulation and day to day monitoring necessary for modern, hi tech air conditioning installations – they also provide owners, landlords and tenants of commercial buildings with valuable performance data on consumption as well as a wide range of operating parameters.

Dedicated Daikin central control can be applied to both VRV® and mixed VRV®/Sky Air and Split installations with up to 1,024 indoor units and can also be integrated with building management systems.

Control Systems

INDIVIDUAL CONTROL SYSTEMS

Wired remote control	180
Infrared remote control	180
Simplified remote control	180
Simplified built-in remote control for hotel applications	180

CENTRALISED CONTROL SYSTEMS

Centralised remote control	181
Unified on/off control	181
Schedule timer	181

NETWORK SOLUTIONS

DS-net	182
Free Cooling Function	183
Intelligent Touch Controller	184
Intelligent Manager	185
DMS-IF	186
BACnet Gateway	186
DNSS EcoSave	188

INDIVIDUAL CONTROL SYSTEMS



BRC1D52

Wired remote control

- ▶ Limit operation (min/max): room temperature is controlled within adjustable upper and lower limits. Limit operation can be activated manually or by schedule timer
- ▶ Real time clock: indicates real time and day
- ▶ Schedule timer:
 - It is possible to programme a weekly schedule timer
 - It is possible to programme the remote control for each day of the week.
- ▶ Home Leave operation: in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- ▶ Different levels of user access can be selected as follows:
 - Level 1: all buttons are accessible
 - Level 2: all buttons are disabled except for: ON/OFF, set temperature up/down, fan speed, cooling/heating mode, enable/disable schedule timer, air flow direction adjustment button

- Level 3: all buttons are disabled except for: ON/OFF, set temperature up/down, fan speed
- ▶ User friendly HRV function, thanks to the introduction of a button for ventilation mode and fan speed
- ▶ Constantly monitoring of the system for malfunctions in a total of 80 components
- ▶ Immediate display of fault location and condition
- ▶ Reduction of maintenance time and costs

Operation buttons: ON/OFF, timer mode start/stop, timer on/off, programmed time, temperature setting, air flow direction adjustment, operating mode selection, fan speed control, filter sign reset, inspection test/operation

Display: Operating mode, Heat Recovery Ventilation (HRV) in operation, cool/heat changeover control, centralised control indication, group control indication, set temperature, air flow direction, programmed time, inspection/test operation, fan speed, clean air filter, defrost/hot start, malfunction

BRC4*/BRC7*

Infrared remote control

Operation buttons: ON/OFF, timer mode start/stop, timer mode on/off, programme time, temperature setting, air flow direction (FXHQ, FXFQ, FXCQ and FXAQ models only), operating mode, fan speed control, filter sign reset, inspection / test indication

Display: Operating mode, battery change, set temperature, air flow direction (FXHQ, FXFQ, FXCQ and FXAQ models only), programmed time, inspection/test operation, fan speed

BRC2C51

Simplified remote control

Simple, compact and easy to operate unit, suitable for use in hotel bedrooms

Operation buttons: ON/OFF, operating mode selection, fan speed control, temperature setting

Display: Cool/heat changeover control, Heat Recovery Ventilation (HRV) in operation, set temperature, operating mode, centralised control indication, fan speed, defrost/hot start, malfunction adjustment, operating mode selection, fan speed control, filter sign reset, inspection test/operation

BRC3A61

Simplified built-in remote control for hotel applications

Compact, user friendly unit, ideal for use in hotel bedrooms

Operation buttons: ON/OFF, fan speed control, temperature setting

Display: Heat Recovery Ventilation (HRV) in operation, set temperature, operating mode, centralised control indication, fan speed, defrost/hot start, malfunction

CENTRALISED CONTROL SYSTEMS

Centralised control of the VRV® system can be achieved via 3 user friendly compact controls: centralised remote control, unified on/off control and schedule timer. These controls may be used independently or in combination where 1 group = several (up to 16) indoor units in combination and 1 zone = several groups in combination.

A centralised remote control is ideal for use in tenanted commercial buildings subject to random occupation, enabling indoor units to be classified in groups per tenant (zoning). The schedule timer programmes the schedule and operation conditions for each tenant and the control can easily be reset according to varying requirements.



DCS302C51



DCS301B51



DST301B51

DCS302C51

Centralised remote control

Providing individual control of 64 groups (zones) of indoor units.

- a maximum of 64 groups (128 indoor units, max. 10 outdoor units) can be controlled
- a maximum of 128 groups (128 indoor units, max. 10 outdoor units) can be controlled via 2 centralised remote controls in separate locations
- zone control
- group control
- malfunction code display
- maximum wiring length of 1,000m (total: 2,000m)
- air flow direction and air flow rate of HRV can be controlled
- expanded timer function

DCS301B51

Unified ON/OFF control

Providing simultaneous and individual control of 16 groups of indoor units.

- a maximum of 16 groups (128 indoor units) can be controlled
- 2 remote controls in separate locations can be used
- operating status indication (normal operation, alarm)
- centralised control indication
- maximum wiring length of 1,000m (total: 2,000m)

DST301B51

Schedule timer


Enabling 64 groups to be programmed.

- a maximum of 128 indoor units can be controlled
- 8 types of weekly schedule
- a maximum of 48 hours back up power supply
- a maximum wiring length of 1,000m (total: 2,000m)

NETWORK SOLUTIONS



The ideal solution for control and management up to 2,000 Sky Air and/or VRV® indoor units

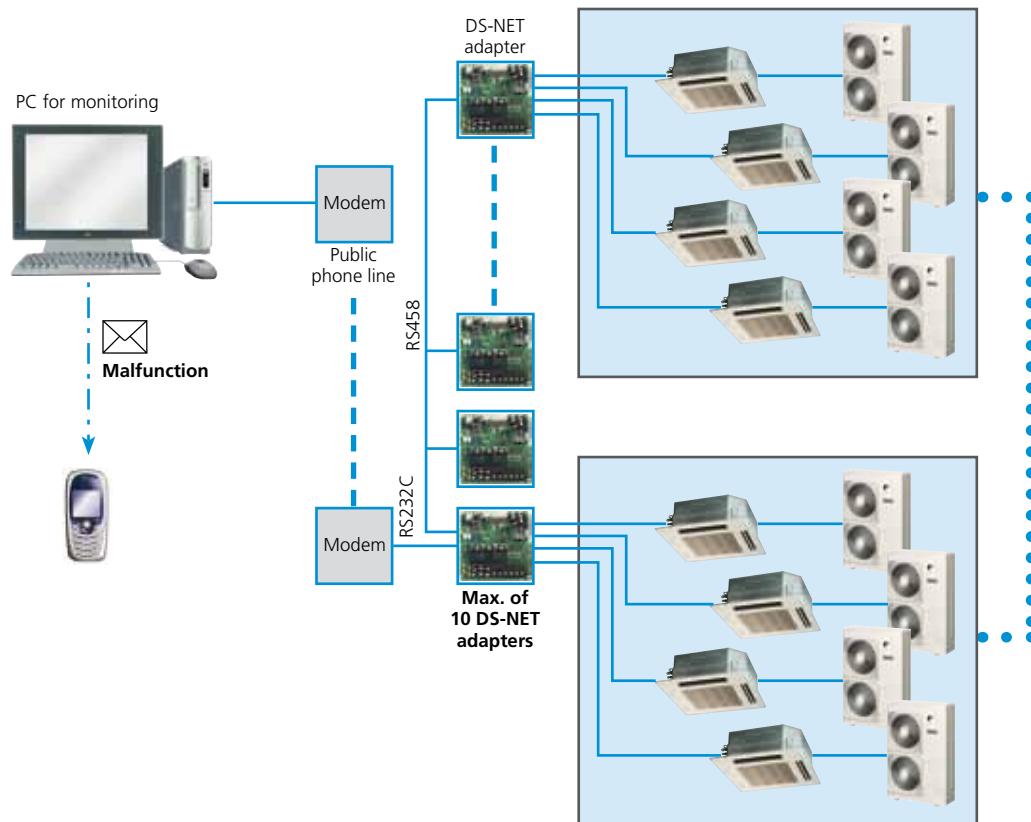

Application area

- A small commercial area of less than 40 indoor units.
- Critical applications for centralized monitoring.

System layout

- Allows monitoring and control of up to 50 stores or sites and 2,000 indoor units with just one modem and phone line.
- Automates daily air conditioning operation in order to free users from the hassle of air conditioning operation/management.
- The daily schedule setting allows automatic operation afterward.
- Automates alarm (report messages) for any malfunctions / errors. Immediate report of any indoor unit breakdown to the servicing company.
- Automatic report of breakdown/ malfunction information.
- Minimizes the inconvenience of not having air conditioning via rapid messages

Functions

- Schedule setup (Daily schedule)
 - Start/Stop
- Air conditioning malfunction report
 - Send message to monitoring system
- Manual operation
 - Start/Stop, Set temperature, Operation mode, Fan speed
- Status monitoring (Start/Stop, Set temperature, Operation mode, Room temperature, Operation time, Error code)


NETWORK SOLUTIONS

Free Cooling function



The combined application of the VRV system with VAM Heat Recovery Ventilation units can be greatly enhanced with the use of the Intelligent Touch Controller with it's optional software which can support free cooling interlock with the VAM units providing cooling whilst restricting the VRV Indoor Units whenever the external temperature is within free cooling limits.

Advantages

- Reduces the energy consumption and uses energy in a more efficient way, by directly introduction of fresh air into rooms.
- Maintains indoor comfort through the introduction of low temperature outdoor air.

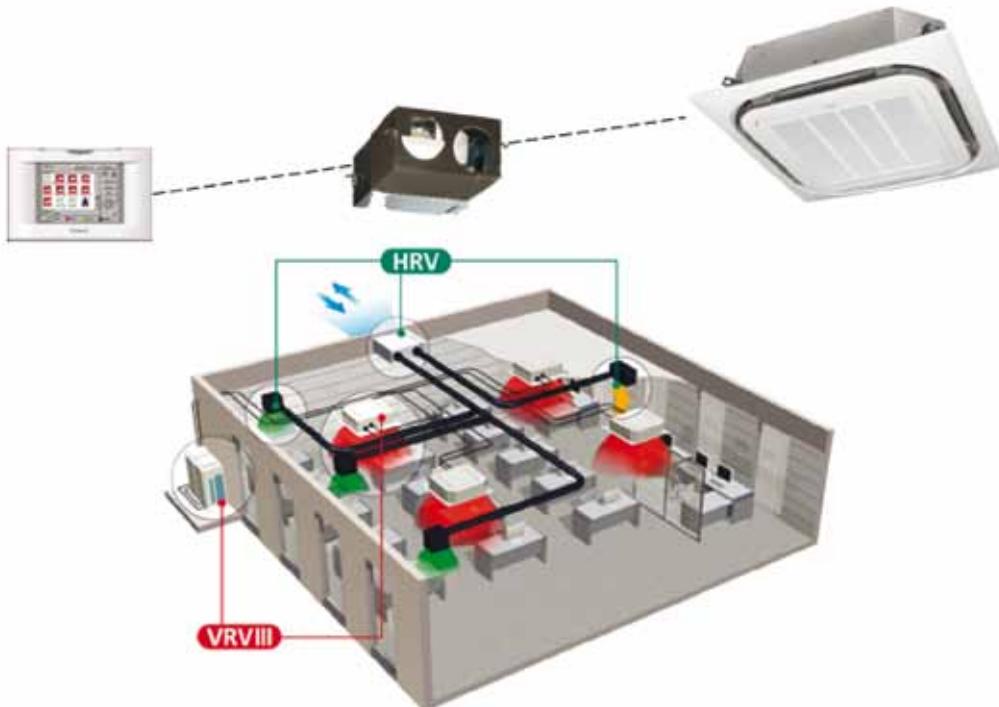

Free cooling function is possible when the outdoor temperature is less than the indoor room temperature

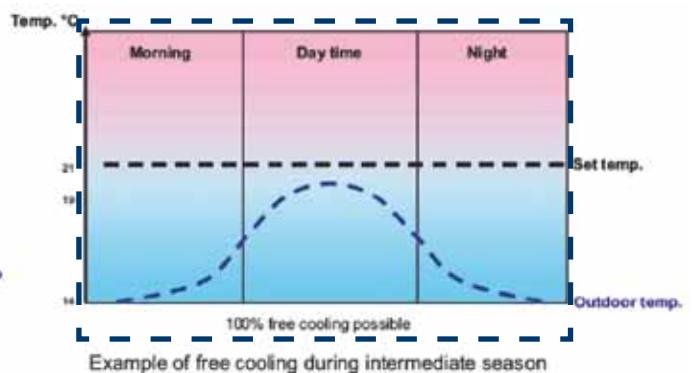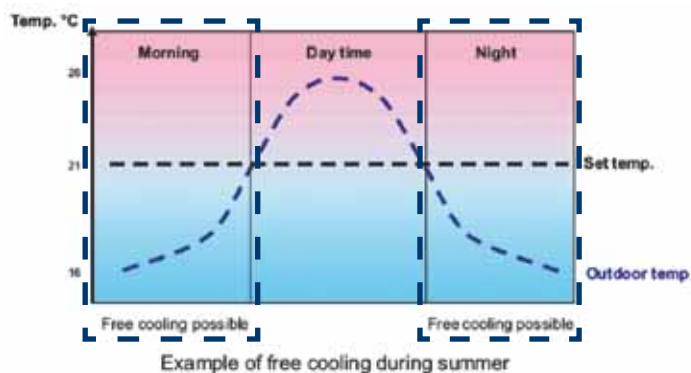


To perform this feature the Intelligent Touch Controller is required with the Free Cooling Software Update and also the use of the optional Outdoor Temperature Sensor Kit DAM101A51.

NETWORK SOLUTIONS



Allows detailed & easy monitoring and operation of VRV® systems (max. 2 X 64 groups/indoor units).

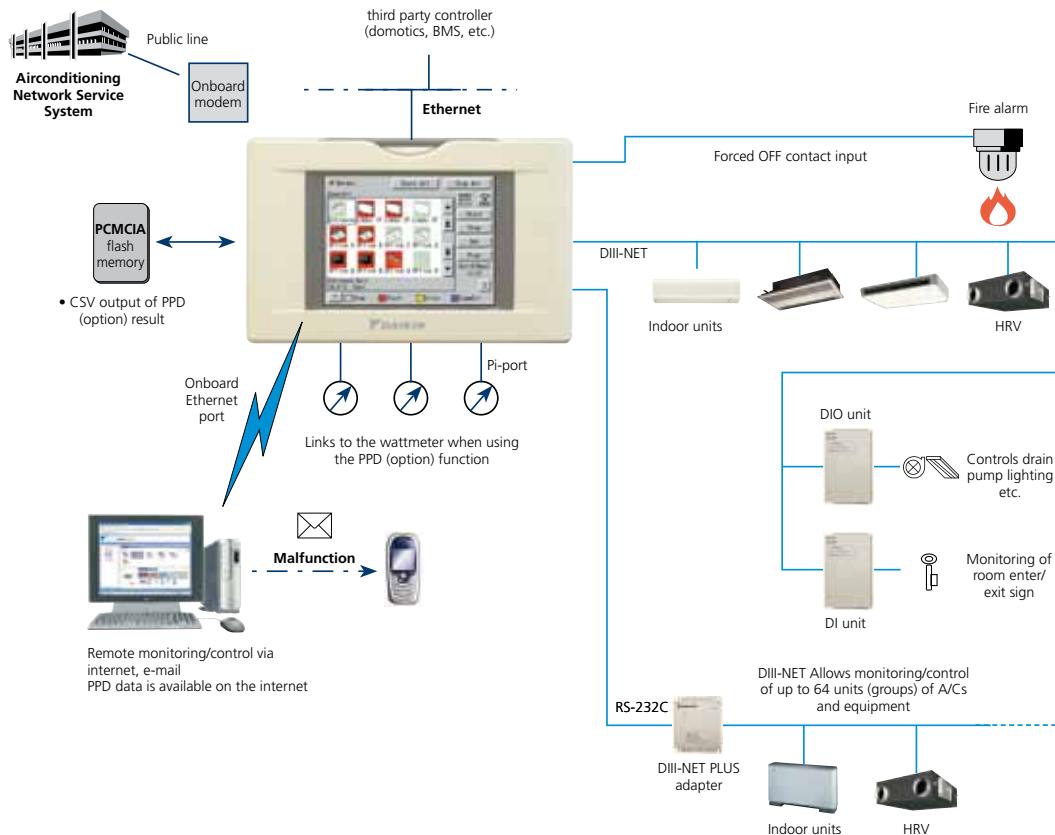

Languages

- English
- French
- Spanish
- German
- Italian
- Dutch
- Portuguese

System layout

- Up to 2 x 64 indoor units can be controlled
- Onboard Ethernet port (web browser + e-mail)
- Digital i/o contacts (option)
- Touch panel (full colour LCD via icon display)

Management

- Web application & internet compatibility
- Monitoring & control according to user
- Remote monitoring & control of more than one building
- Remote monitoring & control of more than one building via internet
- Power Proportional Distribution: PPD (option)
- PPD data is available on the internet
- Easy management of electricity consumption
- Enhanced history function

Control

- Individual control (set point, start/stop, fan speed) (max. 2 x 64 groups/indoor units)
- Enhanced scheduling function (8 schedules, 17 patterns)
- Flexible grouping in zones
- Yearly schedule
- Fire emergency stop control
- Interlocking control
- Increased HRV monitoring and control function
- Automatic cooling / heating change-over
- Heating optimization
- Temperature limit
- Password security: 3 levels (general, administration & service)
- Quick selection and full control
- Simple navigation
- Set back schedule ↳ new

Monitoring

- Visualisation via Graphical User Interface (GUI)
- Icon colour display change function
- Indoor units operation mode
- Error messages via e-mail & mobile phone (option)
- Indication filter replacement
- Multi PC

Cost performance

- Free cooling function ↳ new
- Labour saving
- Easy installation
- Compact design: limited installation space
- Overall energy saving

Open interface

- Communication to any third party controller (domotics, BMS, etc.) is possible via open interface


Connectable to:

- | | |
|--------|-----------------------------------|
| • VRV® | • Sky Air (via interface adapter) |
| • HRV | • Split (via interface adapter) |

NETWORK SOLUTIONS

Intelligent Manager

The ideal solution for control and management of maximum 1,024 VRV® indoor units.

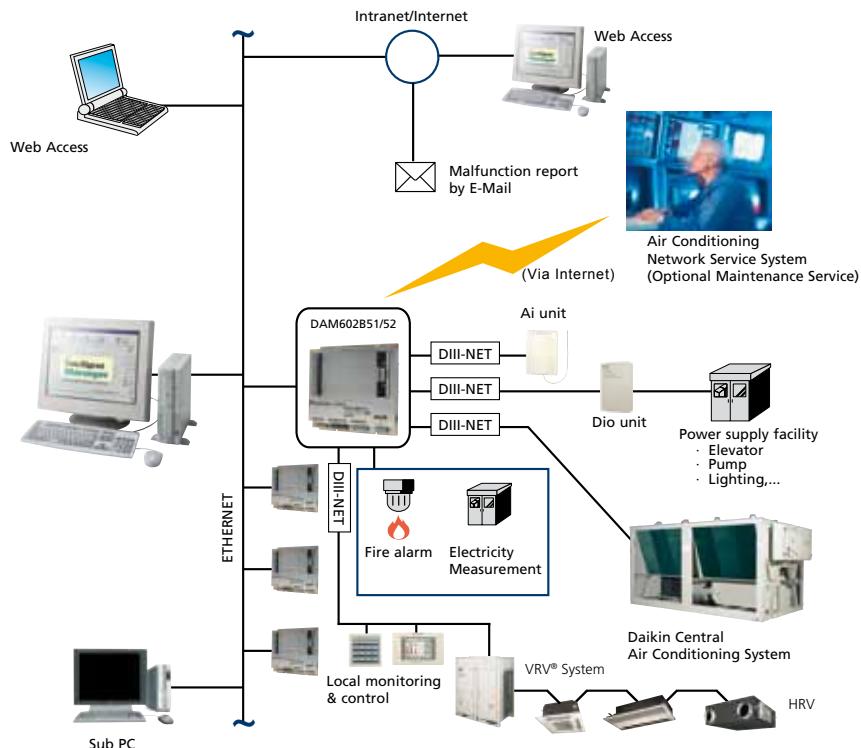

Languages

- English
- French
- German
- Italian
- Spanish
- Dutch
- Portuguese

System layout

- Up to 1,024 indoor units can be controlled (by 4 iPUs)
- Ethernet TCP/IP / 10 base / T communication
- Integrated digital contacts on the Intelligent Processing Unit (IPU)
 - 20 general input ports
 - 2 digital outputs
- Stand alone operation of the IPU for minimum 48 hours
- Compatible with UPS shutdown software

Management

- Web access (option)
- Power Proportional Distribution (option)
- Operational history management (start/stop, malfunction, operation hours)
- Generation of reports (graphics & tables) (daily, weekly, monthly)
- Peak load shedding
- Advanced tenant management
- Sliding temperature
- Eco mode (option)
- Pre cooling and heating function ↔ new

Control

- Individual control (setpoint, start/stop, fan speed) (max. 1,024 indoor units)
- Group control (100 groups)
- Schedule control (128 programs)
- Fire emergency stop control (32 programs)
- Interlocking control
- Setpoint limitation
- Automatic cooling/heating change-over
- Power failure/release control
- Temperature limit (automatic start)
- Timer extension

Monitoring

- Visualisation via a Graphical User Interface (GUI) featuring free layout
- Operation mode of indoor units
- Fault indication
- Indication filter replacement
- Setpoint indication
- Operation time monitoring
- Multi PC
- On-line help

Cost performance

- Labour saving
- Easy installation
- Compact design: limited installation space
- Overall energy saving

Connectable to:


- VRV®
- HRV
- Sky Air (via interface adapter)
- Split (via interface adapter)

NETWORK SOLUTIONS



LonWorks® Networks Compatible Gateway


- Interface for Lon connection to LonWorks® networks
- Communication via Lon® protocol (twisted pair wire)
- 64 units connectable per DMS-IF
- Unlimited sitesize
- Quick and easy installation

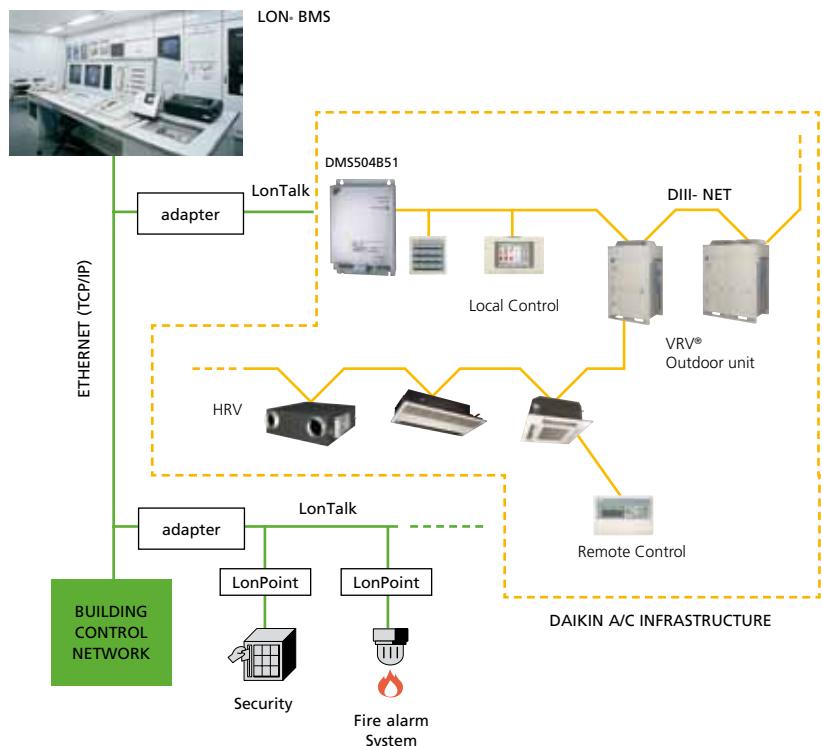

BACnet Gateway

Integrated control system connecting VRV® system with BMS system

- PPDdata is available on BMS system
- Interface for BMS system
- Communication via BACnet protocol (connection via Ethernet)
- 256 units connectable per BACnet gateway
- Unlimited sitesize
- Easy and fast installation

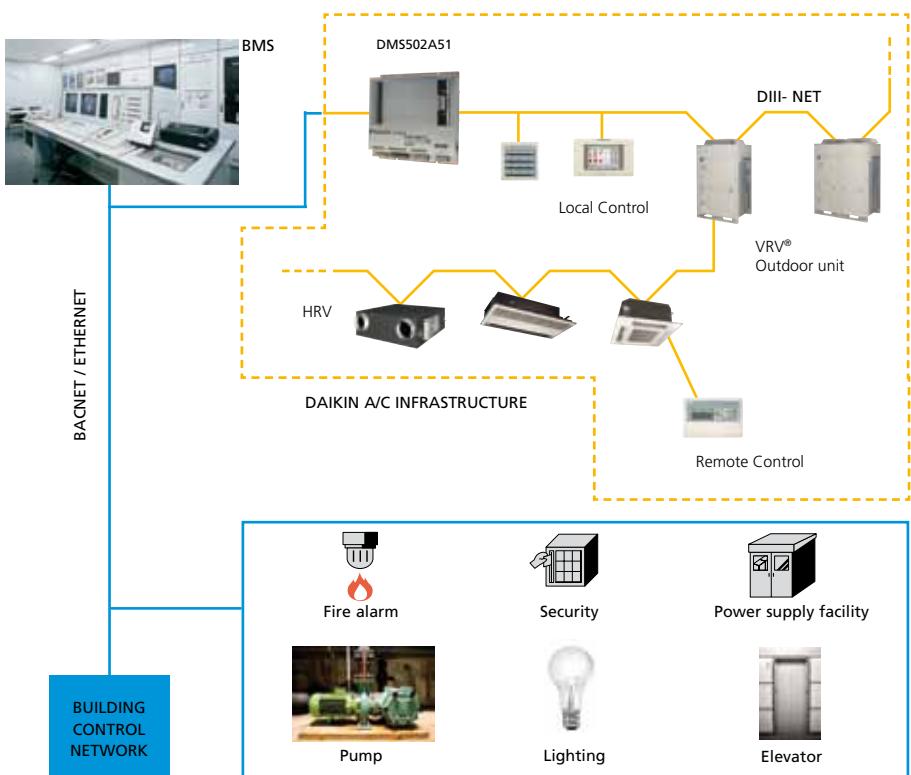



DAIKIN NETWORK SERVICE SYSTEM

Remote monitoring and diagnostics system for professionals

THE DAIKIN NETWORK SERVICE SYSTEM IS DESIGNED TO OPTIMISE THE RUNNING OF YOUR AIR CONDITIONING EQUIPMENT, INCREASING ITS OPERATIONAL EFFICIENCY, MINIMISING POSSIBLE DOWN TIME AND INCREASING CUSTOMER COMFORT LEVELS.

1



24/7/365 data monitoring

The local controller (I-Touch Controller, I-Manager or LC controller) collects operational data and monitors the equipment in 1 minute intervals throughout the day. This device is continually creating a report of operational data and transmits information regarding malfunctions and malfunction predictions at the time of occurrence.

monitoring

analysing

2



Continuous system analysis by Daikin UK and Daikin Japan

The Network Solution Centre based in Daikin Japan, receives the information sent from the controller. The link between Daikin Japan and UK, ensures continuous monitoring, 24/7/365. In the instant a failure occurs, a report with the last 30 minutes of operational data is sent. If a malfunction is predicted it will be transferred to a Daikin UK specialist engineer for analysis.



Repairing your equipment

Daikin UK will provide you with all the necessary information to fix your Daikin equipment as quickly and efficiently as possible.

If required, Daikin engineers will be available to provide technical support via our Technical Helpdesk.

4

repairing



Informing you about operational issues

The malfunction predictions will be prioritised into three categories, high, medium and low, to give you the opportunity to optimise the schedules of engineers.

After each operational issue has been rectified, Daikin UK will send you a report confirming that the system is once again working to its' full potential.

3

informing

UNIQUE INNOVATION BY DAIKIN

What is the Daikin Network Service System (DNSS)?

The DNSS is a remote monitoring system, which will allow you to continuously optimise the running of your Daikin equipment; control your energy consumption (so reduce your Carbon Footprint), extend the lifespan of your equipment and reduce operational costs.

Prevent product malfunctions

The DNSS will analyse the data from your equipment every minute of the day and will alert us before the equipment actually breaks down. In this way, failures can be prevented and possible down time reduced to an absolute minimum.

Remote diagnostics

The DNSS continuously checks the cleanliness of the system filters and heat exchanger. Furthermore, the DNSS manages a wide range of data (pressures, temperatures, running hours, etc.) in order to let your equipment run as efficiently and trouble free as possible. This will also prevent your equipment from using too much energy.

Extend product lifetime

The DNSS is designed to make sure that your equipment is maintained and running as efficiently as possible. This optimisation will extend the lifespan of your equipment.

Malfunction messages

In the unlikely event of a problem occurring, your regional Daikin office will contact you directly. Our engineers, who are dedicated to your installation, will inform you regarding the nature of the problem and will help you towards the next step of solving the problem.

YOUR INSTALLATION UNDER CONTINUOUS MONITORING

- 24/7/365 remote monitoring
- Predictive maintenance
- Improved reliability
- Improved comfort levels
- Helps increase efficiency
- Helps reduce maintenance costs
- Extends product lifetime

EXTRA VALUE AT LOW COST

- A strategy of preventing breakdowns and limiting unnecessary maintenance visits
- Efficiently organising site interventions by diagnosing the nature and the extent of the problem before going to site
- Innovative technology that helps to optimise your equipment's potential
- Ensures the most comfortable environment in your premises



Precise environmental control is vital in many industrial and commercial applications. Daikin offers an outstanding range of powerful air cooled, water cooled and condenserless chiller systems that will maintain ideal conditions in even the largest premises. Daikin water chillers are of advanced design, compact and easy to install and maintain.

They prove flexible and effective in multiple process cooling applications in for example, fish farms, wine cellars, maritime transport, agricultural, pharmaceutical or industrial processes. When combined with air handling units or Daikin fan coil units of course, they are ideal for air conditioning offices, hotels, restaurants and even domestic premises.

Matched and flexible equipment/refrigerant combinations enable Daikin to offer a complete range of chillers, genuinely optimised for use with R-134a, R-407C and R-410A. All chiller components -evaporator, condenser, dryer, oil etc - have been specially selected for use with either R-407C, R-410A or R-134a refrigerants. The end result is a range of hi tech, high performance units, indicated by published EUROVENT data to be among the most energy efficient of their type on the market.

Advanced technology allied unsurpassed product reliability and quality, make Daikin chillers the first choice for professionals.


Applied Systems

AIR-COOLED	193	WATER-COOLED	214
new⇒ EWAQ-ACV3	193	EWWP-KAW1N	214
new⇒ EWYQ-ACV3	194	EWWD-MBYN	216
new⇒ EWAQ-ACW1	195	EWWD-DJYNN	217
new⇒ EWYQ-ACW1	196	EWWD-DJYNN/A	218
EUWA-KAZW	197	new⇒ EWWD-EJYNN	219
EUWY-KAZW	198	new⇒ EWWD-EJYNN/A	220
EWAQ-DAYN	199	EWWD-BJYNN	221
EWYQ-DAYN	200	EWWQ-AJYNN	222
EUWAC-FZW	201	EWWQ-AJYNN/A	223
EWAD-AJYNN	202		
EWAD-AJYNN/A	203	CONDENSERLESS CHILLER	225
EWAD-AJYNN/Q	204	EWLP-KAW1N	225
EWAD-AJYNN/H	205	EWLD-MBYN	226
EWAD-AJYNN/S	206	EWLD-DJYNN	227
EWAD-AJYNN/X	207	new⇒ EWLD-EJYNN	228
EWYD-BZ	208		
EWYD-BZ	209	CHILLER	229
EWAD-C-S	210	DICN (Daikin Integrated Chiller Network)	229
EWAD-C-X	211	EHMC (Hydraulic Module)	230
EWAD-C-P	212		
ERAD-E	213		

Daikin chiller range

Daikin's 50 years of experience manufacturing chillers, has given us a comprehensive portfolio of cooling only, heat pumps and heat recovery models. The range includes 5 kW to 2,200 kW, utilising both scroll and screw compressors designed and manufactured by Daikin.

Now introducing a new range of inverter screw chillers with ESEERs over 5.

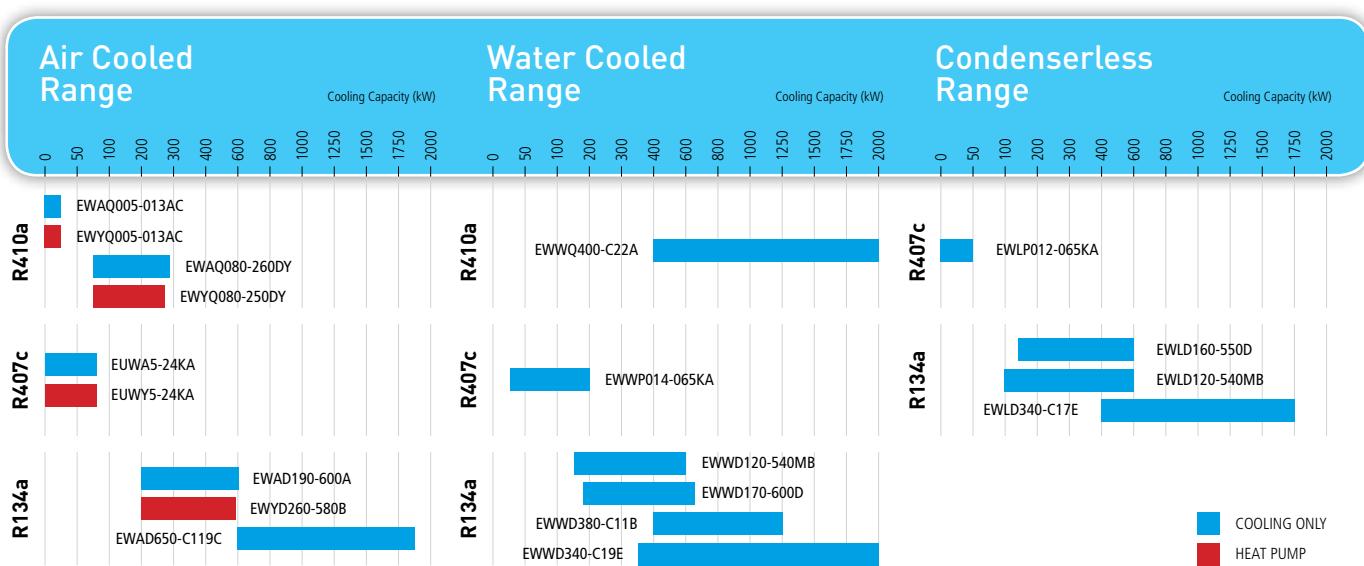

EWAQ-ACV3

Air Cooled – Mini-Chiller



EWAQ005AC



BRC1D52

STRENGTHS

- Optimised for use with R-410A
- Inverter controlled swing compressor
- Inverter controlled scroll compressor
- ESEER up to 4.57
- Sound operation down to 62dBA
- PE treated condenser coil
- Built-in hydraulic module
- Adaptive control possibility

COOLING ONLY			INVERTER					
			005	006	007	009	010	011
Capacity	Cooling	kW	5.2	6.0	7.1	8.5	9.5	11.0
Power input	Cooling	kW	1.89	2.35	2.95	2.74	3.19	3.82
EER			2.75	2.55	2.41	3.11	2.98	2.88
ESEER			3.75	3.83	3.87	4.57	4.52	4.46
Dimensions	(Height x Width x Depth)	mm	805 x 1190 x 360			1435 x 1418 x 382		
Weight	Machine weight	kg	100			180		
	Operating weight	kg	104			-		
Water Heat Exchanger	Type		Brazed plate					
	Water volume	l	-			1.01		
	Minimum water volume in the system	l	10			-		
	Water flow rate	Min l/min	12			16		
	Nominal water flow	Cooling l/min	14.9	17.2	20.4	24.4	27.2	31.5
Air heat exchanger	Type		Tube type			Hi-XSS		
External static pressure	Cooling	kPa	49.4	45.1	38.3	60.2	57.5	53.0
Expansion vessel	Volume	l	6			10		
Compressor	Type		Hermetically sealed swing compressor			Inverter hermetically sealed scroll compressor		
	Model	Quantity	1					
Sound power	Cooling	dBA	62			64		
Sound pressure	Cooling	Rated dBA	48			51		
		Night quiet dBA	-			45		
Operation range	Water side	Min~Max °CDB	5~20			5~22		
	Air side	Min~Max °CDB	10~43			10~46		
Refrigerant circuit	Refrigerant type		R-410A					
	Refrigerant charge	kg	1.7			2.95		
	No of circuits		1					
	Refrigerant control		Inverter			Electronic expansion valve		
Power Supply			1~/230V/50Hz					
Piping connections	Water heat exchanger inlet, outlet / drain		1" mbsp / hose nipple 1/2" fbsp			-		
	Piping / Diameter	Inch	-			3 /G5/ 4"		



EWYQ009AC

EWYQ-ACV3

Air Cooled – Mini-Chiller



BRC1D52

STRENGTHS

- Optimised for use with R-410A
- Inverter controlled swing compressor
- Inverter controlled scroll compressor
- ESEER up to 4.57
- Sound operation down to 62dBA
- PE treated condenser coil
- Built-in hydraulic module
- Adaptive control possibility

HEATING AND COOLING			INVERTER								
			005	006	007	009	010	011			
Capacity	Cooling	kW	5.2	6.0	7.1	8.5	9.5	11.0			
	Heating	kW	5.65	6.35	7.75	10.0	11.5	13.0			
Power input	Cooling	kW	1.89	2.35	2.95	2.74	3.19	3.82			
	Heating	kW	1.97	2.24	2.83	2.91	3.38	3.86			
EER			2.75	2.55	2.41	3.11	2.98	2.88			
ESEER				-		4.57	4.52	4.46			
COP			2.87	2.83	2.74	3.44	3.40	3.37			
Dimensions	(Height x Width x Depth)	mm	805 x 1190 x 360			1435 x 1418 x 382					
Weight	Machine weight	kg	100			180					
	Operating weight	kg	104			-					
Water Heat Exchanger	Type		Brazed plate								
	Water volume	l	-								
	Minimum water volume in the system	l	10								
	Water flow rate	l/min	12								
	Nominal water flow	Cooling l/min	14.9	17.2	20.4	24.4	27.2	31.5			
		Heating l/min	17.5	19.5	23.5	28.7	33.0	37.5			
Air heat exchanger	Type		Tube type								
External static pressure	Cooling	kPa	49.4	45.1	38.3	60.2	57.5	53.0			
	Heating	kPa	44.5	40.3	30.7	55.2	50.0	41.8			
Expansion vessel	Volume	l	6								
Compressor	Type		Hermetically sealed swing compressor								
	Model	Quantity	1								
Sound power	Cooling	dBA	62		63	64					
	Heating	dBA	-			64					
Sound pressure	Cooling	Rated dBA	48		50	51					
		Night quiet dBA	-			45					
	Heating	Rated dBA	48		49	51					
		Night quiet dBA	-			42					
Operation range	Water side	Cooling °CDB	5~20			5~22					
		Heating °CDB	25~50			25~50					
	Air side	Cooling °CDB	10~43			10~46					
		Heating °CDB	-15~25			-15~35					
Refrigerant circuit	Refrigerant type		R-410A								
	Refrigerant charge	kg	1.7			2.95					
	No of circuits		1								
	Refrigerant control		Inverter			Electronic expansion valve					
Power Supply			1~/230V/50Hz								
Piping connections	Water heat exchanger inlet, outlet / drain		1" mbsp / hose nipple 1/2" fbsp			-					
	Piping / Diameter	Inch	-			3 /G5/ 4"					

EWAQ-ACW1

Air Cooled – Mini-Chiller



EWAQ009AC



BRC1D52

STRENGTHS

- Optimised for use with R-410A
- Inverter controlled scroll compressor
- ESEER up to 4.68
- Built-in hydraulic module
 - No buffer tank required
 - Standard pump included
 - Option high pump

COOLING ONLY			009	011	013
Capacity	Cooling	kW	9.0	11.0	13.2
Power input	Cooling	kW	2.96	3.82	5.10
EER			3.04	2.88	2.59
ESEER			4.68	4.63	4.52
Dimensions	(Height x Width x Depth)	mm		1435 x 1418 x 382	
Weight	Machine weight	kg		180	
	Operating weight	kg		-	
Water Heat Exchanger	Type			Brazed plate	
	Water volume	l		1.01	
	Minimum water volume in the system	l		-	
	Water flow rate	Min l/min		16	
	Nominal water flow	Cooling l/min	25.8	31.5	37.8
Air heat exchanger	Type			Hi-XSS	
External static pressure	Cooling	kPa	58.9	53.0	45.7
Expansion vessel	Volume	l		10	
Compressor	Type			Inverter hermetically sealed scroll compressor	
	Model	Quantity		1	
Sound power	Cooling	dBA	64		66
Sound pressure	Cooling	Rated dBA	51		52
		Night quiet dBA		45	
Operation range	Water side	Min~Max °CDB		5~22	
	Air side	Min~Max °CDB		10~46	
Refrigerant circuit	Refrigerant type			R-410A	
	Refrigerant charge	kg		2.95	
	No of circuits			1	
	Refrigerant control			Electronic expansion valve	
Power Supply				3N~/400V/50Hz	
Piping connections	Water heat exchanger inlet, outlet / drain			-	
	Piping / Diameter	Inch		3 / G5 / 4"	

EWYQ-ACW1

Air Cooled – Mini-Chiller



EWYQ009AC



BRC1D52

STRENGTHS

- Optimised for use with R-410A
- Inverter controlled scroll compressor
- ESEER up to 4.68
- Built-in hydraulic module
 - No buffer tank required
 - Standard pump included
 - Option high pump

HEATING AND COOLING			009	010	011
Capacity	Cooling	kW	9.0	11.0	13.2
	Heating	kW	11.0	12.5	14.0
Power input	Cooling	kW	2.96	3.82	5.10
	Heating	kW	3.23	3.70	4.19
EER			3.04	2.88	2.59
ESEER			4.68	4.63	4.52
COP			3.41	3.38	3.34
Dimensions	(Height x Width x Depth)	mm	1435 x 1418 x 382		
Weight	Machine weight	kg	180		
	Operating weight	kg	-		
Water Heat Exchanger	Type		Brazed plate		
	Water volume	l	1.01		
	Minimum water volume in the system	l	-		
	Water flow rate	l/min	16		
	Nominal water flow	Cooling l/min	25.8	31.5	37.8
		Heating l/min	31.5	35.8	40.1
Air heat exchanger	Type		Hi-XSS		
External static pressure	Cooling	kPa	58.9	53.0	45.7
	Heating	kPa	51.9	44.2	36.7
Expansion vessel	Volume	l	10		
Compressor	Type		Inverter hermetically sealed scroll compressor		
	Model	Quantity	1		
Sound power	Cooling	dBA	64	66	
	Heating	dBA		64	
Sound pressure	Cooling	Rated dBA	51	52	
		Night quiet dBA		45	
	Heating	Rated dBA		51	
		Night quiet dBA	42	43	
Operation range	Water side	Cooling °CDB		5~22	
		Heating °CDB		25~50	
	Air side	Cooling °CDB		10~46	
		Heating °CDB		-15~35	
Refrigerant circuit	Refrigerant type		R-410A		
	Refrigerant charge	kg	2.95		
	No of circuits		1		
	Refrigerant control		Electronic expansion valve		
Power Supply			3N~/400V/50Hz		
Piping connections	Water heat exchanger inlet, outlet / drain		-		
	Piping / Diameter	Inch	3 / G5 / 4"		

EUWA-KAZW

Air Cooled



EUWAN16KAZW



MICRO CHILLER

STRENGTHS

- Integrated hydraulic module (models B and P).
- Built-in buffer tank (model B).
- Daikin scroll compressor.
- Standard main isolator switch.
- Standard water flow switch.
- Standard filter (delivered as a kit with the unit).
- Operation down to -15°C ambient temperature.
- Standard reverse phase protection.
- Standard condenser protection grille.
- Freeze-up protection and prevention.
- PE treated condenser coil.

OPTIONS (factory mounted)

- Chilled water temperature down to - 5°C (OPZH) or -10°C (OPZL).
- High ESP fans (50Pa) (OPHF).
- Pump size up (OPHP).

ACCESSORIES (kit)

- Refrigerant pressure gauges.
- BMS gateway (MODBUS/J-BUS/BACNET protocol).
- Remote user interface.
- 200l buffer tank.
- Soft starter (single circuit).

CONTROL

- Microprocessor control.
- Water inlet temperature control.

AVAILABLE INPUTS / OUTPUTS

Input

- Remote ON/OFF.
- Pump contact.

Output

- Compressor operation.
- Pump relay contact.
- Summary alarm.

COOLING ONLY

		N5	P5	B5	N8	P8	B8	N10	P10	B10	N12	P12	B12	N16	P16	B16	N20	P20	B20	N24	P24	B24				
Capacity	Cooling	kW																								
Nominal input	Cooling	kW	11.30		17.90			22.50			26.50			37.00			46.60			55.30						
EER			4.64	4.52	4.64	7.39	7.38	7.39	8.74	8.79	8.74	11.50	15.00	15.20	15.00	17.90	18.10	17.90	24.00							
Capacity Steps	%		2.44	2.5	2.44	2.42	2.43	2.42	2.57	2.56	2.57	2.3	2.47	2.43	2.47	2.6	2.57	2.6	2.3							
Dimensions	(Height x Width x Depth)	mm				0-100						0-100					0-50-100			0-50-100						
Unit		kg	150	168	180	215	229	241	245	259	271	248	262	274	430	448	446	490	508	520	496	514	526			
Operating Weight		kg	152	171	239	218	232	300	248	262	330	251	265	335	436	457	525	496	518	586	503	524	592			
Water Heat Exchanger	Type																Brased plate									
	Minimum water volume in the system	l																111			132					
	Water flow rate	Min	l/min															53			67					
		Nominal	l/min															106			134					
		Max	l/min															212			267					
Air heat exchanger	Type																Cross fin coil/Hi-X tubes and PE coated waffle louvre fins									
Buffer tank volume	Volume	l	-	55	-	55	-	55	-	55	-	55	-	55	-	55	-	55	-	55	-	55				
Sound Power	Cooling	dBA	67		76												79			81						
Compressor	Type																Hermetically sealed scroll compressor									
	Model	Quantity																1			2					
Refrigerant circuit	Refrigerant type																	R-407C								
	Refrigerant charge	kg	3.9		4.6													6.0			4.6		5.9	6.0		
	No of circuits																	1			2					
	Refrigerant control																	Thermostatic expansion valve								
Power Supply																		3N~/400V/50Hz								
Piping connections	Evaporator water inlet/outlet																	1-1/4"15 mm								
																			2"15 mm							

EUWY-KAZW

Air Cooled



EUWYN16KAZW



MICRO CHILLER

STRENGTHS

- Integrated hydraulic module (models B and P).
- Built-in buffer tank (model B).
- Daikin scroll compressor.
- Standard main isolator switch.
- Standard water flow switch.
- Standard filter (delivered as a kit with the unit).
- Operation down to -15°C ambient temperature.
- Standard reverse phase protection.
- Standard condenser protection grille.
- Freeze-up protection and prevention.
- PE treated condenser coil.

OPTIONS (factory mounted)

- Chilled water temperature down to - 5°C (OPZH) or -10°C (OPZL).
- High ESP fans (50Pa) (OPHF).
- Pump size up (OPHP).

ACCESSORIES (kit)

- Refrigerant pressure gauges.
- BMS gateway (MODBUS/J-BUS/BACNET protocol).
- Remote user interface.
- 200l buffer tank.
- Soft starter (single circuit).

CONTROL

- microprocessor control.
- Water inlet temperature control.

AVAILABLE INPUTS / OUTPUTS

Input

- Remote ON/OFF.
- Pump contact.
- Remote cool/heat selection.

Output

- Compressor operation.
- Summary alarm.
- Pump relay contact.

HEAT PUMP

	Heat Pump																						
	N5	P5	B5	N8	P8	B8	N10	P10	B10	N12	P12	B12	N16	P16	B16	N20	P20	B20	N24	P24	B24		
Capacity	Cooling	kW		9.10		17.10		21.00		25.00		34.20		40.00		50.00							
	Heating	kW		11.90		18.50		24.00		27.00		37.00		46.00		54.00							
Nominal input	Cooling	kW		3.78		7.45		7.46		8.57		11.40		14.90		16.30		22.80					
	Heating	kW		4.59		7.10		9.10		10.80		14.20		17.40		21.60							
EER				2.41		2.3		2.29		2.45		2.19		2.3		2.45		2.19					
COP				2.59		2.61		2.64		2.5		2.61		2.64		2.5							
Capacity Steps		%		0-100										0-50-100									
Dimensions	(Height x Width x Depth)	mm		1,230x1,290x734				1,450x1,290x734				1,321x2,580x734				1,541x2,580x734							
Unit		kg		163	181	193	227	241	253	258	272	284	258	272	284	455	473	485	516	534	546		
Operating Weight		kg		165	184	252	230	244	312	261	275	343	261	275	343	461	482	550	522	544	612		
Water Heat Exchanger	Type			Brased plate																			
	Minimum water volume in the system	l		43		82		100		119		82		96		119							
	Water flow rate	Min	l/min	21		31		38		45		61		72		89							
		Max	l/min	68		106		137		155		212		263		309							
	Nominal Water Flow	Cooling	kPa	10		25		24		33				12		19							
		Heating	kPa	17		29		31		38		14		16		22							
Air heat exchanger	Type			Cross fin coil/Hi-X tubes and PE coated waffle louvre fins																			
Buffer tank volume	Volume	l		-	55	-	55	-	55	-	55	-	55	-	55	-	55	-	55	-			
Sound Power	Cooling	dBA		67		76		78		79				81									
Compressor	Type			Hermetically sealed scroll compressor																			
	Model	Quantity		1																			
Refrigerant circuit	Refrigerant type			R-407C																			
	Refrigerant charge	kg		4.6		4.7		5.4		10.2		10.8		11.2									
	No of circuits			1																			
	Refrigerant control			Thermostatic expansion valve																			
Power Supply				3N~/400V/50Hz																			
Piping connections	Evaporator water inlet/outlet			1-1/4"15mm																2"15mm			

EWAQ-DAYN

Air Cooled



EWAQ130-150DAYN



PCASO

STRENGTHS

- Integrated hydraulic module
- Standard main isolator switch
- Standard water flow switch
- Filter
- Operation down to 0°C ambient temperature (-15°C with option inverter fans (OPIF))
- Standard reverse phase protection
- Freeze-up protection and prevention
- PE treated condenser coil
- R-410A refrigerant
- Multiple refrigerant circuits and multiple compressors per circuit
- Reliable and efficient scroll with high EER values
- Good part load efficiency (seasonal EER)
- Anti-corrosion treated aluminium coils
- Low operating noise levels
- Safety valves in each circuit
- Electronic circuit breakers
- Electronic expansion valve

- True dual plate brazed plate heat exchanger
- Sight glass
- All hydraulics can be accessed easily from 3 sides (no surrounding cabinet)
- Separate switchbox for easy access
- Increased reliability via 2 independent refrigerant circuits
- Non hermetic filter/dryer
- New Daikin controller (Pcaso) with user friendly and powerful LCD interface

OPTIONS (factory mounted)

- Hydraulic module with single pump
- Hydraulic module with double pump
- Low noise
- Double pump
- Single / Double pump contactors
- Inverter fans
- Evaporator heater tape
- AV meter
- Service values
- Pressure relief valve

- Ultra-low operation outdoor temperature (-18°C)
- Condenser protection grilles
- Chilled water temperature down to -10°C (OPZL)

CONTROL

- Microprocessor control
- New Daikin controller (Pcaso) with user friendly and powerful LCD interface
- Water outlet temperature control
- Water inlet temperature control

AVAILABLE INPUTS / OUTPUTS

Input

- ON / OFF (per circuit)
- Dual setpoint
- Floating setpoint

Output

- Compressor operation
- Summary alarm (per circuit)
- Pump relay contact
- General operation

COOLING ONLY										
			080	100	130	150	180	210	240	260
Capacity	Cooling	kW	80	105	131	152	182	209	236	254
Nominal input	Cooling	kW	26.4	36.2	46.6	56.3	64.5	74.6	82.8	94.0
EER			3.03	2.90	2.81	2.70	2.82	2.80	2.85	2.70
Capacity Steps	%		0-50-100		0-25-50-75-100		21/29-43/50-57-71/79-100	0-25-50-75-100	22/28-40/50-56-72/78-100	0-25-50-75-100
Dimensions	(Height x Width x Depth)	mm	2,311x2,000x2,566		2,311x2,000x2,631		2,311x2,000x3,081		2,311x2,000x4,850	
Unit		kg	1,350	1,400	1,500	1,550	1,800	1,850	3,150	3,250
Operating Weight		kg	1,315	1,415	1,517	1,569	1,825	1,877	3,189	3,292
Water Heat Exchanger	Type		Brased plate							
	Minimum water volume in the system	l	358	470	295	341	408	468	529	569
	Water flow rate	Min l/min	115	151	188	218	261	300	339	364
		Max l/min	459	602	754	871	1,043	1,198	1,355	1,456
	Nominal Water Flow	Cooling kPa	59	58	52	49	52	53	51	47
Air heat exchanger	Type		Cross fin coil / Hi-Xss tubes and PE coated							
Sound Power	Cooling	dBA	86	88	89	90			91	
Compressor	Type		Scroll compressor							
	Model	Quantity	2		4		2	4	2	4
Refrigerant circuit	Refrigerant type		R-410A							
	Refrigerant charge	kg	33	19	25	29	28		39	
	No of circuits		1				2			
	Refrigerant control		Electronic expansion valve							
Power Supply			3~/400V/50Hz							
Piping connections	Water heat exchanger inlet / outlet		3" od							
	Water heat exchanger drain		1/2" g							

EWYQ-DAYN

Air Cooled



EWYQ130-150DAYN



PCASO

STRENGTHS

- Integrated hydraulic module
- Standard main isolator switch
- Standard water flow switch
- Filter
- Operation down to 0°C ambient temperature (-15°C with option inverter fans (OPIF))
- Standard reverse phase protection
- Freeze-up protection and prevention
- PE treated condenser coil
- R-410A refrigerant
- Multiple refrigerant circuits and multiple compressors per circuit
- Reliable and efficient scroll with high EER values
- Good part load efficiency (seasonal EER)
- Anti-corrosion treated aluminium coils
- Low operating noise levels
- Safety valves in each circuit
- Electronic circuit breakers
- Electronic expansion valve
- True dual plate brazed plate heat exchanger

- Sight glass
- All hydraulics can be accessed easily from 3 sides (no surrounding cabinet)
- Separate switchbox for easy access
- Increased reliability via 2 independent refrigerant circuits
- Non hermetic filter/dryer

OPTIONS (factory mounted)

- Hydraulic module with single pump
- Hydraulic module with double pump
- Low noise
- Double pump
- Single / Double pump contactors
- Inverter fans
- Evaporator heater tape
- AV meter
- Service values
- Pressure relief valve
- Ultra-low operation outdoor temperature (-18°C)
- Condenser protection grilles
- Chilled water temperature down to -10°C (OPZL)

CONTROL

- Microprocessor control
- New Daikin controller (PCASO) with user friendly and powerful LCD interface
- Water outlet temperature control
- Water inlet temperature control

AVAILABLE INPUTS / OUTPUTS

Input

- ON / OFF (per circuit)
- Dual setpoint
- Floating setpoint

Output

- Compressor operation
- Summary alarm (per circuit)
- Pump relay contact
- General operation

HEAT PUMP

		080	100	130	150	180	210	230	250	
Capacity	Cooling	kW	77	100	136	145	183	211	231	252
	Heating	kW	87.7	114	149	165	199	225	258	281
Nominal input	Cooling	kW	26.5	36.2	47.6	55.7	63.8	75.3	82.2	93.5
	Heating	kW	30.0	38.1	49.6	58.8	68.0	77.0	84.2	96.6
EER			2.91	2.76	2.86	2.6	2.87	2.8	2.81	2.70
COP			2.92	2.99	3	2.81	2.93	2.92	3.06	2.91
Capacity Steps	%		0-50-100		0-25-50-75-100		21/29-43/50/57-71/79-100	0-25-50-75-100	22/28-44/50/56-72/78-100	0-25-50-75-100
Dimensions	(Height x Width x Depth)	mm								
			2,311x2,000x2,566		2,311x2,000x2,631		2,311x2,000x3,081		2,311x2,000x4,850	
Unit		kg	1,400	1,450	1,550	1,600	1,850	1,900	3,200	3,300
Operating Weight		kg	1,415	1,465	1,567	1,619	1,875	1,927	3,239	3,342
Water Heat Exchanger	Type					Braised plate				
	Minimum water volume in the system	l	393	511	334	370	446	504	578	629
	Water flow rate	Min l/min	110	143	195	208	262	302	331	361
		Max l/min	503	654	854	946	1,141	1,290	1,479	1,611
	Nominal Water Flow	Cooling kPa		36	43	38	41	44	39	38
Air heat exchanger	Type					Cross fin coil / Hi-Xss tubes and PE coated				
Sound Power	Cooling	dBA	86	88	89	90			91	
Compressor	Type					Scroll compressor				
	Model	Quantity	2	4	2	4	2	4		
Refrigerant circuit	Refrigerant type					R-410A				
	Refrigerant charge	kg	33	37	22	32			39	
	No of circuits		1			2				
	Refrigerant control					Electronic expansion valve				
Power Supply						3~/400V/50Hz				
Piping connections	Water heat exchanger inlet / outlet				3"od				3"	
	Water heat exchanger drain					1/2" g				

EUWAC-FZW

Air Cooled



EUWAC8FZW1



MICRO CHILLER

STRENGTHS

- Daikin scroll compressor.
- Standard reverse phase protection.
- High static pressure (up to 150Pa).
- Operation down to -10°C ambient temperature.
- Pressure gauges.

OPTIONS (factory mounted)

- Chilled water temperature down to - 5°C (ZH) or -10°C (ZL).

ACCESSORIES (kit)

- Filter
- BMS gateway
(MODBUS / J-BUS / BACNET protocol).
- Remote user interface.
- Hydraulic module.

CONTROL

- Microprocessor control.
- Water inlet temperature control.

AVAILABLE INPUTS / OUTPUTS

Input

- ON / OFF (per circuit).
- Pump / flow switch.

Output

- Compressor operation.
- Summary alarm.
- Pump relay contact.

COOLING ONLY

		5	8	10
Capacity	Cooling	kW	11.60	18.40
Nominal input	Cooling	kW	5.25	7.78
EER			2.21	2.37
Capacity Steps	%		100-0	
Dimensions	(Height x Width x Depth)	mm	1,345x856x630	1,290x1,180x630
Unit		kg	164	224
Operating Weight		kg	166	228
Water Heat Exchanger	Type		Brased plate, one per circuit	
	Minimum water volume in the system	l	101	153
	Water flow rate	l/min	16	23
	Min	l/min	33	53
	Max	l/min	64	92
Air heat exchanger	Type		Cross fin coil/Hi-X tubes and PE coated waffle louvre fins	
Sound Power	Cooling	dBA	63	66
Compressor	Type		Hermetically sealed scroll compressor	
	Model		1	
Refrigerant circuit	Refrigerant type		R-407C	
	Refrigerant charge	kg	2.1	3.9
	No of circuits		1	
	Refrigerant control		Thermostatic expansion valve	
Power Supply			3N~/400V/50Hz	
Piping connections	Evaporator water inlet/outlet		fbsp 1"field installation	

EWAD-AJYNN

Air Cooled



EWAD-AJYNN



pCO²

STRENGTHS

- All models are PED pressure vessel approved
- Stepless single-screw compressor
- Optimised for use with R-134a
- Cooling range: 184–600kW
- Eurovent class A: EER up to 2,84
- 2 truly independent refrigerant circuits
- DX shell and tube evaporator – one pass
- Refrigerant side to minimize pressure drops
- Several operating sound levels down to 93dB

STANDARD AVAILABLE

- Glycol application
- Evaporator heater
- Suction stop valve
- Main switch

OPTIONS (factory mounted)

- Single pump
- Twin pump
- High ESP pump
- High ESP twin pump
- Total heat recovery
- Partial heat recovery
- Reduced noise (440-480-500-550-600) / Low noise
- Fan silent
- Low ambient
- Power factor 0.9
- Gauges
- Coil guards
- Soft starter (400-440-480-500-550-600)
- Blank CU/al coils
- Electronic expansion valve

ACCESSORIES

- Communication cards (EKAC200J – EKACBAC - EKACLON)
- Remote user interface (EKRUPCJ)
- Buffer tanks (EKBT500N - EKBTC10N - EKBT500C - EKBTC500C)
- Sequencing panel (EKCSII)
- Plant visor (EKPV2J)
- Modem (EKMODEM – EKGSMOD)
- Converter RS485 to RS 232 (EKCON)

COOLING ONLY																	
Capacity	Cooling	kW	190	200	230	260	280	300	320	340	360	400	440	480	500	550	600
Nominal input	Cooling	kW	184.0	197.8	225.0	245.0	261.0	275.0	298.4	321.0	370.0	401.3	451.0	478.7	510.1	551.0	588.0
EER			81.3	79.6	84.6	93.5	101.3	108.3	119.4	123.4	133.4	155.7	167.0	177.6	186.9	195.6	202.9
Capacity Steps		%	2.26	2.48	2.66	2.62	2.58	2.54	2.50	2.60	2.77	2.58	2.70	2.69	2.73	2.82	2.90
Dimensions	(Height x Width x Depth)		mm			2,340x2,235x2,240			2,340x2,235x3,140			2,340x2,235x4,040			2,340x2,235x4,040		
Unit		kg	2,380	2,466	2,766	2,806	2,846	3,166	3,186	3,552	3,932	3,997	4,052	4,092	4,122		
Operating Weight		kg	2,405	2,497	2,859	2,896	2,936	3,279	3,299	3,680	4,102	4,161	4,216	4,252	4,282		
Water Heat Exchanger	Type		Plate to plate heat exchanger			Shell and tube											
	Minimum water volume in the system	l	25	31	93		90		113	128	170	164	160				
	Water flow rate	Min l/min	311	374	327	333	361	368	503	512	920.32	1,240.87	1,317.08	1,403.20	1,516.00	1,617.81	
		Nominal l/min	527	567	645	702	748	788	855	920	1,061	1,150.41	1,292.57	1,371.96	1,461.67	1,579.17	1,685.22
		Max l/min	985	1,182	1,033	1,053	1,141	1,162	1,164	1,590	1,618	1,380.49	1,551.09	1,646.35	1,754.00	1,895.01	2,022.26
Air heat exchanger	Type		Grooved tubes and ALU coated louvred fins														
Sound Power	Cooling	dBA				75			77.5		76.5		77.0		78.5		79.0
Compressor	Type		Semi-hermetic single screw compressor														
Refrigerant circuit	Model	Quantity	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
	Refrigerant type		R-134a														
	Refrigerant charge	kg	44	60	70		80		70	80	78		76				
	No of circuits		2														
Power Supply			3~/400V/50Hz														
Piping connections	Evaporator water inlet/outlet		3"1/2" gas			4"1/2" gas										1/2" gas	

EWAD-AJYNN/A

Air Cooled



EWAD-AJYNN/A



pCO₂

STRENGTHS

- High Efficiency**
- Eurovent class A: EER up to 3,21
- All models are PED pressure vessel approved
- Stepless single-screw compressor
- Optimised for use with R-134a
- Cooling range: 247-626,6kW
- 2 truly independent refrigerant circuits
- DX shell and tube evaporator – one pass
- Refrigerant side to minimize pressure drops
- Several operating sound levels down to 96dB

STANDARD AVAILABLE

- Glycol application
- Evaporator heater
- Suction stop valve
- Main switch

OPTIONS (factory mounted)

- Single pump
- Twin pump
- High ESP pump
- High ESP twin pump
- Total heat recovery
- Partial heat recovery
- Fan silent
- Low ambient
- Power factor 0.9
- Low noise
- Gauges
- Coil guards
- Soft starter (500-550-600-650)
- Blank cu/al coils
- Electronic expansion valve

ACCESSORIES

- Communication cards (EKAC200J – EKACBAC - EKACLON)
- Remote user interface (EKRUPCJ)
- Buffer tanks (EKBT500N - EKBTC10N - EKBT500C - EKBTC500C)
- Sequencing panel (EKCSII)
- Plant visor (EKPV2J)
- Modem (EKMODEM – EKGSMOD)
- Converter RS485 to RS 232 (EKCON)

COOLING ONLY

		260	280	320	340	360	380	420	500	550	600	650	
Capacity	Cooling	kW	247.0	275.0	301.5	327.0	351.0	376.0	401.0	501.4	531.5	582.2	626.6
Nominal input	Cooling	kW	79.2	87.3	94.2	103.8	112.8	120.2	127.5	160.6	170.9	183.5	195.4
EER			3.12	3.15	3.20	3.15	3.11	3.13	3.15	3.12	3.11	3.17	3.21
Capacity Steps		%	12.5 - 100										
Dimensions	(Height x Width x Depth)		2,340x2,235x3,140	2,340x2,235x4,040						2,340x2,235x4,940			
Unit		kg	2,866	3,186	3,286	3,366	3,376	3,321	3,386	4,252	4,642	4,652	
Operating Weight		kg	2,959	3,299	3,399	3,530	3,535	3,480	3,545	4,515	4,905	4,908	
Water Heat Exchanger	Type		Shell and tube										
	Minimum water volume in the system	l	93	113	164	159		263		256			
	Water flow rate	l/min	373	489	495	537	586	593	598	1,152.09	1,221.25	1,337.75	1,439.77
	Min	l/min	708	788	864	937	1,006	1,078	1,150	1,440.11	1,526.57	1,672.19	1,799.71
	Nominal	l/min											
	Max	l/min	1,180	1,546	1,565	1,697	1,853	1,876	1,890	1,728.14	1,831.88	2,006.63	2,159.66
Air heat exchanger	Type		Grooved tubes and ALU coated louvred fins										
Sound Power	Cooling	dBA	77.5				80				79.0		
Compressor	Type		Semi-hermetic single screw compressor										
	Model	Quantity	2	1	2	1	2	1	2	1	2	1	2
Refrigerant circuit	Refrigerant type		R-134a										
	Refrigerant charge	kg	80	100	110	95	110	80			104		
	No of circuits		2										
Power Supply			3~/400V/50Hz										
Piping connections	Evaporator water inlet/outlet		4"1/2" gas										
			1/2" gas										

EWAD-AJYNN/Q

Air Cooled



EWAD-AJYNN/Q



pCO²

STRENGTHS

- Standard efficiency extra low noise**
- Several operating sound levels down to 84dB
- All models are PED pressure vessel approved
- Stepless single-screw compressor
- Optimised for use with R-134a
- Cooling range: 203–500,8kW
- Eurovent class A: EER up to 2,7
- 2 truly independent refrigerant circuits
- DX shell and tube evaporator – one pass
- Refrigerant side to minimize pressure drops

STANDARD AVAILABLE

- Glycol application
- Evaporator heater
- Suction stop valve
- Main switch

OPTIONS (factory mounted)

- Total heat recovery
- Partial heat recovery
- Fan silent
- Power factor 0.9
- Gauges
- Coil guards
- Soft starter (400-440-460-500)
- Blank cu/al coils
- Electronic expansion valve

ACCESSORIES

- Communication cards (EKAC200J – EKACBAC - EKACLON)
- Remote user interface (EKRUPCJ)
- Buffer tanks (EKBT500N - EKBTC10N - EKBT500C - EKBTC500C)
- Sequencing panel (EKCSII)
- Plant visor (EKPV2J)
- Modem (EKMODEM – EKGSMOD)
- Converter RS485 to RS 232 (EKCON)

COOLING ONLY			210	240	260	280	300	320	340	400	440	460	500	
Capacity	Cooling	kW	203.0	231.1	252.7	270.8	286.1	299.4	308.8	400.5	428.5	458.4	500.8	
Nominal input	Cooling	kW	79.8	85.2	93.7	104.5	114.5	126.1	136.3	156.0	173.8	182.4	189.9	
EER			2.54	2.71	2.70	2.59	2.50	2.37	2.27	2.57	2.47	2.51	2.64	
Capacity Steps		%								12.5 - 100				
Dimensions	(Height x Width x Depth)		2,340x2,235x3,140							2,340x2,235x4,040			2,340x2,235x4,940	
Unit		kg	3,046	3,366	3,466	3,546				3,556	3,567	3,722	3,912	3,972
Operating Weight		kg	3,136	3,479	3,579	3,710				3,715	3,737	3,892	4,076	4,136
Water Heat Exchanger	Type									Shell and tube				
	Minimum water volume in the system	l	90	113	164		159			170		164		
	Water flow rate	Min l/min	364	474	483	518	566	572	571	918.27	982.47	1,051.02	1,148.24	
		Nominal l/min	582	662	724	776	820	858	885	1,147.84	1,228.09	1,313.78	1,435.30	
		Max l/min	1,152	1,500	1,527	1,637	1,790	1,809	1,807	1,377.41	1,473.70	1,576.54	1,722.36	
Air heat exchanger	Type						Grooved tubes and ALU coated louvred fins							
Sound Power	Cooling	dBA					65				65.5		66.0	
Compressor	Type						Semi-hermetic single screw compressor							
	Model	Quantity	2	1	2	1	2	1	2	1	2	1	2	
Refrigerant circuit	Refrigerant type						R-134a							
	Refrigerant charge	kg	80	100			110			72	80	83	86	
	No of circuits						2							
Power Supply							3~/400V/50Hz							
Piping connections	Evaporator water inlet/outlet						1/2" gas							

EWAD-AJYNN/H

Air Cooled – High Ambient



EWAD400AJYNN/H



pCO²

STRENGTHS

- High ambient
- Stepless single-screw compressor
- Optimised for use with R-134a
- 2 truly independent refrigerant circuits
- Standard anti-corrosion treated
- DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- Fitted standard with evaporator heater tape
- Condenser protection grilles are available throughout the whole range
- All models are PED pressure vessel approved
- Partial and total heat recovery option available

COOLING ONLY			200	210	240	260	280	300	320	340	400	420	460	480	500	550	600
Capacity	Cooling	kW	194.6	208.3	233.5	256.1	273.7	289.3	306.4	335.6	381.2	426.0	468.1	502.1	529.5	561.0	600.4
Power input	Cooling	kW	77.2	75.6	83.0	91.0	97.8	103.9	112.1	120.3	127.4	146.5	160.3	170.8	180.1	192.2	198.4
Capacity steps	%		12.5 - 100 (stepless)														
EER			2.52	2.76	2.81		2.8	2.78	2.73	2.79	2.99	2.91	2.92	2.94		2.92	3.03
ESEER			3.23	3.49	3.40	3.44	3.49		3.52	3.41	3.67	3.39	3.30	3.29	3.15	3.17	3.23
Dimensions	(Height x Width x Depth)	mm	2,340x2,235x2,240			2,340 x 2,235 x 3,140			2,340 x 2,235 x 4,040			2,340 x 2,235 x 4,940					
Weight	Machine weight	kg	2,380	2,466	2,766	2,806	2,846	3,166	3,186	3,942	4,202	4,277	4,332	4,392	4,402		
	Operating weight	kg	2,405	2,497	2,859	2,896	2,936	3,279	3,299	4,112	4,372	4,441	4,496	4,552	4,562		
Water Heat Exchanger Evaporator	Type		Plate to plate heat exchanger														
	Water volume	l	25	31	93		90		113	170		164	160				
	Water flow rate	l/min	314	378	331	337	366	369	373	507	518	976.74	1,073.26	1,151.22	1,214.04	1,286.27	1,376.60
		Nominal	558	597	669	734	785	829	878	962	1,093	1,220.92	1,341.58	1,439.03	1,517.55	1,607.83	1,720.75
		Max	994	1,194	1,045	1,065	1,157	1,167	1,179	1,603	1,638	1,465.11	1,609.90	1,726.83	1,821.07	1,929.40	2,064.90
	Nominal water pressure drop Cooling	kPa	31.5	25.0	41.0	47.5	46.0	50.5	55.5	36.0	44.5	53.1	63.1	55.9	61.4	55.9	61.6
Air heat exchanger	Type		Grooved tubes and ALU coated louvred fins														
	Nominal air flow	m ³ /min	1,434	1,368	2,154	2,100	2,046	2,874		2,580	3,372	3,300	3,228				
	Speed	rpm					900						890				
Compressor	Type		Semi-hermetic single screw compressor														
	Model	Quantity											2				
Sound power	Cooling	dBA	98.2		98.8		99.2	101	96.7	97.7		99.2	99.7				
Operation range	Water side	Min~Max °CDB											-8~15				
	Air side	Min~Max °CDB											-18 (OPLA)~48				
Refrigerant circuit	Refrigerant type		R-134a														
	Refrigerant charge	kg	36	42	44	55	56	58	66	70	90	95	100				
	No of circuits												2				
Power Supply			3~/400V/50Hz														
Piping connections	Evaporator water inlet / outlet		3"		4"								5.5"				
	Evaporator water drain												1/2" gas				

EWAD-AJYNN/S

Air Cooled – Standard Seasonal Inverter



EWAD-AJYNN/S



pCO²

STRENGTHS

- All models are PED pressure vessel approved
- Inverter stepless single-screw compressor
- Optimised for use with R-134a
- 2 truly independent refrigerant circuits
- DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- Quick start-up
- Standard electronic expansion valve
- ESEER up to 4.70
- Good part load efficiency
- Power factor >0.95

COOLING ONLY														
			330	360	400	420	460	490	520					
Capacity	Cooling	kW	329	358	395	423	459	488	515					
Power input	Cooling	kW	120	136	147	159	168	181	193					
Capacity steps			13.5-100 (stepless)											
EER			2.74	2.63	2.68	2.66	2.74	2.71	2.67					
ESEER			4.59	4.60	4.55	4.59	4.57	4.70	4.60					
Dimensions	(Height x Width x Depth)	mm	2,355 x 2,234 x 4,381		2,355 x 2,234 x 5,281		2,355 x 2,234 x 6,181							
Weight	Machine weight	kg	4,190		4,590		4,990							
	Operating weight	kg	4,440		4,840		5,240							
Water Heat Exchanger	Type		Shell and tube											
Evaporator	Minimum water volume in the system	l	1,277	1,389	1,533	1,641	1,781	1,893	1,998					
	Water volume	l	271	264		256		248						
	Water flow rate	Min l/min	515	565	622	673	727	768	814					
		Nominal l/min	943	1,026	1,132	1,213	1,316	1,399	1,476					
		Max l/min	1,360	1,491	1,637	1,759	1,935	2,025	2,139					
Nominal water pressure drop	Cooling	kPa	60	61	72	67	78	69	76					
Air heat exchanger	Type		Louvre fins											
Fan	Nominal air flow	m ³ /min	1,960		2,450		2,940							
	Speed	rpm			700									
Compressor	Type		Single screw compressor											
	Model	Quantity	2											
Sound power	Cooling	dBA	102.8		103.2		103.6							
Operation range	Water side	Min~Max °CDB	-9.5 (OPZL)~15											
	Air side	Min~Max °CDB	-10~45											
Refrigerant circuit	Refrigerant type		R-134a											
	Refrigerant charge	kg	73	99	105	114	118	121						
	No of circuits		2											
	Refrigerant control		Electronic expansion valve											
Power Supply			3~/400V/50Hz											
Piping connections	Evaporator water inlet / outlet	mm	168.3											

EWAD-AJYNN/X

Air Cooled – High Seasonal Efficiency Inverter



EWAD-AJYNN/X



pCO²

STRENGTHS

- High seasonal efficiency inverter
- ESEER up to 5.01
- All models are PED pressure vessel approved
- Inverter stepless single-screw compressor
- Optimised for use with R-134a
- EER up to 2.79
- 2 truly independent refrigerant circuits
- DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- Good part load efficiency
- Power factor >0.95
- Quick start-up
- Standard electronic expansion valve

COOLING ONLY			330	360	400	420	460	490	520					
Capacity	Cooling	kW	329	358	395	423	459	488	515					
Power input	Cooling	kW	118	135	145	157	165	178	190					
Capacity steps	% 13.5-100 (stepless)													
EER			2.78	2.66	2.73	2.70	2.79	2.75	2.71					
ESEER			4.79	4.82	4.78	4.84	4.81	5.01	4.84					
Dimensions	(Height x Width x Depth)	mm	2,355 x 2,234 x 4,381		2,355 x 2,234 x 5,281		2,355 x 2,234 x 6,181							
Weight	Machine weight	kg	4,190		4,590		4,990							
	Operating weight	kg	4,440		4,840		5,240							
Water Heat Exchanger Evaporator	Type		Shell and tube											
	Minimum water volume in the system	l	1,277	1,389	1,533	1,641	1,781	1,893	1,998					
	Water volume	l	271	264		256		248						
	Water flow rate	Min l/min	515	565	622	673	727	768	814					
		Nominal l/min	943	1,026	1,132	1,213	1,316	1,399	1,476					
		Max l/min	1,360	1,491	1,637	1,759	1,935	2,025	2,139					
	Nominal water pressure drop Cooling	kPa	60	61	72	67	78	69	76					
Air heat exchanger	Type		Louvre fins											
	Nominal air flow	m ³ /min	1,960		2,450		2,940							
	Speed	rpm	700											
Compressor	Type		Single screw compressor											
	Model	Quantity	2											
Sound power	Cooling	dBA	102.8		103.2		103.6							
Operation range	Water side	Min~Max °CDB	-9.5 (OPZL)~15											
	Air side	Min~Max °CDB	-10~45											
Refrigerant circuit	Refrigerant type		R-134a											
	Refrigerant charge	kg	73	99	105	114	118	121						
	No of circuits		2											
	Refrigerant control		Electronic expansion valve											
Power Supply			3~/400V/50Hz											
Piping connections	Evaporator water inlet / outlet	mm	168.3											

EWYD-BZ

Air Cooled – Heat Pump Inverter

STRENGTHS

- Optimised for use with R-134a
- Cooling range: 254 - 583 kW
- Heating range: 270 - 615 kW
- EER range up to 2.87
- Standard electronic expansion valve
- DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- Seasonal quietness
- Low starting current
- No gas boiler required
- Optimised defrost cycles
- Optimum ESEER values
- Partial and heat recovery option available
- PID microprocessor control
- Power factor up to 0.95
- 2-3 truly independent refrigerant circuits
- Standard operation range down to -12°C
- Available in two sound level configurations



EWYD250BZSS

HEATING AND COOLING																								
EWYD-BZSS (Standard efficiency - Standard noise)			250	270	290	320	340	370	380	410	440	460	510	520	580									
Capacity	Cooling	kW	254	273	292	324	339	365	382	413	436	457	505	522	583									
	Heating	kW	270	297	324	333	349	379	410	443	463	475	530	558	615									
Power input	Cooling	kW	90.3	100	109	116	124	134	142	152	163	161	178	186	215									
	Heating	kW	90.4	99	107	117	124	132	141	155	165	164	176	184	205									
Capacity steps	% /		13 - 100 (stepless)						9 - 100 (stepless)															
EER			2.81	2.74	2.69	2.79	2.74	2.73	2.68	2.72	2.68	2.83	2.83	2.81	2.71									
COP			2.98	2.99	3.03	2.84	2.80	2.87	2.90	2.85	2.81	2.90	3.02	3.04	3.00									
ESEER			4.05	4.04	4.01	4.07	4.01	4.02	3.94	4.03	4.01	4.31	4.13	4.13	4.05									
Dimensions	(Height x Width x Depth)		mm			2,335 x 2,254 x 3,547			2,335 x 2,254 x 4,381			2,335 x 2,254 x 5,281			2,335 x 2,254 x 6,583									
Weight	Machine weight		kg	3,410	3,455	3,500	3,870	3,940	4,010	4,390	5,015	5,495	5,735	5,735										
	Operating weight		kg	3,550	3,595	3,640	4,010	4,068	4,138	4,518	5,255	5,724	5,964	5,953										
Water Heat Exchanger	Type		Single pass shell and tube																					
	Water volume		l	138			133			128			240		229	218								
	Nominal water flow rate	Cooling	l/s	12.12	13.03	13.94	15.46	16.21	17.42	18.25	19.72	20.81	21.83	24.11	24.92	27.87								
		Heating	l/s	12.89	14.18	15.49	15.89	16.66	18.11	19.57	21.15	22.14	22.68	25.33	26.65	29.39								
	Nominal water pressure drop	Cooling	kPa	37	42	48	53	58	53	57	46	51	61	50	53	65								
		Heating	kPa	42	49	58	55	60	57	65	52	57	66	55	60	71								
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler																					
Fan	Nominal air flow		l/s	31,728			42,304			52,880			63,456											
	Speed		rpm	920																				
Compressor	Type		Semi-hermetic single screw compressor Inverter driven																					
	Quantity		No.	2						3														
Sound level	Sound power	Cooling	dBA	100.5			101.2			101.8			103.6											
		Heating	dBA	100.5			101.2			101.8			103.6											
	Sound pressure	Cooling	dBA	82.1			82.3			82.5			83.7											
		Heating	dBA	82.1		82.3			82.5			83.7												
Operation range	Water side	Min-Max °CDB		-8~15																				
	Air side	Min-Max °CDB		-10~45																				
Refrigerant circuit	Refrigerant type		R-134a																					
	Refrigerant charge		kg	88	94	100	118	121	124	148	177	183	186											
	No of circuits			2						3														
Power Supply	3~/400V/50Hz																							
Piping connections	Evaporator water inlet / outlet	mm		139.7						219.1														

EWYD-BZ

Air Cooled – Heat Pump Inverter

STRENGTHS

- Optimised for use with R-134a
- Cooling range: 254 - 583 kW
- Heating range: 270 - 615 kW
- EER range up to 2.87
- Standard electronic expansion valve
- DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- Seasonal quietness
- Low starting current
- No gas boiler required
- Optimised defrost cycles
- Optimum ESEER values
- Partial and heat recovery option available
- PID microprocessor control
- Power factor up to 0.95
- 2-3 truly independent refrigerant circuits
- Standard operation range down to -12°C
- Available in two sound level configurations



EWYD250BZSS

HEATING AND COOLING																							
EWYD-BZSL (Standard efficiency - Low noise)			250	270	290	320	330	360	370	400	430	450	490	510	570								
Capacity	Cooling	kW	248	266	291	316	331	355	372	403	425	448	493	510	567								
	Heating	kW	270	297	324	333	349	379	410	443	463	475	530	558	615								
Power input	Cooling	kW	88.5	98	109	113	122	132	142	149	161	156	174	183	214								
	Heating	kW	90.4	99	107	117	124	132	141	155	165	164	176	184	205								
Capacity steps	%		13 - 100 (stepless)								9 - 100 (stepless)												
EER			2.80	2.70	2.66	2.79	2.72	2.68	2.62	2.71	2.64	2.87	2.83	2.79	2.65								
COP			2.98	2.99	3.03	2.84	2.80	2.87	2.90	2.85	2.81	2.90	3.02	3.04	3.00								
ESEER			4.18	4.16	4.11	4.29	4.18	4.16	4.13	4.19	4.14	4.31	4.29	4.23	4.10								
Dimensions	(Height x Width x Depth)	mm	2,335 x 2,254 x 3,547			2,335 x 2,254 x 4,381			2,335 x 2,254 x 5,281			2,335 x 2,254 x 6,583											
Weight	Machine weight	kg	3,750	3,795	3,840	4,210	4,280	4,350	4,730	5,525	6,005	6,245	6,245										
	Operating weight	kg	3,888	3,933	3,978	4,343	4,408	4,478	4,858	5,765	6,234	6,474	6,463										
Water Heat Exchanger	Type		Single pass shell and tube																				
	Water volume	l	138			133			128			240	229	218									
	Nominal water flow rate	Cooling l/s	11.83	12.70	13.89	15.12	15.83	16.98	17.77	19.28	20.30	21.39	23.56	24.34	27.11								
		Heating l/s	12.89	14.18	15.49	15.89	16.66	18.11	19.57	21.15	22.14	22.68	25.33	26.65	29.39								
	Nominal water pressure drop	Cooling kPa	36	40	48	51	55	50.32	54.62	44.07	48.40	59.16	48	51	62								
		Heating kPa	42	49	58	55	60	57	65	52	57	66	55	60	71								
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler																				
Fan	Nominal air flow	Cooling l/s	24,432			32,576			40,720			48,864											
		Heating l/s	31,728			42,304			52,880			63,456											
	Speed	Cooling rpm	715																				
		Heating rpm	920																				
Compressor	Type		Semi-hermetic single screw compressor																				
	Quantity	No.	2																				
Sound level	Sound power	Cooling dBA	94.0			94.7			95.3			97.0											
	Heating	dBA	94.9			96.1			96.7			98.4											
	Sound pressure	Cooling dBA	75.6			75.8			76.0			77.2											
		Heating dBA	76.5			77.2			77.4			78.6											
Operation range	Water side	Min-Max °CDB	-8~15																				
	Air side	Min-Max °CDB	-10~45																				
Refrigerant circuit	Refrigerant type		R-134a																				
	Refrigerant charge	kg	88	94	100	118	121	124	148	177	183		186										
	No of circuits		2																				
Power Supply			3~/400V/50Hz																				
Piping connections	Evaporator water inlet / outlet mm		139.7																				
			219.1																				



EWAD-C-S

Air Cooled – Standard Efficiency

STRENGTHS

- Standard efficiency
- All models are PED pressure vessel approved
- Stepless single-screw compressor
- Optimised for use with R-134a
- 11 sizes to cover a range from 647 up to 1,714 kW
- EER range up to 2.93
- 2-3 truly independent refrigerant circuits
- Standard electronic expansion valve
- DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- Available in three sound level configurations
- Partial and heat recovery option available
- New MicroTech III controller

COOLING ONLY																			
EWAD-C-SS/SL (Standard noise / Low noise)			650	740	830	910	970	C11	C12	C14	C15	C16	C17						
Capacity	Cooling	kW	647	744	832	912	967	1,064	1,152	1,419	1,538	1,622	1,714						
Power input	Cooling	kW	221	262	299	318	351	378	402	500	551	580	618						
Capacity steps	% 12.5-100 (stepless)		7.0-100 (stepless)																
EER	2.93		2.84	2.78	2.87	2.76	2.82	2.86	2.84	2.79	2.8	2.77							
ESEER	3.95		3.87	3.89	3.84	3.8	3.88	3.84	3.88	3.9	3.87	3.78							
Dimensions	(Height x Width x Depth)	mm	2,540 x 2,285 x 6,185																
Weight (EWAD-C-SS)	Machine weight	kg	5,630	5,740	5,760	6,280	6,560	7,010	7,280	10,310	10,320	10,710	10,770						
	Operating weight	kg	5,910	5,990	6,010	6,530	6,810	7,250	7,520	10,730			11,110						
Weight (EWAD-C-SL)	Machine weight	kg	5,920	6,030	6,050	6,570	6,850	7,300	7,570	10,750	10,770	11,150	11,210						
	Operating weight	kg	6,200	6,280	6,300	6,820	7,100	7,540	7,810	11,170			11,550						
Water Heat Exchanger	Type		Single pass shell and tube																
	Water volume	l	266	251		243		421	408		474								
	Nominal water flow rate	Cooling l/s	30.90	35.56	39.74	43.60	46.21	50.85	55.04	67.78	73.50	77.51	81.89						
	Nominal water pressure drop	Cooling kPa	73	59	52	61	68	63	72	47	59	65	73						
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler																
Fan	Nominal air flow	l/s	53,444		64,133		74,822	85,510	106,888		117,577								
	Speed	rpm	920																
Compressor	Type		Semi-hermetic single screw compressor																
	Quantity	No.	2		3														
Sound level (EWAD-C-SS)	Sound power	Cooling dBA	99.5	100.0	100.9	101.1	101.5	101.7	102.9	103.0	103.2	103.3							
	Sound pressure	Cooling dBA	79.0	79.5	80.4	80.6		81.0	81.1		81.2								
Sound level (EWAD-C-SL)	Sound power	Cooling dBA	96.0	96.1	97.5	97.1	97.6	98.1	99.1		99.5								
	Sound pressure	Cooling dBA	75.5	75.6	76.5	76.6	76.8	76.9	77.2		77.3		77.4						
Operation range	Water side	Min~Max °CDB	-8~15																
	Air side	Min~Max °CDB	-18~46																
Refrigerant circuit	Refrigerant type		R-134a																
	Refrigerant charge	kg	128	146	144	162	178	260		261		3							
	No of circuits		2																
Power Supply			3~/400V/50Hz																
Piping connections	Evaporator water inlet / outlet	mm	168.3		219.1														

COOLING ONLY																			
EWAD-C-SR (Reduced noise)			620	720	790	880	920	C10	C11	C13	C14	C15	C16						
Capacity	Cooling	kW	619	715	789	876	922	1,020	1,112	1,367	1,471	1,556	1,623						
Power input	Cooling	kW	223	272	315	331	369	395	417	517	576	603	647						
Capacity steps	%		12.5-100 (stepless)																
EER	2.77		2.62	2.51	2.65	2.5	2.59	2.67	2.64	2.55	2.58	2.51							
ESEER	4.08		3.96	3.98	3.99	4	3.96	3.96	3.9	3.87	3.9	3.83							
Dimensions	(Height x Width x Depth)	mm	2,540 x 2,285 x 6,185																
Weight	Machine weight	kg	5,920	6,030	6,050	6,570	6,850	7,300	7,570	10,750	10,770	11,150	11,210						
	Operating weight	kg	6,200	6,280	6,300	6,820	7,100	7,540	7,810	11,170	11,550	11,700							
Water Heat Exchanger	Type		Single pass shell and tube																
	Water volume	l	266	251		243		421	408		474								
	Nominal water flow rate	Cooling l/s	29.57	34.15	37.71	41.83	44.05	48.75	53.11	65.32	70.28	74.32	77.57						
	Nominal water pressure drop	Cooling kPa	67	55	47	57	62	58	68	44	54	60	66						
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler																
Fan	Nominal air flow	l/s	41,006		49,207		57,408	65,610	82,012		90,213								
	Speed	rpm	715																
Compressor	Type		Semi-hermetic single screw compressor																
	Quantity	No.	2		3														
Sound level	Sound power	Cooling dBA	91.5	92.0	92.5	93.0	93.5	93.8	94.8	94.9	95.1	95.2							
	Sound pressure	Cooling dBA	71.0	71.5	72	72.5	72.6	72.7	72.9	73.0	73.1								
Operation range	Water side	Min~Max °CDB	-8~15																
	Air side	Min~Max °CDB	-18~46																
Refrigerant circuit	Refrigerant type		R-134a																
	Refrigerant charge	kg	128	146	144	162	178	260		261		3							
	No of circuits		2																
Power Supply			3~/400V/50Hz																
Piping connections	Evaporator water inlet / outlet	mm	168.3		219.1														



EWAD-C-X

Air Cooled – High Efficiency

STRENGTHS

- High efficiency
- All models are PED pressure vessel approved
- Stepless single-screw compressor
- Optimised for use with R-134a
- 14 sizes to cover a range from 756 up to 1,858 kW
- EER range up to 3.29
- 2-3 truly independent refrigerant circuits
- Standard electronic expansion valve
- DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- Available in three sound level configurations
- Partial and heat recovery option available
- New MicroTech III controller

COOLING ONLY																
EWAD-C-XS/XL (Standard noise / Low noise)			760	830	890	990	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19
Capacity	Cooling	kW	756	830	889	1,001	1,074	1,196	1,280	1,349	1,409	1,526	1,596	1,685	1,768	1,858
Power input	Cooling	kW	233	253	278	307	338	364	400	411	437	474	504	533	561	590
Capacity steps	%		12.5-100 (stepless)						7.0-100 (stepless)							
EER			3.25	3.28	3.2	3.26	3.18	3.29	3.2	3.29	3.23	3.22	3.17	3.16	3.15	3.15
ESEER			4.02	4.11	4.02	4.11	4.05	4.14	4.02	4.28	4.23	4.19	4.17	4.16	4.13	4.13
Dimensions	(Height x Width x Depth)	mm	2,540x2,285x6,185	2,540x2,285x7,085	2,540x2,285x7,985	2,540x2,285x9,785	2,540x2,285x9,785	2,540x2,285x9,785	2,540x2,285x11,985	2,540x2,285x12,885	2,540x2,285x13,785	2,540x2,285x14,685				
Weight (EWAD-C-XS)	Machine weight	kg	5,990	6,340	6,360	7,190	7,470	8,220	8,240	8,900	10,560	11,310	11,570	11,900	12,260	12,600
	Operating weight	kg	6,240	6,580	6,600	7,600	7,870	8,610	8,630	9,890	11,040	12,170	12,430	12,760	13,140	13,470
Weight (EWAD-C-XL)	Machine weight	kg	6,280	6,630	6,650	7,480	7,760	8,510	8,530	9,190	11,000	11,760	12,010	12,350	12,700	13,040
	Operating weight	kg	6,520	6,870	6,890	7,880	8,160	8,900	8,920	10,180	11,490	12,610	12,870	13,200	13,580	13,910
Water Heat Exchanger	Type		Single pass shell and tube													
	Water volume	l	251	243	403	386	979	491	850	850	871	850				
	Nominal water flow rate	Cooling l/s	36.10	39.67	42.49	47.82	51.32	57.13	61.18	64.45	67.34	72.90	76.24	80.48	84.47	88.79
	Nominal water pressure drop	Cooling kPa	80	56	64	61	69	45	51	71	77	57	62	68	64	37
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler													
Fan	Nominal air flow	l/s	64,133	74,822	85,510	106,888	128,266	138,954	149,643	160,332						
	Speed	rpm				920										
Compressor	Type		Semi-hermetic single screw compressor													
	Quantity	No.			2						3					
Sound level (EWAD-C-XS)	Sound power	Cooling dBA	100.2	100.5	101.4	101.9	102.4	102.5	102.9	103.1	103.2	103.5	103.7	103.9		
	Sound pressure	Cooling dBA		79.7		80.2	80.7	80.3	80.4	80.5	80.7	80.9	80.8	80.8	81	
Sound level (EWAD-C-XL)	Sound power	Cooling dBA	96.8	97.4	98	98.2	98.8	98.9	99.6	100	100.2	100.4				
	Sound pressure	Cooling dBA		76.3	76.5	76.9	77.1	76.7	76.8	77.1	77.2	77.3	77.4	77.5		
Operation range	Water side	Min~Max °CDB					8~15									
	Air side	Min~Max °CDB					-18~50									
Refrigerant circuit	Refrigerant type		R-134a													
	Refrigerant charge	kg	146	162	182	214	225	291	297	312	328	343				
	No of circuits				2					3						
Power Supply			3~/400V/50Hz													
Piping connections	Evaporator water inlet / outlet	mm	168.3		219.1	273	219.1			273						

COOLING ONLY																
EWAD-C-XR (Reduced noise)			740	810	870	970	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19
Capacity	Cooling	kW	736	811	866	974	1,041	1,168	1,247	1,302	1,378	1,486	1,550	1,639	1,722	1,813
Power input	Cooling	kW	235	254	281	309	343	365	404	415	438	479	513	541	567	595
Capacity steps	%		12.5-100 (stepless)						7.0-100 (stepless)							
EER			3.14	3.2	3.08	3.15	3.03	3.2	3.08	3.14	3.15	3.1	3.03	3.04		
ESEER			4.29	4.36	4.23	4.34	4.24	4.38	4.25	4.33	4.34	4.26	4.2	4.21	4.2	
Dimensions	(Height x Width x Depth)	mm	2,540x2,285x6,185	2,540x2,285x7,085	2,540x2,285x7,985	2,540x2,285x9,785	2,540x2,285x9,785	2,540x2,285x9,785	2,540x2,285x11,985	2,540x2,285x12,885	2,540x2,285x13,785	2,540x2,285x14,685				
Weight	Machine weight	kg	6,280	6,630	6,650	7,480	7,760	8,510	8,530	9,190	11,000	11,760	12,010	12,350	12,700	13,040
	Operating weight	kg	6,520	6,870	6,890	7,880	8,160	8,900	8,920	10,180	11,490	12,610	12,870	13,200	13,580	13,910
Water Heat Exchanger	Type		Single pass shell and tube													
	Water volume	l	251	243	403	386	979	491	850	850	871	850				
	Nominal water flow rate	Cooling l/s	35.17	38.74	41.36	46.54	49.76	55.78	59.56	62.21	65.85	70.98	74.07	78.32	82.30	86.61
	Nominal water pressure drop	Cooling kPa	76	54	61	58	65	43	49	67	74	54	59	65	61	35
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler													
Fan	Nominal air flow	l/s	49,207	57,408	65,610	82,012	98,414	106,616	114,817	123,018						
	Speed	rpm				715										
Compressor	Type		Semi-hermetic single screw compressor													
	Quantity	No.			2						3					
Sound level	Sound power	Cooling dBA	92	92.3	93.5	93.7	94.3	94.5	94.4	95.1	95.2	95.3	95.6	95.7	95.9	
	Sound pressure	Cooling dBA		71.5	72.3	72.5	72.2	72.3	72.6	72.8	72.9	73.0				
Operation range	Water side	Min~Max °CDB					8~15									
	Air side	Min~Max °CDB					-18~50									
Refrigerant circuit	Refrigerant type		R-134a													
	Refrigerant charge	kg	146	162	182	214	225	291	297	312	328	343				
	No of circuits				2					3						
Power Supply			3~/400V/50Hz													
Piping connections	Evaporator water inlet / outlet	mm	168.3		219.1	273	219.1			273						



EWAD-C-P

Air Cooled – Premium Efficiency

STRENGTHS

- Premium efficiency
- All models are PED pressure vessel approved
- Stepless single-screw compressor
- Optimised for use with R-134a
- 7 sizes to cover a range from 821 up to 1,390 kW
- EER range up to 3.64
- 2 truly independent refrigerant circuits
- Standard electronic expansion valve
- DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- Available in three sound level configurations
- Partial and heat recovery option available
- New MicroTech III controller

COOLING ONLY									
EWAD~C-PS/PL (Standard noise / Low noise)			820	890	980	C11	C12	C13	C14
Capacity	Cooling	kW	821	890	975	1,074	1,158	1,279	1,390
Power input	Cooling	kW	225	249	274	301	330	363	396
Capacity steps	% 12.5-100 (stepless)								
EER			3.64	3.58	3.56	3.51	3.52	3.51	
ESEER			4.44	4.5	4.41	4.53	4.39	4.44	4.31
Dimensions	(Height x Width x Depth)	mm	2,540 x 2,285 x 8,885			2,540 x 2,285 x 9,785	2,540x2,285x11,085	2,540x2,285x11,985	
Weight (EWAD~C-PS)	Machine weight	kg	7,530	7,660	8,290	8,550	9,390	9,730	
	Operating weight	kg	8,130	8,700	9,330	9,590	10,380	10,720	
Weight (EWAD~C-PL)	Machine weight	kg	7,820	7,950	8,580	8,840	10,380	10,020	
	Operating weight	kg	8,420	8,990	9,620	9,880	10,670	11,010	
Water Heat Exchanger	Type		Single pass shell and tube						
	Water volume	l	599		1,043	1,027	995	979	
	Nominal water flow rate	Cooling l/s	39.22	42.53	46.6	51.3	55.31	61.12	66.41
	Nominal water pressure drop	Cooling kPa	57	65	30	61	69	60	73
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler						
Fan	Nominal air flow	l/s	96,199			106,888	117,577	128,266	
	Speed	rpm	920						
Compressor	Type		Semi-hermetic single screw compressor						
	Quantity	No.	2						
Sound level (EWAD~C-PS)	Sound power	Cooling dBA	101		101.8	102.3	102.6	102.9	
	Sound pressure	Cooling dBA	79.5		80.0	80.5	80.4	80.5	
Sound level (EWAD~C-PL)	Sound power	Cooling dBA	98.4		98.8	99.9	99.3	99.6	
	Sound pressure	Cooling dBA	76.9		77	77.1	77.1	77.2	
Operation range	Water side	Min~Max °CDB	-8~15						
	Air side	Min~Max °CDB	-18~52						
Refrigerant circuit	Refrigerant type		R-134a						
	Refrigerant charge	kg	204	202	204	220	252	254	
	No of circuits		2						
Power Supply			3~/400V/50Hz						
Piping connections	Evaporator water inlet / outlet	mm	219.1			273			

COOLING ONLY									
EWAD~C-PR (Reduced noise)			810	880	960	C10	C11	C13	C14
Capacity	Cooling	kW	809	875	956	1,053	1,132	1,251	1,359
Power input	Cooling	kW	219	244	272	299	330	364	396
Capacity steps	%		12.5-100 (stepless)						
EER			3.7	3.58	3.51	3.52	3.43	3.44	3.43
ESEER			4.63	4.59	4.54	4.59	4.5	4.53	4.51
Dimensions	(Height x Width x Depth)	mm	2,540 x 2,285 x 8,885			2,540 x 2,285 x 9,785	2,540x2,285x11,085	2,540x2,285x11,985	
Weight	Machine weight	kg	7,820	7,950	8,580	8,840	10,380	10,020	
	Operating weight	kg	8,420	8,990	9,620	9,880	10,670	11,010	
Water Heat Exchanger	Type		Single pass shell and tube						
	Water volume	l	599		1,043	1,027	995	979	
	Nominal water flow rate	Cooling l/s	38.65	41.81	45.69	50.30	54.11	59.76	64.95
	Nominal water pressure drop	Cooling kPa	56	63	29	59	66	58	70
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler						
Fan	Nominal air flow	l/s	73,811			82,012	90,213	98,414	
	Speed	rpm	715						
Compressor	Type		Semi-hermetic single screw compressor						
	Quantity	No.	2						
Sound level	Sound power	Cooling dBA	92.7		93.4	93.8	94.1	94.4	
	Sound pressure	Cooling dBA	71.2		71.7	72			
Operation range	Water side	Min~Max °CDB	-8~15						
	Air side	Min~Max °CDB	-18~52						
Refrigerant circuit	Refrigerant type		R-134a						
	Refrigerant charge	kg	204	202	204	220	252	254	
	No of circuits		2						
Power Supply			3~/400V/50Hz						
Piping connections	Evaporator water inlet / outlet	mm	219.1			273			

ERAD-E

Remote Evaporator



ERAD-E

STRENGTHS

- Wye delta starter (y-d)
- Double setpoint
- Fans circuit breakers with thermal overload relays
- Phase monitor
- Discharge line shut off valve
- Suction line shut off valve
- Ambient outside temperature sensor and set-point reset
- Hour run meter
- General fault contactor
- Set-point reset, demand limit and alarm
- Fans circuit breakers
- Main switch interlock.

OPTIONS (factory mounted)

- Total heat recovery
- Partial heat recovery
- Under / overvoltage control
- Energy meter
- Capacitors cosfi 0.9
- Current limit - display
- Speedtrol (fan speed control device on/off – up to -18°C)
- Condenser coil guards
- Cu-cu condenser coil
- Cu-cu sn condenser coil
- Alucoat fins coil
- High pressure side manometers
- Double pressure relief valve with diverter
- Automatic circuit breakers.

ACCESSORIES (kit)

- BMS gateway (MODBUS/J-BUS/BACNET protocol)
- Remote user interface.

CONTROL

- Return air or room temperature control
- Weekly operating schedule.

AVAILABLE INPUTS / OUTPUTS

Input

- ON/OFF
- Dual setpoint through analog signal
- Air flow switch
- Capacity limit.

Output

- Compressor operation
- Summary alarm.

COOLING ONLY

Large condensing unit (Standard noise level)			ERAD120E-SS	ERAD140E-SS	ERAD170E-SS	ERAD200E-SS	ERAD220E-SS	ERAD250E-SS	ERAD310E-SS	ERAD370E-SS	ERAD440E-SS	ERAD490E-SS
Capacity	Nominal cooling	kW	121	144	165	196	219	252	306	370	435	488
EER			2.89	2.82	2.87	3.01	2.97	3.29	3.3	3.03	2.96	3.03
Refrigerant								R134a				
Dimensions	Length	mm	2170					3070				
	Height	mm			2.27				2220			
	Width	mm				1290			2240			
Electrical details	Power supply	V					400					
		Hz					50					
		ph						3				

COOLING ONLY

Large condensing unit (Low noise level)			ERAD120E-SL	ERAD140E-SL	ERAD160E-SL	ERAD190E-SL	ERAD210E-SL	ERAD240E-SL	ERAD300E-SL	ERAD350E-SL	ERAD410E-SL	ERAD460E-SL
Capacity	Nominal cooling	kW	116	137	159	187	209	243	295	352	409	462
EER			2.74	2.61	2.76	2.82	2.83	3.11	3.22	2.88	2.72	2.76
Refrigerant								R134a				
Dimensions	Length	mm	2170					3070				
	Height	mm			2.27				2220			
	Width	mm				1290			2240			
Electrical details	Power supply	V					400					
		Hz					50					
		ph						3				

EWWP-KAW1N

Water Cooled



EWWP014KAW1N



pCO²

STRENGTHS

- One of the most compact units in the market (60cm x 60cm x 60cm for models 014 to 035).
- Daikin scroll compressor.
- Standard reverse phase protection.
- Extension possible up to 195kW.

For single module units

- Standard main isolator switch.
- Basic hydraulic components for KA-series included with the unit as a kit: flow switch, air purge, filter + shut-off valves for both condenser and evaporator.

OPTIONS (factory mounted)

- Chilled water temperature down to - 5°C (OPZH) or -10°C (OPZL).

ACCESSORIES (kit)

- Compressor soundproof material (-3dBA).
- Hydraulic module.
- BMS gateway (MODBUS/J-BUS / BACNET protocol).
- Remote user interface.

CONTROL

- Microprocessor control.
- Water inlet temperature control.
- Cold water or hot water regulation.

AVAILABLE INPUTS/OUTPUTS

Input

- Remote ON/OFF.
- Pump contact.
- Cool/heat selection.

Output

- Compressor operation.
- Summary alarm.
- Pump relay contact.

The range of chillers EWWP014-065KAW1 can be extended up to 195kW in a modular way.

Units EWWP090-195KAW1 is a combination of up to 3 modules EWWP045-065KAW1, combined with control box ECB2/3MUW.

For configuration guidelines, see below table or contact your local DAIKIN office.

COOLING ONLY/HEATING ONLY			014	022	028	035	045	055	065	90	100	110	120	130	145	155	165	175	185	195
Capacity	Cooling	kW	13.0	21.5	28.0	32.5	43.0	56	65.0	86.0	99.0	112	121	130	142	155	168	177	186	195
Nominal input	Cooling	kW	3.61	5.79	7.48	8.75	12.1	16	18.3	23.6	27.3	31.0	33.1	35.2	39.1	42.8	46.5	48.6	50.7	52.8
EER			3.60	3.71	3.74	3.71	3.55	3.5	3.55	3.64	3.63	3.61	3.66	3.69	3.63	3.62	3.61	3.64	3.67	3.69
Capacity Steps		%			1			2			4						6			
Dimensions	(Height x Width x Depth)		600x600x600			600x600x1200			1200x600x1200			1800x600x1200								
Unit		kg	118	155	165	172	300	320	334	600	620	640	654	668	920	940	960	974	988	1002
Water Heat Exchanger	Type		Brased plate																	
	Minimum water volume in the system	l	62	103	134	155	205	268	311	205	268	311	205	268	311	205	268	311	311	
	Water flow rate	Min l/min	24	39	51	59	79	102	118	157	181	205	221	237	260	283	307	323	339	355
		Nominal l/min	48	78	102	118	157	205	237	314	362	410	442	474	519	567	614	647	679	711
		Max l/min	95	157	203	237	314	410	474	629	724	819	883	948	1038	1133	1229	1293	1357	1422
Sound Power	Cooling	dBA	64		71		67		74	71		75		77	73		76	78	79	
Compressor	Type		Hermetically sealed scroll compressor																	
	Model	Quantity	1		2		4	2	4	2	4		2	6		2	6		6	
Refrigerant circuit	Refrigerant type		R-407C																	
	Refrigerant charge	kg	1.2	2	2.5	3.1	4.6	5.6		9.2	10.2	11.2		13.8		14.8	15.8	16.8		
	No of circuits		1		2				4							6				
	Refrigerant control		Thermostatic expansion valve																	
Power Supply			3N~/400V/50Hz																	
Piping connections	Evaporator water inlet/outlet		fbsp 25 field installation		fbsp 40 field installation					2 x 2 x fbsp 38 field installation					3 x 2 x fbsp 38 field installation					
	Condensor water inlet/outlet		fbsp 25 field installation		fbsp 40 field installation					2 x 2 x fbsp 38 field installation					3 x 2 x fbsp 38 field installation					

EWWP-KAW1N

Water Cooled




EWWP014-035KAW1N



EWWP090-130KAW1N



EWWP145-195KAW1N

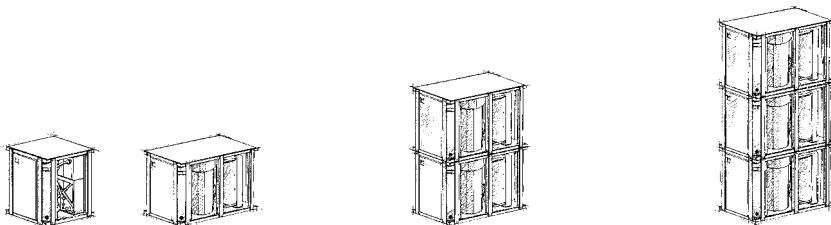

SELECTION TABLE		1 MODULE (KA-SERIES)							2 MODULES (KA-SERIES)							3 MODULES (KA-SERIES)						
Capacity index		014	022	028	035	045	055	065	090	100	110	120	130	145	155	165	175	185	195			
Cooling capacity (kW)		13	21.5	28	32.5	43	56	65	86	99	112	121	130	142	155	168	177	186	195			
Heating capacity (kW)		16	26.2	35.3	41	52.5	71	81	105	124	142	153	164	176	195	213	224	235	246			
UNIT + CONTROL (factory mounted)	EWWP014KAW1N	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	EWWP022KAW1N	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	EWWP028KAW1N	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	EWWP035KAW1N	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	EWWP045KAW1N	-	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-			
	EWWP055KAW1N	-	-	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-			
	EWWP065KAW1N	-	-	-	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-			
UNIT ONLY (Without Control)	EWWP045KAW1M	-	-	-	-	1	-	-	2	1	-	-	-	2	1	-	-	-	-			
	EWWP055KAW1M	-	-	-	-	-	1	-	-	1	2	1	-	1	2	3	2	1	-			
	EWWP065KAW1M	-	-	-	-	-	-	1	-	-	1	2	-	-	1	2	3	-	-			
CONTROL (Kit)	ECB 1 MUW	-	-	-	-	1	1	1	-	-	-	-	-	-	-	-	-	-	-			
	ECB 2 MUW	-	-	-	-	-	-	-	1	1	1	1	-	-	-	-	-	-	-			
	ECB 3 MUW	-	-	-	-	-	-	-	-	-	-	-	-	1	1	1	1	1	1			

For example: for a 121 kW -HP system, select :

EWWP055KAW1
+ EWWP065KAW1

EWWD-MBYN

Water Cooled



EWWD120MBYN



pCO²

STRENGTHS

- Compact and modular design.
- DAIKIN stepless single screw compressor.
- Standard reverse phase protection.
- VICTAULIC joints.
- DICN operation as standard within same series.
- Standard discharge shut-off valve.
- Standard filter, flow switch.

OPTIONS (factory mounted)

- Main isolator switch.
- Low noise (-5 to -7dB(A)).
- Compressor suction stopvalve.
- Ampere & Voltmeter (read-out on switchbox).
- Chilled water temperature down to - 5°C (ZH) or -10°C (ZL).
- Dual pressure relief valve.

ACCESSORIES (kit)

- BMS gateway (MODBUS/J-BUS / BACNET protocol).
- Remote user interface (EKRUPC).

CONTROL

- Microprocessor control.
- Water inlet or outlet temperature control.
- Weekly operating schedule.

AVAILABLE INPUTS/OUTPUTS

Input

- ON / OFF.
- Pump contact.
- Dual setpoint through analog signal.
- Floating setpoint.

Output

- Compressor operation.
- Summary alarm (per circuit).
- Pump relay contact.

COOLING ONLY/HEATING ONLY

		120	180	240	280	360	440	500	520	540								
Capacity	Cooling	kW	123.00	183.00	249.00	273.00	366.00	432.00	498.00	522.00	546.00							
	Heating	kW	147.00	216.00	290.00	327.00	431.00	505.00	580.00	617.00	655.00							
Nominal input	Cooling	kW	28.70	45.20	61.60	69.20	90.50	107.00	123.00	131.00	138.00							
	Heating	kW	34.50	54.00	72.80	83.40	108.00	127.00	146.00	156.00	167.00							
EER			4.29	4.05	4.04	3.95		4.04	4.05	3.98	3.96							
COP			4.26	4	3.98	3.92	3.99	3.98	3.97	3.96	3.92							
Capacity Steps	%		30-100 stepless				15-100 stepless											
Dimensions	(Height x Width x Depth)	mm	1018x2681 (3051)x930				2000x2681 (3254)x930											
Unit		kg	1000	1273	1527	1623	2546	2800	3034	3150	3346							
Operating Weight		kg	1032	1318	1588	1693	2636	2906	3156	3281	3485							
Water Heat Exchanger	Type		Shell and tube															
	Minimum water volume in the system	l	600	890	1220	1330	895	1055	1215	1275	1335							
	Water flow rate	Min l/min	217	336	450	520	670	790	900	970	1040							
		Nominal l/min	435	654	890	981	1309	1545	1781	1871	1962							
		Max l/min	800	1050	1230	1370	2100	2290	2470	2600	2730							
Sound Power	Cooling	dBA	87	93	94	93					96							
Compressor	Type		Semi-hermetic single screw compressor															
	Model	Quantity	1				2	1	2	1	2							
Refrigerant circuit	Refrigerant type		R-134a															
	Refrigerant charge	kg	18.0	35.0	37.0	38.0	70.0	72.0	74.0	75.0	76.0							
	No of circuits		1				2											
	Refrigerant control		Thermostatic expansion valve	Electronic expansion valve		Thermostatic expansion valve	Electronic expansion valve											
Power Supply			3~/400V/50Hz															
Piping connections	Evaporator water inlet/outlet		3" odvc field installation															
	Condensor water inlet/outlet		3" victaulic m6															
	Relief device outlet		1x1"		2x1"		3x1"		4x1"									

EWWD-DJYNN

Water Cooled



EWWD-DJYNN



pCO²

STRENGTHS

- All models are PED pressure vessel approved
- Stepless single-screw compressor
- Optimised for use with R-134a
- Cooling range: 165.5–555.7kW
- EER range up to 4
- 1-2 truly independent refrigerant circuits
- Standard electronic expansion valve
- DX shell and tube evaporator – one pass
- Refrigerant side for easy oil circulation and return

STANDARD AVAILABLE

- Glycol application
- Suction stop valve
- Main switch
- Gauges
- Electronic expansion valve

OPTIONS (factory mounted)

- Total heat recovery
- Partial heat recovery
- Power factor 0.9
- A/V meter
- Low noise
- Soft starter
- Cu/ni heat exchanger

ACCESSORIES

- Communication cards (EKAC200J – EKACLON)
- Bacnet gateway (EKBMSBNJ)
- Remote user interface (EKRUPCK)
- Buffer tanks (EKBT500N - EKBTC10N - EKBT500C - EKBTC500C)
- Sequencing panel (EKCSCLII)
- Plant visor (EKPV2J)
- Modem (EKMODEM – EKGSMOD)
- Converter RS485 to RS 232 (EKCON)

COOLING ONLY			170	210	260	300	320	380	420	460	500	600							
Capacity	Cooling	kW	165.5	201.2	252.8	280.4	333.9	372.2	402.5	448.3	493.7	555.7							
Nominal input	Cooling	kW	42.1	50.7	64.9	75.4	84.3	93.1	101.4	115.1	129.0	150.2							
EER			3.93	3.97	3.9	3.72	3.96	4	3.97	3.89	3.83	3.7							
Capacity Steps	%		stepless 25-100			stepless 12.5-100													
Dimensions	(Height x Width x Depth)		1860x3435x920			1880x4305x860													
Unit		kg	1393	1410	1503	2687	2697	2702	2757	2762									
Operating Weight		kg	1470	1480	1650	2840	2850	2860			2970								
Water Heat Exchanger	Type		Shell and tube																
	Minimum water volume in the system	l	13	15	26	28				30									
	Water flow rate	Min l/min	303	357	363	368	603	659	718	726	729	741							
		Nominal l/min	595	722	911	1020	1199	1334	1445	1615	1785	2024							
		Max l/min	959	1128	1147	1162	1908	2083	2270	2296	2305	2344							
Sound Power	Cooling	dBA	69.7			71.7													
Compressor	Type		Semi-hermetic single screw compressor																
	Model	Quantity	1			2		1	2	1	2								
Refrigerant circuit	Refrigerant type		R-134a																
	Refrigerant charge	kg	50			100													
	No of circuits		1			2													
	Refrigerant control		Electronic expansion valve																
Power Supply			3~/400V/50Hz																
Piping connections	Evaporator water inlet/outlet		1/2" gas																

EWWD-DJYNN/A

Water Cooled



EWWD-DJYNN/A



pCO²

STRENGTHS

- High efficiency
- EER range up to 4.7
- All models are PED pressure vessel approved
- Stepless single-screw compressor
- Optimised for use with R-134a
- Cooling range: 186.4–603.9kW
- 1-2 truly independent refrigerant circuits
- Standard electronic expansion valve
- DX shell and tube evaporator – one pass
- Refrigerant side for easy oil circulation and return

STANDARD AVAILABLE

- Glycol application
- Suction stop valve
- Main switch
- Gauges
- Electronic expansion valve

OPTIONS (factory mounted)

- Total heat recovery (190-230-28-320-380-400-460-500)
- Partial heat recovery
- Power factor 0.9
- A/V meter
- Low noise
- Soft starter
- Cu/ni heat exchanger

ACCESSORIES


- Communication cards (EKAC200J – EKACLON)
- Bacnet gateway (EKBMSBNJ)
- Remote user interface (EKRUPCK)
- Buffer tanks (EKBT500N - EKBT500C - EKBC500C)
- Sequencing panel (EKCSCLII)
- Plant visor (EKPV2J)
- Modem (EKMODEM – EKGSMOD)
- Converter RS485 to RS 232 (EKCON)

COOLING ONLY

		190	230	280	320	380	400	460	500	550	650			
Capacity	Cooling	kW	186.4	223.3	276.5	306.7	366.3	408.2	443.6	496	540.5			
Nominal input	Cooling	kW	39.7	48.1	59.3	71.4	79.3	87.2	95	104.8	114.4			
EER			4.7	4.64	4.66	4.3	4.62	4.68	4.67	4.73	4.72			
Capacity Steps	%		stepless 25-100				stepless 12.5-100							
Dimensions	(Height x Width x Depth)	mm	1860x3435x920				1880x4305x860							
Unit		kg	1650	1665	1680		2800	2945	2955	2975	2990			
Operating Weight		kg	1800	1810	1820		3020	3280	3290	3315	3340			
Water Heat Exchanger	Type		Shell and tube											
	Minimum water volume in the system	l	22	25		44	47	50	59	68				
	Water flow rate	Min l/min	497	550	609	648	994	1089	1202	1362	1533			
		Nominal l/min	648	778	963	1084	1277	1420	1544	1722	1877			
		Max l/min	1572	1740	1925	2048	3145	3444	3801	4306	4847			
Sound Power	Cooling	dBA	69.7				71.7							
Compressor	Type		Semi-hermetic single screw compressor											
	Model	Quantity	1				2	1	2	1	2			
Refrigerant circuit	Refrigerant type		R-134a											
	Refrigerant charge	kg	50				100							
	No of circuits		1				2							
	Refrigerant control		Electronic expansion valve											
Power Supply			3~/400V/50Hz											

EWWD-EJYNN

Water Cooled

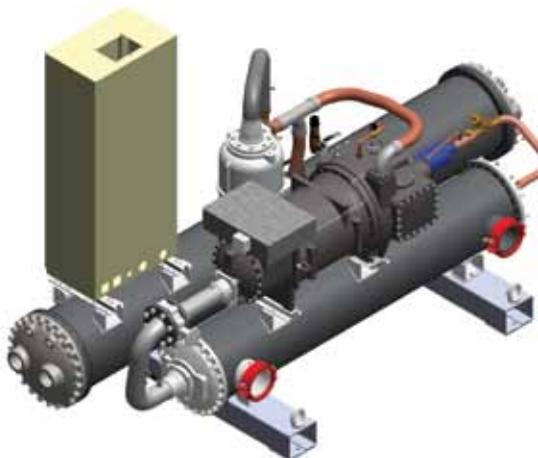

EWWD-EJYNN



pCO²

STRENGTHS


- All models are PED pressure vessel approved
- Stepless single-screw compressor
- Optimised for use with R-134a
- Cooling range: 333-1,510 kW
- EER range: 4.28-4.66
- 1-2-3 truly independent refrigerant circuits
- Standard electronic expansion valve
- DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- Partial and total heat recovery option available

HEATING ONLY AND COOLING ONLY

		340	400	460	550	650	700	800	850	900	950	C10	C12	C13	C14	C15	C16	C17	C18										
Capacity	Cooling	kW	333	394	460	538	640	705	782	844	910	986	1,027	1,155	1,204	1,274	1,346	1,401	1,455	1,510									
Power input	Cooling	kW	71.45	85.84	100.86	120.36	141.34	155.85	171.32	185.55	200.01	218.45	236.91	254.34	267.70	282.46	298.23	316.48	334.72	352.96									
EER			4.66	4.59	4.56	4.47	4.53	4.52	4.56	4.55	4.51	4.33	4.54	4.50	4.51	4.43	4.35	4.28											
Dimensions	(Height x Width x Depth)	mm	1,983 x 1,430 x 3,533						2,245 x 1,350 x 4,769						2,398 x 2,153 x 4,470														
Weight	Machine weight	kg	2,640	2,745	2,772	5,056	5,121	5,205	5,219	5,233	5,268	6,079	6,097	6,136	6,174	6,192	6,210	6,228											
	Operating weight	kg	5,051	5,203	5,244	9,543	9,623	9,730	9,754	9,779	9,826	6,718	6,744	6,776	6,805	6,831	6,856	6,883											
Water Heat Exchanger Evaporator	Type		Shell and tube																										
	Water volume	l	1,058	1,263	1,478	1,729	868	957	1,088	1,144	1,204	1,346	1,356	718	754	793	832	871	909	948									
	Water flow rate	Min l/min	179.4	214.2	250.5	293.1	356.9	393.2	447.3	470.2	494.7	553.3	557.5	651.2	684	719.1	755.3	790.2	825.1	860									
		Nominal l/min	954.1	1,128.7	1,318.1	1,542.6	1,834.6	2,019.8	2,242.3	2,420.6	2,609.2	2,827.4	2,943.9	3,312.1	3,451.6	3,652.1	3,859.2	4,015.7	4,172.2	4,328.8									
		Max l/min	1,614.6	1,898.8	2,214.4	2,587.7	3,021.1	3,320.3	3,687.3	3,994	4,233.4	4,642.1	4,701.7	5,368.5	5,581.7	5,965.6	6,344.2	6,588.5	6,832.8	7,077.1									
	Nominal water pressure drop	Cooling kPa	37.02	50.09	53.74	61.91	55.15	44.15	58.38	53.42	53.15	66.29	51.25	51.73	55.72	44.69	57.68	61.96	66.37	70.92									
Water Heat Exchanger Condenser	Type		Shell and tube																										
	Water volume	l	1,871	2,199	2,568	2,864	1,538	1,676	1,855	1,977	2,102	2,257	2,278	1,237	1,303	1,372	1,440	1,486	1,533	1,579									
	Water flow rate	Min l/min	317	372.3	435.8	484.8	632.2	688.9	762.6	812.6	864.1	927.9	936.4	1,122.5	1,182.3	1,244.5	1,306.2	1,348.5	1,390.7	1,433									
		Nominal l/min	1,158.9	1,374.8	1,607.2	1,887.6	2,239.8	2,466.5	2,733.4	2,952.5	3,182.6	3,435.6	3,623	4,041.2	4,219	4,461.9	4,714.1	4,922.9	5,131.8	5,340.6									
		Max l/min	1,868.3	2,207	2,576.6	3,017.3	3,516.5	3,870.2	4,296.6	4,654.2	4,940.1	5,416.2	5,532.1	6,265.4	6,523.5	6,963.4	7,401.7	7,709.2	8,016.7	8,324.2									
	Nominal water pressure drop	Cooling kPa	26.35	27.95	29.76	25.65	24.78	25.41+	27.65+	28.04+	26.45+	22.66+	23.82+	3x	2x24.08	24.55+	3x	2x23.86	23.86+	3x									
Compressor	Type		Screw compressor																										
	Model	Quantity	1						2						3														
Sound power	Cooling	dBA	93.6	94.6	96.6	96.9	97.3	97.8	98.9	99.8	98.3	98.6	100.6	101.2		101.8													
	Evaporator	Min~Max °C	-8 (OPZL) ~15																										
	Condenser	Min~Max °C	15~55																										
Refrigerant circuit	Refrigerant type		R-134a																										
	Refrigerant charge	kg	54	52	108	106			104						156														
	No of circuits		1						2						3														
	Refrigerant control		Electronic expansion valve																										
Power Supply			3~/400V/50Hz																										
Piping connections	Evaporator water inlet / outlet	mm	168.30												219.10														
	Condenser water inlet / outlet		5"																										

EWWD-EJYNN/A

Water Cooled –
High Efficiency

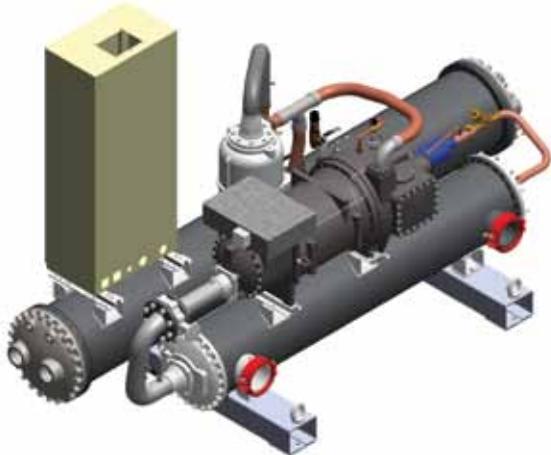

EWWD-EJYNN/A



pCO²

STRENGTHS

- High efficiency
- All models are PED pressure vessel approved
- Stepless single-screw compressor
- Optimised for use with R-134a
- Cooling range: 362-1,134 kW
- EER range: 4.72-5.12
- 1 or 2 truly independent refrigerant circuits
- Standard electronic expansion valve
- DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops

HEATING ONLY AND COOLING ONLY

		360	440	500	600	750	800	850	950	C10	C11	C12				
Capacity	Cooling	kW	362	433	506	573	720	795	866	933	976	1,038	1,134			
Power input	Cooling	kW	70.68	85.32	100.09	120.35	141.56	155.84	170.45	184.75	199.04	219.92	239.92			
EER			5.12	5.08	5.06	4.76	5.09	5.1	5.08	5.05	4.9	4.72	4.73			
Dimensions	(Height x Width x Depth)	mm	1,983 x 1,430 x 3,533				2,245 x 1,350 x 4,769									
Weight	Machine weight	kg	2,640	2,745	2,772		5,056	5,121	5,205	5,219	5,233	5,268				
	Operating weight	kg	5,051	5,203		5,244	9,543	9,623	9,730	9,754	9,779	9,826				
Water Heat Exchanger Evaporator	Type		Shell and tube													
	Water volume	l	1,127	1,350	1,582	1,801	948	1,052	1,146	1,240	1,301	1,382	1,515			
	Water flow rate	Min l/min	191.1	229	268.2	305.3	389.8	432.6	471	509.7	534.9	567.9	622.8			
		Nominal l/min	1,036.6	1,241.5	1,451.2	1,642.6	2,063.2	2,278.4	2,483.4	2,676	2,797.6	2,975.2	3,249.8			
		Max l/min	2,280.1	2,720.9	3,170.1	3,559.6	4,479.1	4,925.7	5,368.3	5,762.2	6,003.3	6,395.9	6,960.6			
	Nominal water pressure drop	Cooling kPa	64	48	54	68	58	68	56	64	72	46	52			
Water Heat Exchanger Condenser	Type		Shell and tube													
	Water volume	l	1,923	2,262	2,653	2,938	1,604	1,758	1,901	2,060	2,187	2,295	2,457			
	Water flow rate	Min l/min	326.1	384.2	450	497.7	659.3	722.5	781.4	846.9	898.8	943.5	1,010			
		Nominal l/min	1,239.2	1,486.1	1,738.1	1,987.6	1,234.8	1,498.8	1,485	1,708.8	1,684.2	1,987.2	1,969.2			
		Max l/min	2,034.8	2,432.7	2,836.1	3,206.3	3,996.8	4,396.3	4,797.9	5,150.9	5,384.9	5,766.7	6,270.7			
	Nominal water pressure drop	Cooling kPa	47.67	47.19	51.37	66.03		48.07	46.92		49.83	64.97				
Compressor	Type		Screw compressor													
	Model	Quantity	1				2									
Sound power	Cooling	dBA	93.6	94.6	96.6		96.9	97.3	97.8	98.9	99.8	98.3	98.6			
	Evaporator	Min~Max °C	-8 (OPZL) ~15													
Refrigerant circuit	Condenser	Min~Max °C	15~55													
	Refrigerant type		R-134a													
	Refrigerant charge	kg	54		52		108	106		104						
	No of circuits		1				2									
Refrigerant control			Electronic expansion valve													
Power Supply			3~/400V/50Hz													
Piping connections	Evaporator water inlet / outlet	mm	168.30				219.10									
	Condenser water inlet / outlet		4"													

EWWD-BJYNN

Water Cooled



EWWD-BJYNN



pCO²

STRENGTHS

- All models are PED pressure vessel approved
- 1 and 2 stepless single-screw compressors
- Optimised for use with R-134a
- Cooling range: 369–1050kW
- Super high efficiency: EER up to 5.83
- Very high EER values at part loads condition
- Flooded evaporator
- Expansion valve with liquid level control

STANDARD AVAILABLE

- Main switch
- Gauges
- Electronic expansion valve

OPTIONS (factory mounted)

- Glycol application
- Suction stop valve
- A/V meter
- Soft starter
- Cu/ni heat exchanger

ACCESSORIES

- Communication cards (EKAC200J – EKACLON)
- Bacnet gateway (EKBMSBNJ)
- Remote user interface (EKRUPCK)
- Buffer tanks (EKBT500N - EKBT500C - EKBTC500C)
- Sequencing panel (EKCSCII)
- Plant visor (EKPV2J)
- Modem (EKMODEM – EKGSMOD)
- Converter RS485 to RS 232 (EKCON)

COOLING ONLY			380	460	550	750	850	900	C10	C11	
Capacity	Cooling	kW	369	445	521	734	816	895	976	1050	
Nominal input	Cooling	kW	65	77.9	90	129	142	155	167	180	
EER			5.68	5.71	5.79	5.69	5.75	5.77	5.84	5.83	
Capacity Steps	%		stepless 25-100			stepless 12.5-100					
Dimensions	(Height x Width x Depth)	mm	2250x3625x1551	2250x3860x1551		2300x4145x1743	2300x4145x1808	2300x4145x1910			
Unit		kg	3089	3370	3603	5546	5636	6007	6448	6598	
Operating Weight		kg	3250	3588	3870	5911	6045	6460	6972	7163	
Water Heat Exchanger	Type		Flooded shell and tube								
	Minimum water volume in the system	l	83	111	133	181	199	243		263	
	Water flow rate	Min l/min	665	948	1086	1478	1703	1904	1924	2146	
		Nominal l/min	1244	1499	1752	2474	2746	3010	3277	3526	
		Max l/min	2103	2998	3435	4675	5386	6020	6085	6786	
Sound Power	Cooling	dBA	78	79	80	81	81.5	82	82.5	83	
Compressor	Type		Semi-hermetic single screw compressor								
	Model	Quantity	1			2					
Refrigerant circuit	Refrigerant type		R-134a								
	Refrigerant charge	kg	130	165	180	200	215	230	274	290	
	No of circuits		1								
	Refrigerant control		Electronic expansion valve								
Power Supply			3~/400V/50Hz								
Piping connections	Evaporator water inlet/outlet		1/2" gas								

EWWQ-AJYNN

Water Cooled –
Standard Efficiency



EWWQ400AJYNN



pCO²

STRENGTHS

- All models are PED pressure vessel approved
- Cooling range: 388-2,093kW
- EER range up to 4.62
- ESEER up to 5.37
- 1 or 2 stepless single-screw compressors
- 1 or 2 truly independent refrigerant circuits
- Shell and tube heat exchanger
- Optimised for use with R-410A
- Standard electronic expansion valve
- Compact design
- Partial heat recovery available

COOLING ONLY																						
			400	480	600	650	750	800	850	900	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19	C20	
Capacity (Eurovent)	Cooling	kW	387.96	474.13	574.36	651.45	742.14	812.53	880.09	891.19	980.45	1,028.15	1,077.43	1,210.09	1,281.09	1,352.09	1,488.14	1,620.34	1,783.43	1,928.13	2,092.73	
Nominal input (Eurovent)	Cooling	kW	87.37	106.27	130.44	147.86	169.73	175.22	206.4	194.02	212.97	245.47	236.90	261.72	279.05	296.39	339.95	375.37	408.72	441.58	475.47	
Capacity Steps	% / 25-100 (stepless)			12.5-100 (stepless)			25-100 (stepless)			12.5-100 (stepless)			25-100 (stepless)			12.5-100 (stepless)			12.5-100 (stepless)			
EER	4.44	4.46	4.4	4.41	4.37	4.64	4.26	4.59	4.6	4.19	4.55	4.62	4.59	4.56	4.38	4.32	4.36	4.37	4.40			
ESEER	4.95	4.98	4.97	4.72	5.37	4.60	5.36	5.34	4.53	5.33	5.36	5.35	5.29	4.93	4.82	4.89	4.87					
Dimensions	(Height x Width x Depth)	mm	1,846x1,065x3,431	2,000x1,226x3,440	1,861x1,266x3,51	2,170x1,350x4,902	1,861x1,266x3,51	2,170x1,350x4,902	1,861x1,266x3,51	2,170x1,350x4,902	1,861x1,266x3,51	2,170x1,350x4,902	2,455x1,350x4,835	2,547x1,350x4,844	2,547x1,350x4,809							
Weight	Machine weight	kg	1,933	1,967	2,283	2,332	2,407	3,921	2,427	3,949	3,988	2,457	4,344	4,529	4,536	4,607	4,988	4,999	5,053	5,204	5,289	
	Operating weight	kg	2,135	2,169	2,543	2,628	2,777	4,422	2,795	4,463	4,496	2,812	4,780	5,186	5,200	5,280	5,602	5,615	5,670	5,881	5,970	
Water Heat Exchanger Evaporator	Type		Shell and tube																			
	Water volume	l	124	118	176	170	274	344	266	344	325	251	325	538			505	495	539	527		
	Water flow rate	Min l/min	664	812	986	1,118	1,225	1,385	1,279	1,522	1,673	1,283	1,845	2,062	2,188	2,314	2,391	2,501	2,925	3,267	3,667	
		Max l/min	1,258	1,354	1,860	2,108	2,415	2,649	2,859	2,898	3,189	3,342	3,492	3,937	4,160	4,383	4,840	5,255	5,785	6,238	6,768	
	Nominal water pressure drop	Cooling kPa	49.43	64.65	45.04	47.92	54.74	53.80	50.22	63.54	59.07	57.23	70.01	45.37	50.28	55.40	59.86	69.74	89.42	98.78	122.57	
Water Heat Exchanger Condenser	Type		Shell and tube																			
	Water volume	l	79	92	84	162	97	79	102	79	92	104	52	60	60	68	54	54	61	61	77	
	Water volume	l	-	-	-	-	-	-	-	92	-	-	60	68			54	57	61	77		
	Water flow rate	Min l/min	813	994	1,210	1,371	1,506	1,683	1,579	1,854	2,037	1,589	2,251	2,508	2,664	2,821	2,937	3,080	3,595	4,015	4,500	
		Max l/min	1,541	1,878	2,282	2,587	2,968	3,220	3,530	3,882	4,139	4,260	4,789	5,066	5,345	5,945	6,472	7,112	7,666	8,307		
	Nominal water pressure drop	Cooling kPa	60.15	64.35	67.91	66.02	16.46	64.44	20.43	66.55	67.64	25.92	70.09	73.40	69.77	16.52	19.31	16.93	17.08	15.02		
Compressor	Type		Semi hermetic single screw compressor																			
	Model	Quantity	1																			
Sound Power	Cooling	dBA	100.2	101.2	102.3	101.5	104.7	102.3	104.7	105.1	103.2	104.7	105.2	106.5	105.8	106.2	106.6	107.1	107.5			
Operation Range	Evaporator	Min~Max °C	-4~10																			
	Condenser	Min~Max °C	25~45																			
Refrigerant circuit	Refrigerant type		R-410A																			
	Refrigerant charge	kg	80	90	100	85+85	100	85+85	100	95+95	100+100											130+130
	No of circuits		1	2	1	2	1	2	1													2
	Refrigerant control		Electronic expansion valve																			
Power Supply			3~/400V/50Hz																			
Piping connections	Evaporator water inlet/outlet		168.30																			273.00
	Condenser water inlet/outlet		5"	5"	5"	6"	5"	6"	5"	6"	5"	6"	5"	6"	5"	6"	5"	6"	5"	6"		

EWWQ-AJYNN/A

Water Cooled –
High Efficiency



EWWC22AJYNN/A



pCO²

STRENGTHS

- All models are PED pressure vessel approved
- Cooling range: 431-2,196kW
- EER range up to 5.09
- ESEER up to 5.98
- 1 or 2 stepless single-screw compressors
- 1 or 2 truly independent refrigerant circuits
- Shell and tube heat exchanger
- Optimised for use with R-410A
- Standard electronic expansion valve
- Compact design
- Partial heat recovery available

COOLING ONLY																							
			440	550	650	750	800	950	C10	C11	C12	C13	C14	C15	C16	C18	C19	C20	C22				
Capacity (Eurovent)	Cooling		kW	431	527	653	740	818	993	1,059	1,139	1,182	1,297	1,397	1,479	1,605	1,769	1,901	2,061	2,196			
Nominal input (Eurovent)	Cooling		kW	86.67	104.72	128.28	145.95	162.04	196.57	209.49	232.06	233.11	257.54	274.77	291.86	321.48	356.36	390.31	425.94	460.72			
Capacity Steps			%	25-100 (stepless)						12.5-100 (stepless)						25-100 (stepless)							
EER				4.97	5.03	5.09	5.07	5.05		5.06	4.91	5.07	5.04	5.08	5.07	4.99	4.96	4.87	4.84	4.77			
ESEER				5.58	5.61	5.69	5.67	5.64	5.39	5.89	5.28	5.87	5.88	5.98	5.93	5.67	5.71	5.48	5.50	5.38			
Dimensions	(Height x Width x Depth)		mm	2,000x1,211x3,987						2,001x2183,855						2,453x1,350x4,985							
Weight	Machine weight		kg	2,322	2,403	2,738	2,407	2,427	4,775	2,457	4,831	4,873	4,919	4,969		5,117	5,388	5,408	5,414				
	Operating weight		kg	2,594	2,685	2,745	3,158	2,815	3,056	5,431	3,086	5,479	5,512	5,546	5,606	5,794	5,843	6,110	6,118	6,124			
Water Heat Exchanger Evaporator	Type			Shell and tube																			
	Water volume		l	220	213	200	334	325	538	587	538	575	563	551	495	484	535	527					
	Water flow rate		l/min	733	898	1,114	1,262	1,438	1,733	1,805	1,994	2,016	2,213	2,383	2,523	2,811	3,097	3,334	3,617	3,862			
	Max		l/min	1,407	1,718	2,133	2,419	2,651	3,234	3,462	3,695	3,862	4,237	4,563	4,823	5,219	5,749	6,158	6,671	7,094			
	Nominal water pressure drop		Cooling	kPa	55.77	68.81	71.54	64.27	57.46	53.85	53.69	68.89	64.23	55.13	67.85	75.14	70.1	89.12	91.3	113.04	126.77		
Water Heat Exchanger Condenser	Type			Shell and tube																			
	Water volume		l	52	69	81	86	83	91	69	91	73	76	75	86	91	91	91	91	91			
	Water volume		l							70	-	76		86									
	Water flow rate		l/min	881	1,076	1,332	1,511	1,723	2,076	2,162	2,400	2,414	2,652	2,852	3,021	3,374	3,721	4,019	4,365	4,672			
	Max		l/min	1,691	2,552	2,896	3,176	3,875	4,147	4,447	4,624	5,077	5,461	5,774	6,264	6,908	7,422	8,049	8,581				
	Nominal water pressure drop		Cooling	kPa	50.16	39.75	42.38	46.94	59.79	64.73	40.10	83.56	47.93	48.17	49.20	46.82	44.26	61.21	60.50	79.00			
Compressor	Type			Semi-hermetic single screw compressor																			
	Model		Quantity	1						2						2							
Sound Power	Cooling		dBA	100.9	101.7	102.6	102.7	102.0	102.9	105.2	103.8	105.6	106.1	106.5	105.8	106.2	106.6	107.1	107.5				
Operation Range	Evaporator		Min~Max	°C	-4~10																		
	Condenser		Min~Max	°C	25~45																		
Refrigerant circuit	Refrigerant type			R-410A																			
	Refrigerant charge		kg	95		110	130	120+120	130	120+120						130+130							
	No of circuits			1		2	1			Electronic expansion valve													
Power Supply	3~/400V/50Hz																						
Piping connections	Evaporator water inlet/outlet			219.10						273.00						5"							
	Condenser water inlet/outlet			5"						5"													



EWLP-KAW1N

Remote Condenser



EWLP014KAW1N



MICRO CHILLER

STRENGTHS

- One of the most compact units in the market (60cm x 60cm x 60cm for models 012 to 030).
- Daikin scroll compressor.
- Standard main isolator switch.
- Basic hydraulic components : included as a kit with the unit: flow switch, air purge, filter + shut-off valves.
- Standard reverse phase protection.

OPTIONS (factory mounted)

- Chilled water temperature down to - 5°C (ZH) or -10°C (ZL).

ACCESSORIES (kit)

- Compressor soundproof material (-3dBA).
- Hydraulic module (see page 28).
- BMS gateway (MODBUS/J-BUS / BACNET protocol).
- Remote user interface.

CONTROL

- Microprocessor control.
- Water inlet temperature control.

AVAILABLE INPUTS/OUTPUTS

Input

- Remote ON / OFF.
- Pump contact.

Output

- Compressor operation.
- Summary alarm.
- Pump relay contact.

COOLING ONLY

		012	020	026	030	040	055	065
Capacity	Cooling	kW	12.1	20.0	26.8	31.2	40.0	53.7
Nominal input	Cooling	kW	4.2	6.6	8.5	10.1	13.4	17.8
EER			2.88	3.03	3.15	3.09	2.99	3.02
Capacity Steps	%		1				2	
Dimensions	(Height x Width x Depth)	mm		600x600x600			600x600x1200	
Unit		kg	108	141	147	151	252	265
Water Heat Exchanger	Type				Brased plate			
	Minimum water volume in the system	l	62	103	134	155	205	268
	Water flow rate	l/min	17	29	38	45	57	77
	Min	l/min	35	57	77	89	115	154
	Nominal	l/min	69	115	153	179	229	307
	Max	l/min						358
Sound Power	Cooling	dBA		64		71	67	74
Compressor	Type				Hermetically sealed scroll compressor			
	Model	Quantity		1			2	
Refrigerant circuit	Refrigerant type				R-407C			
	No of circuits			1			2	
	Refrigerant control				Thermostatic expansion valve			
Power Supply					3N~/400V/50Hz			
Piping connections	Evaporator water inlet/outlet			fbsp 25field installation			fbsp 40field installation	
	Liquid line connection		9.52 flare		12.7 flare		2x12.7 flare	
	Discharge line connection		12.7 flare		19.1 flare		2x19.1 flare	

EWLD-MBYN

Remote Condenser



EWLD120MBYN



pCO²

STRENGTHS

- DAIKIN stepless single screw compressor.
- Compact and modular design.
- Standard phase sequence controller.
- VICTAULIC joints.
- DICN operation as standard within same series.
- Standard discharge shut-off valve.
- Standard flow switch.
- Standard filter.

OPTIONS (factory mounted)

- Main isolator switch.
- Low noise (-6dB(A)).
- Compressor suction stop valve.
- Ampere and Voltmeter (read-out on switchbox).
- Chilled water temperature down to - 5°C (ZH) or -10°C (ZL).
- Dual pressure relief valve.

ACCESSORIES (kit)

- BMS gateway (MODBUS/J-BUS / BACNET protocol).
- Remote user interface.

CONTROL

- Microprocessor control.
- Water inlet or outlet temperature control.
- Weekly operating schedule.

AVAILABLE INPUTS/OUTPUTS

Input

- ON / OFF.
- Pump contact.
- Dual setpoint through analog signal.
- Floating set point.

Output

- Compressor operation.
- Summary alarm.
- Fan-condenser relay contacts.
- Pump relay contact.

COOLING ONLY

		120	170	240	260	340	400	480	500	540
Capacity	Cooling	kW	116.00	170.00	235.00	265.00	340.00	405.00	470.00	500.00
Nominal input	Cooling	kW	32.00	49.80	66.50	77.90	99.60	116.00	133.00	144.00
EER			3.63	3.41	3.53	3.4	3.41	3.49	3.53	3.47
Capacity Steps	%		30-100 stepless				15-100 stepless			
Dimensions	(Height x Width x Depth)	mm	1018x2681(3051)x930	1018x2681 (3254)x930			2000x2681 (3254)x930			
Unit		kg	891	1110	1342	1428	2220	2452	2684	2770
Operating Weight		kg	907	1130	1369	1462	2260	2497	2738	2831
Water Heat Exchanger	Type		Brased plate, one per circuit							
	Minimum water volume in the system	l	570	830	1150	1300	830	990	1150	1220
	Water flow rate	l/min	175	265	350	400	525	625	700	750
	Nominal	l/min	333	487	674	760	975	1161	1347	1520
	Max	l/min	700	1070	1400	1600	2100	2500	2800	3000
Sound Power	Cooling	dBA	87	93	94	93			96	
Compressor	Type		Semi-hermetic single screw compressor							
	Model	Quantity		1		2	1	2	1	2
Refrigerant circuit	Refrigerant type				R-134a					
	No of circuits			1					2	
	Refrigerant control			Thermostatic expansion valve	Electronic expansion valve	Thermostatic expansion valve		Electronic expansion valve		
Power Supply				3~/400V/50Hz						
Piping connections	Evaporator water inlet/outlet		3" odvc field installation	3" victaulic coupling field installation						
	Liquid line connection		7/8"	1" 1/8	1" 3/8	2x1" 1/8"	1" 1/8 + 1" 3/8		2x1" 3/8	
	Discharge line connection			2" 1/8	2" 5/8		2x(2" 1/8)		2" 1/8 + 2" 5/8	2x(2" 5/8)

EWLD-DJYNN

Water Cooled –
Condenserless Chiller



EWWWD260DJYNN



pCO²


STRENGTHS

- Cooling range: 161 - 526 kW
- 1-2 truly independent refrigerant circuits
- Optimised for use with R-134a
- Stepless single-screw compressor
- All models are PED pressure vessel approved
- DX shell and tube evaporator – one pass refrigerant side for easy oil circulation and return
- Electronic expansion device as standard

COOLING ONLY																				
			160	190	240	270	320	360	400	420	480	550								
Capacity (Eurovent)	Cooling	kW	160.6	189	244	270.4	315.5	352.2	381.1	428.3	475.7	525.9								
Nominal input (Eurovent)	Cooling	kW	45.4	54.3	65.9	74.6	90.6	99.7	108.6	120	131.5	148								
Capacity Steps	%		25-100 (stepless)			12.5-100 (stepless)														
EER			3.54	3.48	3.7	3.62	3.48	3.53	3.51	3.57	3.62	3.55								
Dimensions	(Height x Width x Depth)	mm	1,860x1,000x3,700			1,942x1,100x4,400														
Weight	Machine weight	kg	1,280		1,398		2,442	2,446	2,501	2,506										
	Operating weight	kg	1,337		1,516		2,560		2,670											
Water Heat Exchanger	Type		Shell and tube - direct expansion																	
Evaporator	Water volume	l	1,151	1,354	1,749	1,938	1,130	1,262	1,365	1,535	1,704	1,884								
	Water flow rate	Min	l/min	230.20	270.90	349.74	387.58	452.22	504.83	546.25	613.90	681.84	753.80							
		Nominal	l/min	460.39	541.81	699.47	775.16	904.44	1,009.65	1,092.50	1,227.81	1,363.69	1,507.60							
		Max	l/min	649.15	763.95	986.26	1,092.97	1,275.27	1,423.61	1,540.42	1,731.21	1,922.80	2,125.71							
	Nominal water pressure drop	Cooling	kPa	48	69	43	53	64	63	72	54	68								
Compressor	Type		Semi-hermetic single screw compressor																	
	Model	Quantity	1			2														
Sound Power	Cooling	dBA	88			90.5														
Operation Range	Evaporator	Min-Max	°C	-8 ~ 15																
	Condensing temperature	Min~Max	°C	25 ~ 50																
Refrigerant circuit	Refrigerant type			R-134a																
	Refrigerant charge	kg		5			10			2										
	No of circuits			1																
	Refrigerant control			Electronic expansion valve																
Power Supply				3~/400V/50Hz																
Piping connections	Evaporator water inlet/outlet		88.9			114.3				139.7										

EWLD-EJYNN

Condenserless Chiller

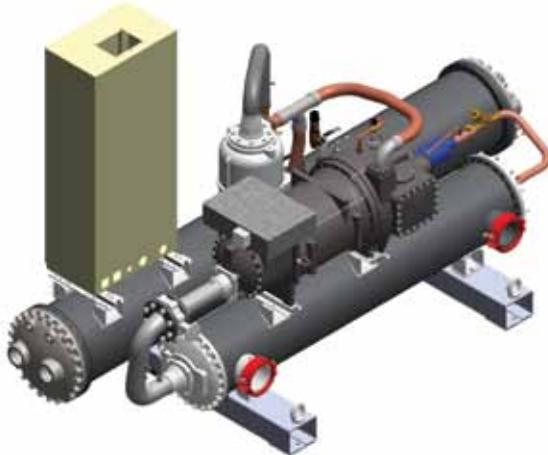

EWLD-EJYNN




pCO²

STRENGTHS

- Cooling range: 328-1,422 kW
- EER range: 3.51-3.91
- Stepless single-screw compressor
- Optimised for use with R-134a
- 1 or 2 truly independent refrigerant circuits
- Standard electronic expansion valve
- DX shell and tube evaporator – one pass refrigerant side for easy oil circulation and return
- All models are PED pressure vessel approved

COOLING ONLY																																							
			320	400	420	500	600	650	750	800	850	900	950	C10	C11	C12	C13	C14	C15	C16	C17																		
Capacity	Cooling	kW	328	391	428	504	596	657	730	788	850	919	966	1,003	1,078	1,125	1,188	1,267	1,319	1,370	1,422																		
Power input	Cooling	kW	83.8	100	116	137	165	181	198	214	231	252	271	279	296	312	329	347	366	386	405																		
EER			3.91	3.69	3.68	3.61	3.63	3.69	3.68	3.65	3.56	3.59	3.64	3.60	3.61	3.65	3.60	3.55	3.51																				
Dimensions	(Height x Width x Depth)	mm	1,921 x 1,461 x 3,338						2,113 x 1,350 x 4,332						2,398 x 2,153 x 4,470																								
Weight	Machine weight	kg	1,861	1,869	1,884	3,331	3,339	3,347	3,356	3,364	3,412	5,146	5,167	5,188	5,208																								
	Operating weight	kg	2,054	2,052	2,056	3,602	3,603	3,604	3,605	3,645	5,667	5,671	5,677	5,680																									
Water Heat Exchanger	Type		Shell and tube																																				
Evaporator	Water flow rate	Nominal l/min	939	1,119.8	1,227.6	1,445.6	1,709.6	1,884.1	2,093	2,258.3	2,436.5	2,634	2,768.2	2,874.6	3,090.3	3,223.9	3,407	3,631.7	3,780.2	3,928.8	4,077.4																		
	Nominal water pressure drop	Cooling kPa	33.7	46.27	47.28	54.12	48.57	38.96	51.57	47.15	46.98	58.35	45.07	52.23	45.67	49.28	41.21	50.8	54.6	58.53	62.57																		
Compressor	Type		Screw compressor																																				
	Model	Quantity	1			2			3																														
Sound Power	Cooling	dBA	93.6	94.6	96.6	96.9	97.3	97.8	98.8	99.8	98.3	98.6	99.8	100.6	101.2	101.8																							
Operation Range	Evaporator	Min-Max °CDB	-8 (OPZL) ~ 15																																				
	Condensing temperature	Min~Max °CDB	-																																				
Refrigerant circuit	Refrigerant type		R-134a																																				
	Refrigerant charge	kg	5																																				
	No of circuits		1	2			3																																
	Refrigerant control		Electronic expansion valve																																				
Power Supply			3~/400V/50Hz																																				
Piping connections	Evaporator water inlet/outlet	mm	168.30																																				
			219.10																																				

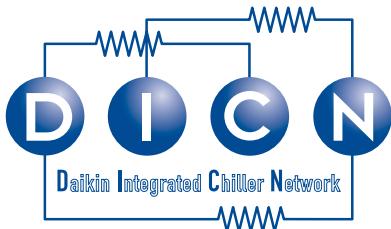


D.I.C.N.

Daikin Integrated Chiller Network

Applicable Series:

- EWAQ080-260DAYN (R-410A)
- EWYQ080-250DAYN (R-410A)
- EWWD120-540MBYN (R-134a)
- EWLD120-540MBYN (R-134a)

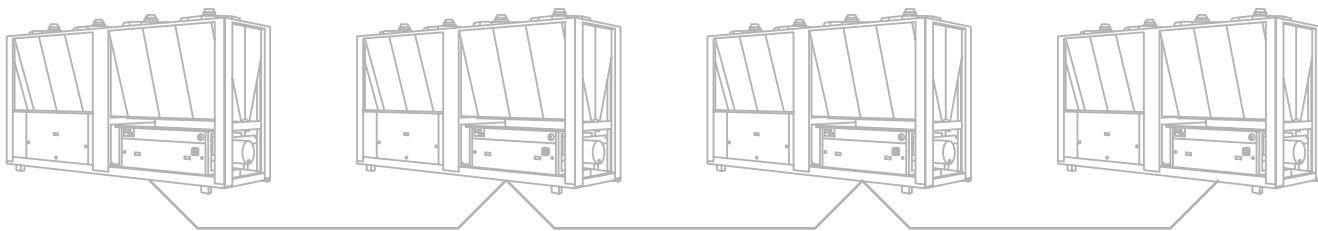

Daikin chillers can be equipped with DICN which allows the simultaneous operation of up to 4 chillers on the MB range and up to 5 chillers on the DA range as if they were a single unit, in order to deliver the required cooling capacity. This results in precise and efficient capacity control and is also useful for back up purposes, ensuring that the necessary amount of cooling is available and guaranteeing reliable operation of the chiller plant.

This function enables a Daikin 2MW chiller plant to be operated via a single controller.

Please note that DICN is only possible within the same series.


Hydraulic Module



EHMC10-15-30AV1010

STRENGTHS

- 100l buffer tank.
- Freeze-up protection (heater tape).
- Single pump.
- 12l expansion vessel.
- Standard dual pressure ports.

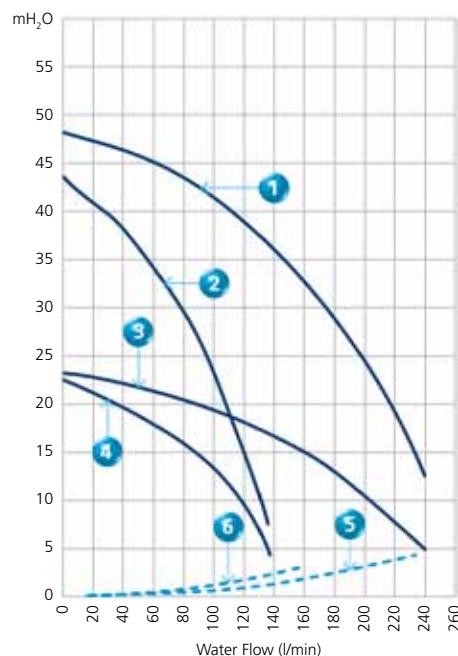

Pump characteristics

- 1 - EHMC30AV1080
 2 - EHMC10AV1080 & EHMC15AV1080
 3 - EHMC30AV1010
 4 - EHMC10AV1010 & EHMC15AV1010

Hydraulic module + filter pressures losses

- 5 - EHMC15/30AV1010 & EHMC15/30AV1080
 6 - EHMC10AV1010 & EHMC10AV1080

HYDRAULIC MODULE							
		10		15		30	
		1010	1080	1010	1080	1010	1080
Nominal flow	l/min	62		88		187	
Nominal static height	mH ₂ O	17	34	15	27	10	27
Nominal input	W	630	1,050	650	1,070	1,070	2,090
Dimensions (HxWxD)	mm	1,284x635x688		1,284x635x688		1,284x635x688	
Machine weight	kg	99	101	102	104	105	111
Sound power	dBA	63		63		63	
Sonid pressure	dBA	52		52		52	
Power supply	V/Hz	230V/1~/50Hz					
Operation range	Water side	°CDB					
	Air side	°CDB					
Piping connections	Evaporator water inlet/outlet	1" BSPF		2" BSPF		2-1/2" BSPF	
	Drain connection	1/2"					

Fan Coil Units

FWB	232
FWD	233
FWV	233
FWM	233
FWL	233
FWT	234
FWC	234
FWF	234

Fan coil units



- 8 models, of which 3 in flexible application
- available in 2-pipe and 4-pipe
- fashionable design
- wide range of options
- to be combined with water chiller or boiler
- washable air filter



FWB-AT Concealed Ceiling



FWD-AA Flexi Type



FWV-CA Floor Standing



FWL-CA Flexi Type



FWM-CA Flexi Type



FWT-AT Wall Mounted



FWF-AT Ceiling Mounted Cassette (600x600mm)



FWC-A Ceiling Mounted Cassette

FWB02-10AT			02	03	04	05	06	07	08	09	10	
2-pipes	COOLING	Total Capacity (H)	kW	2.61	3.14	3.49	5.08	5.45	6.47	7.57	8.67	10.34
		Sensible Capacity (H)	kW	1.88	2.16	2.34	3.6	3.87	4.40	5.23	5.96	6.90
		Water Flow	l/h	448	539	598	873	936	1111	1299	1488	1774
		Pressure Drop	kPa	8	14	11	15	8	14	21	21	26
	HEATING	Total Capacity (H)	kW	5.47	6.01	6.47	10.31	11.39	12.28	15.05	16.85	18.78
		Water Flow	l/h	480	527	567	904	999	1077	1319	1479	1647
		Pressure Drop	kPa	7	10	8	12	7	10	16	15	18
	Power Input	H	W		106			192			294	
	Water Volume	(Std. Heat Exchanger)	l	1.1	1.5	2.2	1.6	2.1	3.2	2.1	2.8	4.2
4-pipes	Fan	Air Flow Rate (H/M/L)	m ³ /h	400/300/180			800/600/300			1200/800/600		
		Available Pressure (H)	Pa	71			65			59		
		Speed	no.	7 speeds (high = 7, medium = 4, low = 1)								
		Sound Power Level	H/M/L	dBA 58/46/36			dBA 60/52/37			dBA 69/58/53		
		Sound Pressure Level	H/M/L	dBA 46.5/34.5/24.5			dBA 48.5/40.5/25.5			dBA 57.5/46.5/41.5		
	HEATING*	Dimensions	mm	239x1039x609			239x1389x609			239x1739x609		
		Weight	Kg	23	24	26	31	33	35	43	45	48
		Current Input	A	0.51			0.94			1.28		
		Power Supply	V~/Hz				230/1/50					
		Water Connections	(Std. Heat Exchanger)	inch.			3/4					
Electronical Remote Controller + Water Probe	HEATING*	Total Capacity (H)	kW	3.14			5.99			12.8		
		Water Flow Add. Heat Exchanger	l/h	275			526			1123		
		Pressure Drop Add. Heat Exchanger	kPa	3			5			8		
		Water Volume Add. Heat Exchanger	l	0.4			0.6			1.7		
		Water Connections Add. Heat Exchanger	inch.				3/4			1		
									ECFWER6			

* Heating module available as option

FWD04-18AA*			04	06	08	10	12	16	18	
2-pipe (*=TN)	COOLING	Total capacity	kW	3.90	6.20	7.80	8.82	11.90	16.4	18.3
		Sensible capacity	kW	3.08	4.65	6.52	7.16	9.36	12.8	14.1
		Water flow (H)	l/h	674	1,064	1,339	1,514	2,056	2,833	3,140
		Pressure drop (H)	kPa	17	24	24	16	26	34	45
4-pipe (*=FN)	HEATING	Heating capacity	kW	4.05	7.71	9.43	10.79	14.45	19.81	21.92
		Water flow (H)	l/h	674	1,064	1,339	1,514	2,056	2,833	3,140
		Pressure drop (H)	kPa	14	20	20	13	21	28	37
	Available static pressure		Pa	66	58	68	64	97	145	134
2-pipe / 4-pipe	COOLING	Weight	kg	33	41	47	49	65	77	80
		Total capacity	kW	3.90	6.20	7.80	8.82	11.90	16.4	18.3
		Sensible capacity	kW	3.08	4.65	6.52	7.16	9.36	12.8	14.1
		Water flow (H)	l/h	674	1,064	1,339	1,514	2,056	2,833	3,140
4-pipe	HEATING	Heating capacity	kW	4.49	6.62	9.21	9.21	15.86	21.15	21.15
		Water flow (H)	l/h	349	581	808	808	1,392	1,856	1,856
		Pressure drop (H)	kPa	9	15	13	13	12	16	16
	Available static pressure		Pa	63	53	63	59	92	138	128
2-pipe / 4-pipe	Weight	kg	35	43	50	52	71	83	86	
		Air flow rate	m³/h	800	1,250	1,600	1,600	2,200	3,000	3,000
		Power input	W	234	349	443	443	714	1,197	1,197
		Water connections	inch	3/4	3/4	3/4	3/4	1	1	1
2-pipe	Max. absorbed current	A	0.95	1.58	1.97	1.97	3.21	5.37	5.37	
		Dimensions (HxWxD)	mm	280x754x559	280x964x559	280x1,174x559	352x1,174x718	352x1,384x718		
		Sound power level	dBA	66	69	72	72	74	78	78
		Power supply	V / ~ / Hz			230/1/50				
Electronical Remote Controller + Water Probe			FWW/FWL/FWM	ECFWDER6						

FWV/FWL/FWM01-10CA**			01	02	03	04	06	08	10	
2-pipe (*=TN or TV)	COOLING	Total capacity (H)	kW	1.54	2.09	2.93	4.33	4.77	6.71	8.02
		Sensible capacity (H)	kW	1.20	1.51	2.11	3.15	3.65	4.91	5.96
		Water flow	l/h	265	359	504	745	820	1,154	1,343
		Pressure drop	kPa	13	13	11	12	14	12	19
4-pipe(*=FN or FV)	HEATING	Total capacity (H)	kW	2.14	2.57	3.81	5.63	6.36	7.83	10.03
		Water flow	l/h	265	359	504	745	820	1,154	1,343
		Pressure drop	kPa	9	10	9	9	10	9	16
		Power input	H	W	37	53	56	98	98	182
4-pipe	Water volume	l	0.5	0.7	1	1.4	1.4	2.1	2.1	
		Air flow	H/M/L	m³/h	319/233/178	344/271/211	442/341/241	706/497/361	785/605/470	1,011/771/570
		Sound power level	H/M/L	dBA	45/39/33	50/44/38	47/41/33	52/43/35	56/49/43	61/54/47
		Weight	FWV	kg	19	20	25	30	31	41
2-pipe / 4-pipe	COOLING	FWM	kg	14	15	19	23	23	32	32
		FWL	kg	20	21	27	32	33	44	44
		Total capacity (H)	kW	1.46	1.90	2.87	4.33	4.67	6.64	7.88
		Sensible capacity (H)	kW	1.14	1.51	2.07	3.15	3.57	4.85	5.85
4-pipe(*=FN or FV)	HEATING	Water flow	l/h	251	327	494	745	803	1,142	1,355
		Pressure drop	kPa	13	13	11	12	14	12	19
		Water volume	l	0.5	0.7	1	1.4	1.4	2.1	2.1
		Heating capacity (H)	kW	1.90	2.10	3.08	5.05	5.30	7.91	9.30
2-pipe	Water flow	l/h	196	182	286	396	465	694	816	
		Pressure drop	kPa	7	8	5	10	10	8	9
		Water volume	l	0.2	0.2	0.3	0.4	0.4	0.6	0.6
		Power input	H	W	37	53	56	98	98	182
4-pipe	Air flow	H/M/L	m³/h	307/225/174	327/261/205	431/332/238	690/490/356	763/593/460	998/765/565	1,362/1,007/636
		Sound power level	H/M/L	dBA	45/39/33	50/44/38	47/41/33	52/43/35	56/49/43	61/54/47
		Weight	FWV	kg	20	21	26	32	33	44
		FWM	kg	15	16	20	25	25	34	34
2-pipe / 4-pipe	FWL	kg	21	22	28	34	35	46	46	
		Water connections	inch	1/2"	1/2"	1/2"	1/2"	1/2"	3/4"	3/4"
		Max. absorbed current	A	0.17	0.24	0.25	0.44	0.43	0.80	1.12
		Dimensions	FWV/FWL (HxWxD)	mm	564x774x226	564x984x226	564x1,194x226		564x1,404x251	
2-pipe	FWM (HxWxD)	mm	535x584x224	535x794x224	535x1,004x224	535x1,214x249				
		Power supply	V / ~ / Hz			230/1/50				
		Electronical Remote Controller + Water Probe	FWW/FWL/FWM			ECFWER6				
Electronical Built-in Controller + Water Probe			FWW/FWL			ECFWEB6				

** = TN (2-pipe, without valves), TV (2-pipe, with valves), FN (4-pipe, without valves), FV (4-pipe, with valves).

FWT02-06AT			02	03	04	05	06	
2-pipes	COOLING	Total Capacity (H)	kW	2.34	2.78	3.22	4.54	5.28
		Sensible Capacity (H)	kW	1.74	2.03	2.35	3.65	4.33
		Water Flow	l/h	402	478	554	781	908
		Pressure Drop	kPa	48.3	64.7	69.3	50.3	69.3
	HEATING	Total Capacity (H)	kW	3.02	3.75	4.1	6.01	6.74
		Water Flow	l/h	402	478	554	781	908
		Pressure Drop	kPa	42.0	58.6	60.6	50.6	70.6
		Power Input	H	W	24.0	25.0	29.0	66.0
	Water Volume	(Std. Heat Exchanger)	l	0.49	0.57	0.57	0.85	0.85
	Fan	Air Flow Rate (H/M/L)	m³/h	467/382/297	510/425/340	586/484/374	1070/833/748	1121/985/799
	Speed	no.				3 speeds (High, Medium, Low)		
	Sound Power Level	H/M/L	dBA	53/48/44	53/47/43	55/49/44	61/57/55	64/61/59
	Sound Pressure Level	H/M/L	dBA	40/35/29	39/34/28	42/36/29	49/44/42	50/48/45
	Dimensions	HxWxD	mm	260x799x198	260x899x198		304x1062x222	
	Weight	Kg		10	12		16	
	Current Input	Max	A	0.11	0.11	0.13	0.29	0.3
	Power Supply		V~/Hz			220-240/1/50		
	Water Connections	(Std. Heat Exchanger)	inch.			1/2		
	Remote Control	Wired				MERCA		
		Infrared (Cooling Only / Heat Pump)				WRC COA/WRC HPA		

FWF02-04AT			02	03	04		
2-pipes	COOLING	Total Capacity (H)	kW	2.34	4.1	4.25	
		Sensible Capacity (H)	kW	1.97	3.06	3.24	
		Water Flow	l/h	402	705	731	
		Pressure Drop	kPa	67.3	68.6	68.8	
	HEATING	Total Capacity (H)	kW	3.22	5.12	5.42	
		Water Flow	l/h	402	705	731	
		Pressure Drop	kPa	61.9	70.5	71.2	
		Power Input	H	W	51.0	75.0	78.0
	Water Volume	(Std. Heat Exchanger)	l	0.56	1.15	1.15	
	Fan	Air Flow Rate (H/M/L)	m³/h	662/630/594	662/630/594	731/695/662	
	Speed	no.			3 speeds (High, Medium, Low)		
	Sound Power Level	H/M/L	dBA	54/53/51	53/52/50	56/55/53	
	Sound Pressure Level	H/M/L	dBA	44/43/42	44/42/41	47/46/44	
	Dimensions	HxWxD	mm		250x550x550		
	Weight	Kg		22	23		
	Current Input	Max	A	0.22	0.3	0.34	
	Power Supply		V~/Hz		220-240/1/50		
	Water Connections	(Std. Heat Exchanger)	inch.		3/4		
	Remote Control	Wired			MERCA		
		Infrared (Cooling Only / Heat Pump)			WRC COA/WRC HPA		

FWC07-12AT			07	08	10	11	12	
2-pipes	COOLING	Total Capacity (H)	kW	6.63	7.50	8.80	9.95	10.80
		Sensible Capacity (H)	kW	4.90	5.40	6.40	7.10	7.70
		Water Flow	l/h	1140	1290	1514	1711	1858
		Pressure Drop	kPa	24.8	30.8	41.6	52.2	69.3
	HEATING	Total Capacity (H)	kW	8.40	9.50	11.00	12.00	12.90
		Water Flow	l/h	1140	1290	1514	1711	1858
		Pressure Drop	kPa	21.4	26.8	35.3	45.2	64.1
		Power Input	H	W	127	151	164	192
	Water Volume	(Std. Heat Exchanger)	l			2.69		
	Fan	Air Flow Rate (H/M/L)	m³/h	1310/1130/1070	1380/1180/1070	1560/1320/1210	1740/1530/1340	1840/1680/1540
	Speed	no.				3 speeds (High, Medium, Low)		
	Sound Power Level	H/M/L	dBA	52/50/49	55/52/50	60/56/54	61/59/57	64/63/61
	Sound Pressure Level	H/M/L	dBA	42/39/37	45/42/40	49/45/43	51/48/46	53/52/50
	Dimensions	HxWxD	mm		335x820x821			
	Weight	Kg		31	32	35	38	40
	Current Input	Max	A	0.52	0.64	0.68	0.79	1.06
	Power Supply		V~/Hz			220-240/1/50		
	Water Connections	Std. Heat Exchanger	inch.			3/4		
	Remote Control	Wired				MERCA		
		Infrared (Cooling Only / Heat Pump)				WRC COA/WRC HPA		

FWC02-06AF			02	03	04	05	06	
4-pipes	COOLING	Total Capacity (H)	kW	3.81	3.96	4.63	5.01	5.16
		Sensible Capacity (H)	kW	3.4	3.52	4.07	4.4	4.54
		Water Flow	l/h	655	681	796	862	888
		Pressure Drop	kPa	3.56	3.78	4.94	5.70	5.96
	HEATING	Total Capacity (H)	kW	10.55	10.99	12.51	13.48	13.77
		Water Flow Heat Exchanger	l/h	907	945	1076	1159	1184
		Pressure Drop Heat Exchanger	kPa	4.80	5.50	7.20	8.60	8.90
		Power Input	H	W	122	138	153	184
	Water Volume	(Std. Heat Exchanger)	l			2.69		
	Fan	Air Flow Rate (H/M/L)	m³/h	1310/1130/1070	1380/1180/1070	1560/1320/1210	1740/1530/1340	1840/1680/1540
	Speed	no.				3 speeds (High, Medium, Low)		
	Sound Power Level	H/M/L	dBA	52/50/49	55/52/50	60/56/54	61/59/57	64/63/57
	Sound Pressure Level	H/M/L	dBA	42/39/37	45/42/40	49/45/43	51/48/46	53/52/50
	Dimensions	HxWxD	mm		335x820x821			
	Weight	Kg		31	32	35	38	40
	Current Input	Max	A	0.53	0.61	0.67	0.80	1.02
	Power Supply		V~/Hz			220-240/1/50		
	Water Connections	Std. Heat Exchanger	inch.			3/4		
		Additional Heat Exchanger	inch.			3/4		
	Remote Control	Wired				MERCA		
		Infrared (Cooling Only / Heat Pump)				WRC COA/WRC HPA		



Ururu Air Purifier

MCK75JVM-K



MCK75JVM-K

Humidification and airpurification in one

There are many substances in the air we breathe such as allergens, bacteria, virus and tobacco smoke, which can cause health to suffer. During the wintertime, dryness is especially a big issue.


The Daikin Ururu Air Purifier moisturises the air inside your home and relieves the effects of dry air. Just fill the 4 litre tank occasionally and it will humidify your room with a maximum volume of 600ml/h.

This useful and innovative function stems from the incorporation of a slim line water tank and combined water wheel and vaporisation filter assembly.

- Humidification thanks to the slim water tank
- Air purification

How does the humidification function work?

Water in the tank flows into the receiver tray housing the water wheel, which lifts the water as it rotates and releases it onto the filter. Air blown onto the filter, absorbs its moisture and discharges it into the room as humidification.

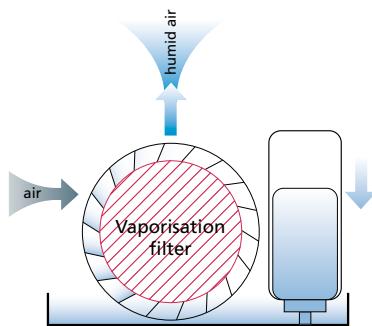

The Daikin Ururu Air Purifier also removes efficiently allergens (e.g. pollen, house dust mites, dust, etc.), bacteria and viruses. Additionally, it has a high deodorizing efficiency; it eliminates efficiently tobacco smoke whilst decomposing other smells. It quickly collects particles and breaks them down rapidly.

It has a low noise level making it ideal for use in bedrooms during the night. The unit includes a pleated filter, with 6 spares.

MCK75JVM-K		MCK75JVM-K			
Model					
Type		Humidifying air purifier			
Power supply		1~220-240/220-230V/50/60Hz			
Dimensions	HxWxD	590x395x268			
Colour		Black (Panel colour: silver)			
Weight	kg	11			
Dust collecting method		Plasma ionizer + Electrostatic dust collection filter			
Deodourising method		Flash Streamer + Titanium apatite photocatalytic filter + Deodourising catalyst			
Air filter		Polypropylene net with catechin			
Air purifying operation		Turbo	H	M	L
Power input	kW	0.081	0.035	0.018	0.011
Sound pressure level	dBA	50	43	36	26
Air flow rate	m³/h	450	330	240	150
Applicable room area	m²			46	60
Humidifying operation		Turbo	H	M	Silent
Power input	kW	0.084	0.037	0.020	0.013
Sound pressure level	dBA	50	43	36	23
Air flow rate	m³/h	450	330	240	150
Humidification	ml/h	600	470	370	290
Water tank capacity	l				4

Photocatalytic Air Purifier

MC707VM-S



MC707VM-S

Three times purification, a good deed for your health

Pollen, dust and pet hair are just some of the potential causes of allergies, asthma and respiratory problems. A Daikin air purifier cleans the air and relieves you of these troubles thanks to a three-part operation:

- allergen removal
- virus and bacteria removal
- odour removal




* Catechin is a natural anti-bacterial substance derived from tea leaves that kills germs that can attach to these particles.

Pure air for free and healthy breathing

- stylish design
- improved performance
- unprecedented comfort
- super quiet operation
- easy to maintain
- portable
- no installation

Flash Streamer unit

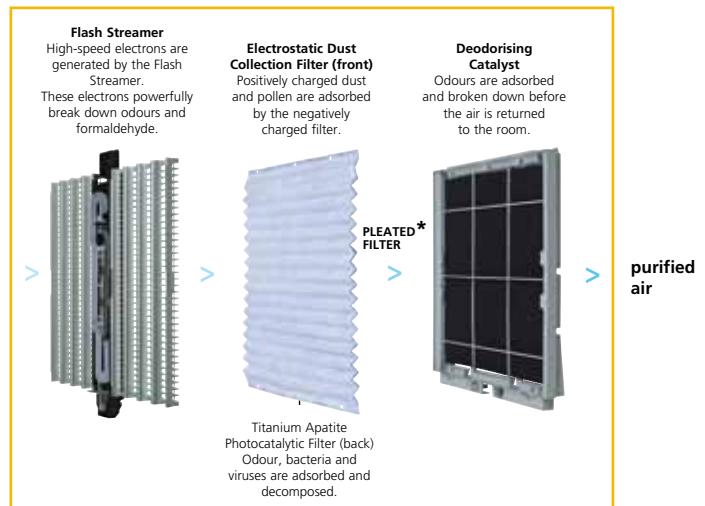

* The filtering surface of a pleated filter is approximately 1.5 times larger than that of a conventional flat filter.

MC707VM-S		MC707VM-S				
Model		MC707VM-S				
Power supply		1~, 220-240/220-230V, 50/60Hz				
Dimensions	HxWxD	533x425x213				
Colour		Sparkling silver + metallic ocean blue				
Weight	Kg	8.7				
Mode (50Hz)		Turbo	H	M	L	Silent
Power input	kW	0.055	0.023	0.014	0.010	0.008
Sound pressure level	dB(A)	47	38	31	24	16
Sound power level	dB(A)	62	52	40	39	31
Air flow rate	m³/h	420	285	180	120	60
Dust collecting method		Plasma ionizer (electrostatic dust collection) + Electrostatic dust collection filter				
Deodorising	Method	Flash Streamer + Titanium apatite photocatalytic filter + Deodorising catalyst				
	Deodorising performance (%)	95				
	Regenerate method	The Flash Streamer activates the photocatalytic reaction				
Bacteria filtering method		Bio-Antibody filter + Flash Streamer + Titanium apatite photocatalytic filter				
Filter	Dust collection and deodorisation	Function	Pleated filter			
		Lifetime	Deodorisation + disinfection + dust collection + adjuvant removal			
	Bio-Antibody filter		1 filter/1 year			
	Pre-filter		New			
	Catechin pre-filter					

POWER SUPPLY

T1 = 3~, 220V, 50HZ

V1 = 1~, 220-240V, 50HZ

VE = 1~, 220-240V, 50HZ/60HZ

V3 = 1~, 230V, 50HZ

VM = 1~, 220~240V/220~230V, 50HZ/60HZ

W1 = 3N~, 400V, 50HZ

Y1 = 3~, 400V, 50HZ

MEASURING CONDITIONS

COOLING ONLY

1) nominal cooling capacities are based on:

indoor temperature	27°CDB/19°CWB
outdoor temperature	35°CDB
refrigerant piping length	7.5m
level difference	0m

HEAT PUMP

1) nominal cooling capacities are based on:

indoor temperature	27°CDB/19°CWB
outdoor temperature	35°CDB
refrigerant piping length	7.5m
level difference	0m

2) nominal heating capacities are based on:

indoor temperature	20°CDB
outdoor temperature	7°CDB/6°CWB
refrigerant piping length	7.5m
level difference	0m

CHILLERS:

Air-cooled	cooling only	evaporator: 12°C/7°C	ambient: 35°C
	heat pump	evaporator: 12°C/7°C	ambient: 35°C
		condenser: 40°C/45°C	ambient: 7°CDB/6°CWB
Water-cooled	cooling only	evaporator: 12°C/7°C	condenser: 30°C/35°C
	heating only	evaporator: 12°C/7°C	condenser: 40°C/45°C
Remote condenser		evaporator: 12°C/7°C	condensing temperature: 45°C / liquid temperature: 40°C
Remote evaporator	cooling capacity/power input conditions	suction dew point: 5°C	ambient: 35°C
		superheat: 10°C	
Fan coil units	cooling	room temperature: 27°C/19°C	
	heating	entering water temperature: 7°C/12°C	
		room temperature: 20°C	
		water inlet temperature: 50°C (2-pipe) / 70°C (4-pipe)	
		water inlet temperature: 70°C (2-pipe & 4-pipe) FWB only	

The sound pressure level is measured via a microphone at a certain distance from the unit. It is a relative value, depending on the distance and acoustic environment (for measuring conditions: please refer to the technical databooks).

The sound power level is an absolute value indicating the "power" which a sound source generates.

For more detailed information please consult our technical databooks.



www.daikin.co.uk

Head Office

Daikin Airconditioning UK Limited

The Heights, Brooklands, Weybridge, Surrey KT13 0NY
Tel 0845 6419000 Fax 0845 6419009



Daikin UK is approved by LRQA for its Quality Management System in accordance with the ISO9001 standard. ISO9001 pertains to quality assurance regarding design, development, manufacturing as well as to services related to the product.



Daikin units comply with the European regulations that guarantee the safety of the product.



ISO14001 assures an effective environmental management system in order to help protect human health and the environment from the potential impact of our activities, products and services and to assist in maintaining and improving the quality of the environment.



Daikin Europe N.V. participates in the Eurovent Certification Programme for Air Conditioners (AC), Liquid Chilling Packages (LCP) and Fan Coil Units (FC); the certified data of certified models are listed in the Eurovent Directory. Multi units are Eurovent certified for combinations up to 2 indoor units. VRV products, Rooftops, FWB-J and FWD-units are not within the scope of the Eurovent Certification Programme.

The present catalogue is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this catalogue to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this catalogue. All content is copyrighted by Daikin Europe N.V..



Authorised User No. 00081



Visit www.eca.gov.uk/etl and type 'Daikin' in the quick search box for details of the latest ECA qualifying Daikin units

UKEPCEN10-500 / 04.10 / DesignHQ / La Movida. Copyright 2010 Daikin.
The present publication supersedes UKEPCEN09-500
Printed in the UK on FSC certified paper from sustainable sources.