




Air Conditioning Technical Data

Multi model application

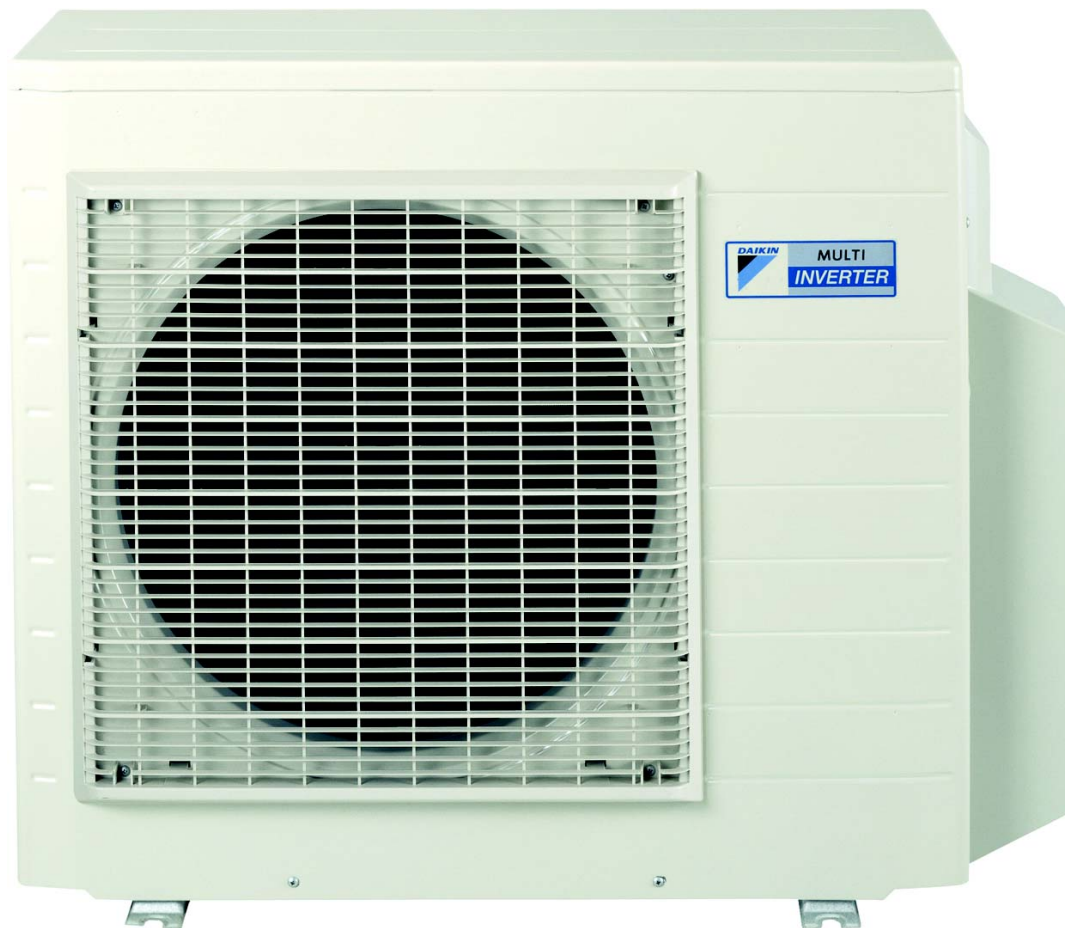

EEDEN15-100

MXS-K

TABLE OF CONTENTS

MXS-K

1	Features	2
2	Specifications	3
	Technical Specifications	3
	Electrical Specifications	4
3	Electrical data	5
4	Options	6
5	Combination table	7
6	Capacity tables	8
	Capacity Table Legend	8
7	Dimensional drawings	9
8	Centre of gravity	10
9	Piping diagrams	11
10	Wiring diagrams	12
	Wiring Diagrams - Single Phase	12
11	Sound data	13
	Sound Pressure Spectrum - Cooling	13
	Sound Pressure Spectrum - Heating	14
12	Operation range	15

1 Features

- Outdoor units for multi model application.
- Up to 3 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time
- Different types of indoor units can be connected: e.g. wall mounted, ceiling mounted cassette corner, concealed ceiling unit
- The use of inverter type outdoor units results in an air conditioning system with a high energy efficiency and very low sound level
- Night quiet mode automatically reduces the operation sound of the outdoor unit by 3dBA during nighttime (multi outdoor units in cooling mode only)
- Outdoor unit silent operation: "silent" button on the remote control lowers the operation sound of the outdoor unit by 3dBA to ensure a quiet environment for the neighbourhood.
- Energy saving during standby mode: reduces current consumption by about 80% when operating in standby. If no people are detected for more than 20 minutes, the system will automatically switch to the current-saving mode.
- Anti-corrosion treated outdoor heat exchanger fin
- Daikin outdoor units are neat, sturdy and can easily be mounted on a roof or terrace or simply placed against an outside wall
- Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency



Inverter



Energy saving during standby mode



Outdoor unit silent operation



Night quiet mode



Self diagnosis

2 Specifications

2-1 Technical Specifications				3MXS40K		
Capacity control	Method			Inverter controlled		
Casing	Colour			Ivory white		
Dimensions	Unit	Height	mm	735		
		Width	mm	936		
		Depth	mm	300		
	Packed unit	Height	mm	797		
		Width	mm	992		
Depth		mm	390			
Weight	Unit		kg	49		
	Packed unit		kg	56		
Heat exchanger	Length		mm	845		
	Rows	Quantity		2		
	Fin pitch		mm	1.8		
	Stages	Quantity		32		
	Tube type			ø7.94 grooved tubes G2A		
	Fin	Type		Colgate fin		
		Treatment		Anti-corrosion treatment		
Compressor	Model			2YC36BXD		
	Type			Hermetically sealed swing compressor		
	Output		W	1,100		
Fan	Type				Propeller fan	
	Air flow rate	Cooling	High	m ³ /min	45	
				cfm	1,589	
			Nom.	m ³ /min	45	
				cfm	1,589	
			Low	m ³ /min	41	
		cfm		1,448		
		Super low	m ³ /min	-		
			cfm	-		
		Heating	High	m ³ /min	45	
				cfm	1,589	
	Low		m ³ /min	41		
			cfm	1,448		
	Super low		m ³ /min	-		
		cfm	-			
	Running current	Cooling	Low	A	0.29	
			High	A	0.33	
Heating		Low	A	0.29		
		High	A	0.33		
Power consumption	Cooling	Low	W	34		
		High	W	43		
	Heating	Low	W	34		
		High	W	43		
Fan motor	Model			KFD-380-50-8C		
	Output		W	53		
	Speed	Cooling	High	rpm	720	
			Low	rpm	660	
			Super low	rpm	-	
		Heating	High	rpm	720	
			Low	rpm	660	
Super low			rpm	-		
Sound power level	Cooling		dBA	59		
	Heating		dBA	60		
Sound pressure level	Cooling	Nom.	dBA	46		
	Heating	Nom.	dBA	47		

2 Specifications

2

2-1 Technical Specifications					3MXS40K
Operation range	Cooling	Ambien t	Min.	°CDB	-10
			Max.	°CDB	46
	Heating	Ambien t	Min.	°CWB	-15
			Max.	°CWB	18
Refrigerant	Type				R-410A
	Charge			kg	2.0
				TCO ₂ eq	4.2
	GWP				2,087.5
Refrigerant oil	Type				FVC50K
	Charged volume			l	0.65
Piping connections	Liquid	Quantity			3
		OD		mm	6.35
	Gas	Quantity			3
		OD		mm	9.5
	Drain	ID			-
		OD		mm	16 (inner diameter of connecting hose)
	Piping length	OU - IU	Max.	m	25
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 30m)
	Level difference	IU - OU	Max.	m	15
		IU - IU	Max.	m	7.5
	Heat insulation				Both liquid and gas pipes
	Total piping length	System	Actual	m	50

Standard Accessories : Installation manual; Quantity : 1;

Standard Accessories : Drain plug; Quantity : 1;

2-2 Electrical Specifications					3MXS40K
Power supply	Name				V1
	Phase				1~
	Frequency			Hz	50
	Voltage			V	230
Current	Starting current	Cooling	A	4.0	
		Heating	A	4.0	
Current - 50Hz	Maximum fuse amps (MFA)			A	16
Current - 60Hz	Maximum fuse amps (MFA)			A	-
Wiring connections	For power supply	Remark		3 for power supply, 4 for interunit wiring (including earth wiring)	

Notes

Contains fluorinated greenhouse gases

3 Electrical data

3 - 1 Electrical Data

3MXS40K											
Model		Units				Power supply		Comp.		OFM	
Outdoor	H/P C/O	Hz	Volts	Min.	Max.	MCA	MFA	MSC	RLA	W	FLA
3MXS40K	H/P	50	220	198	242	13.4	16	4.2	3.3	44	0.30
			230	207	253			4.0	3.1		
			240	216	264			3.8	2.9		

3D074910A

SYMBOLS

- MCA : Min. Circuit Amps (A)
- MFA : Max. Fuse Amps (See note6) (A)
- MSC : Max. current during the starting compressor (A)
- RLA : Rated Load Amps (A)
- OFM : Outdoor Fan Motor (A)
- FLA : Full Load Amps (A)
- W : Fan Motor Rated Output (W)

NOTES

1. RLA is based on the following conditions:
Cooling
Indoor temp.: 27°CDB/19.0°CWB
Outdoor temp. : 35°CDB
2. Voltage range.
Units are suitable for use on electrical systems where voltage supplied to unit terminals is not below or above listed operation range limits.
3. Maximum allowable voltage unbalance between phases is 2%.
4. MCA represents maximum input current.
MFA represents capacity which may accept MCA.
5. Select wire size based on the larger value of MCA.
6. MFA is used to select the circuit breaker and the ground fault circuit interrupter (earth leakage circuit breaker).

4 Options

4 - 1 Options

3MXS40K

Outdoor Units

	3MXS40K
Air direction adjustment grille	KPW945A4

5 Combination table

5 - 1 Combination Table

3MXS40K COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			TOTAL CURRENT (A)			POWER FACTOR (%)	EER	ENERGY LABEL	AEC (kWh)	Seasonal data			
		A ROOM	B ROOM	C ROOM	D ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					label	SEER	Pdesign	AEC
3MXS40K	1.5+1.5	1.50	1.50	—	—	1.78	3.00	4.20	0.35	0.63	1.12	1.60	2.80	5.00	98.00	4.76	A	315	A++	6.55	3.00	161
	1.5+2.0	1.50	2.00	—	—	1.78	3.50	4.20	0.35	0.80	1.12	1.50	3.50	4.90	99.00	4.38	A	400	A++	6.77	3.50	182
	1.5+2.5	1.50	2.50	—	—	1.78	4.00	4.20	0.35	0.98	1.12	1.50	4.30	4.90	99.00	4.08	A	490	A++	6.86	4.00	205
	1.5+3.5	1.20	2.80	—	—	1.78	4.00	4.21	0.35	0.98	1.12	1.50	4.30	4.90	99.00	4.08	A	490	A++	6.69	4.00	210
	2.0+2.0	2.00	2.00	—	—	1.88	4.00	4.54	0.35	0.95	1.12	1.50	4.20	4.90	99.00	4.21	A	475	A++	6.90	4.00	203
	2.0+2.5	1.78	2.22	—	—	1.88	4.00	4.54	0.35	0.95	1.12	1.50	4.20	4.90	99.00	4.21	A	475	A++	6.90	4.00	203
	2.0+3.5	1.45	2.55	—	—	1.88	4.00	4.55	0.35	0.95	1.09	1.50	4.20	4.80	99.00	4.21	A	475	A++	6.73	4.00	209
	2.5+2.5	2.00	2.00	—	—	1.88	4.00	4.54	0.35	0.95	1.12	1.50	4.20	4.90	99.00	4.21	A	475	A++	6.90	4.00	203
	2.5+3.5	1.67	2.33	—	—	1.88	4.00	4.54	0.35	0.95	1.12	1.50	4.20	4.90	99.00	4.21	A	475	A++	6.73	4.00	209
	3.5+3.5	2.00	2.00	—	—	1.88	4.00	4.58	0.35	0.95	1.12	1.50	4.20	4.90	99.00	4.21	A	475	A++	6.56	4.00	214
	1.5+1.5+1.5	1.33	1.33	1.33	—	1.80	4.00	4.60	0.35	0.83	0.98	1.50	3.60	4.30	99.00	4.82	A	415	A++	6.97	4.00	201
	1.5+1.5+2.0	1.20	1.20	1.60	—	1.80	4.00	4.60	0.35	0.84	0.98	1.50	3.70	4.30	99.00	4.76	A	420	A++	6.97	4.00	201
	1.5+1.5+2.5	1.09	1.09	1.82	—	1.80	4.00	4.60	0.35	0.84	0.98	1.50	3.70	4.30	99.00	4.76	A	420	A++	6.97	4.00	201
	1.5+1.5+3.5	0.92	0.92	2.15	—	1.80	4.00	4.60	0.37	0.84	0.98	1.60	3.70	4.30	99.00	4.76	A	420	A++	6.80	4.00	206
	1.5+2.0+2.0	1.09	1.45	1.45	—	1.80	4.00	4.60	0.35	0.84	0.98	1.50	3.70	4.30	99.00	4.76	A	420	A++	6.98	4.00	201
	1.5+2.0+2.5	1.00	1.33	1.67	—	1.80	4.00	4.60	0.35	0.84	0.98	1.50	3.70	4.30	99.00	4.76	A	420	A++	6.98	4.00	201
	1.5+2.0+3.5	0.86	1.14	2.00	—	1.80	4.00	4.60	0.37	0.84	0.98	1.60	3.70	4.30	99.00	4.76	A	420	A++	6.81	4.00	206
	1.5+2.5+2.5	0.92	1.54	1.54	—	1.80	4.00	4.60	0.37	0.84	0.98	1.60	3.70	4.30	99.00	4.76	A	420	A++	6.98	4.00	201
	2.0+2.0+2.0	1.33	1.33	1.33	—	1.86	4.00	4.60	0.35	0.81	0.98	1.50	3.60	4.30	99.00	4.94	A	405	A++	7.02	4.00	200
	2.0+2.0+2.5	1.23	1.23	1.54	—	1.86	4.00	4.60	0.35	0.81	0.98	1.50	3.60	4.30	99.00	4.94	A	405	A++	7.02	4.00	200
2.0+2.5+2.5	1.14	1.43	1.43	—	1.95	4.00	4.60	0.37	0.81	0.98	1.60	3.60	4.30	99.00	4.94	A	405	A++	7.02	4.00	200	

HEATING

OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			TOTAL CURRENT (A)			POWER FACTOR (%)	COP	ENERGY LABEL	Seasonal data				
		A ROOM	B ROOM	C ROOM	D ROOM	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
3MXS40K	1.5+1.5	2.30	2.30	—	—	1.22	4.60	5.00	0.31	1.11	1.29	1.4	4.9	5.7	99	4.14	A	A+	4.09	3.59	1229	0.68
	1.5+2.0	1.97	2.63	—	—	1.22	4.60	5.00	0.31	1.11	1.29	1.4	4.9	5.7	99	4.14	A	A+	4.12	3.61	1227	0.68
	1.5+2.5	1.73	2.88	—	—	1.22	4.60	5.00	0.31	1.10	1.29	1.4	4.8	5.7	99	4.18	A	A+	4.04	4.73	1640	0.91
	1.5+3.5	1.38	3.22	—	—	1.25	4.60	5.02	0.31	1.10	1.29	1.4	4.8	5.7	99	4.18	A	A+	4.17	4.84	1624	0.93
	2.0+2.0	2.30	2.30	—	—	1.28	4.60	5.00	0.31	1.11	1.29	1.4	4.9	5.7	99	4.14	A	A+	4.05	4.75	1641	0.92
	2.0+2.5	2.04	2.56	—	—	1.28	4.60	5.00	0.31	1.10	1.29	1.4	4.8	5.7	99	4.18	A	A+	4.07	4.76	1636	0.92
	2.0+3.5	1.67	2.93	—	—	1.34	4.60	5.02	0.31	1.10	1.29	1.4	4.8	5.7	99	4.18	A	A+	4.23	4.86	1609	0.93
	2.5+2.5	2.30	2.30	—	—	1.28	4.60	5.00	0.31	1.10	1.29	1.4	4.8	5.7	99	4.18	A	A+	4.08	4.77	1636	0.92
	2.5+3.5	1.92	2.68	—	—	1.34	4.60	5.02	0.31	1.10	1.29	1.4	4.8	5.7	99	4.18	A	A+	4.24	4.87	1610	0.93
	3.5+3.5	2.30	2.30	—	—	1.40	4.60	5.04	0.31	1.10	1.28	1.4	4.8	5.6	99	4.18	A	A+	4.37	4.93	1580	0.94
	1.5+1.5+1.5	1.53	1.53	1.53	—	1.32	4.60	5.00	0.32	0.91	1.02	1.4	4.0	4.5	99	5.05	A	A+	4.29	4.93	1609	0.94
	1.5+1.5+2.0	1.38	1.38	1.84	—	1.32	4.60	5.07	0.32	0.91	1.02	1.4	4.0	4.5	99	5.05	A	A+	4.31	4.94	1605	0.95
	1.5+1.5+2.5	1.25	1.25	2.09	—	1.32	4.60	5.07	0.32	0.91	1.02	1.4	4.0	4.5	99	5.05	A	A+	4.31	4.94	1603	0.94
	1.5+1.5+3.5	1.06	1.06	2.48	—	1.32	4.60	5.09	0.32	0.91	1.01	1.4	4.0	4.4	99	5.05	A	A+	4.39	4.95	1578	0.94
	1.5+2.0+2.0	1.25	1.67	1.67	—	1.32	4.60	5.07	0.32	0.91	1.02	1.4	4.0	4.5	99	5.05	A	A+	4.32	4.94	1602	0.94
	1.5+2.0+2.5	1.15	1.53	1.92	—	1.33	4.60	5.07	0.32	0.91	1.02	1.4	4.0	4.5	99	5.05	A	A+	4.36	4.94	1588	0.94
	1.5+2.0+3.5	0.99	1.31	2.30	—	1.33	4.60	5.09	0.32	0.91	1.01	1.4	4.0	4.4	99	5.05	A	A+	4.40	4.95	1575	0.95
	1.5+2.5+2.5	1.06	1.77	1.77	—	1.33	4.60	5.07	0.32	0.91	1.02	1.4	4.0	4.5	99	5.05	A	A+	4.34	4.95	1596	0.95
	2.0+2.0+2.0	1.53	1.53	1.53	—	1.34	4.60	5.07	0.32	0.91	1.02	1.4	4.0	4.5	99	5.05	A	A+	4.34	4.95	1596	0.95
	2.0+2.0+2.5	1.42	1.42	1.77	—	1.34	4.60	5.07	0.32	0.91	1.02	1.4	4.0	4.5	99	5.05	A	A+	4.35	4.95	1594	0.95
2.0+2.5+2.5	1.31	1.64	1.64	—	1.45	4.60	5.07	0.32	0.91	1.02	1.4	4.0	4.5	99	5.05	A	A+	4.36	4.95	1590	0.94	

NOTES - ANMERKUNGEN - ΣΗΜΕΙΩΣΕΙΣ - NOTAS - REMARQUES - NOTE - OPMERKINGEN - ПРИМЕЧАНИЯ - NOTLAR

- Cooling capacity is based on 27°CDB/19°CWB (Indoor temperature), 35°CDB (Outdoor temperature). Heating capacity is based on 20°CDB (Indoor temperature), 7°CDB/6°CWB (Outdoor temperature).
 Kühlleistungen basieren auf 27 °C TK/19 °C FK (Innen Temperatur), 35 °C TK (Außen Temperatur).
 Heizleistungen basieren auf 20 °C TK (Innen Temperatur), 7 °C TK/6 °C FK (Außen Temperatur).
 Η ψυκτική απόδοση βασίζεται σε 27 °CDB / 19 °CWB (θερμοκρασία εσωτερικού χώρου), 35 °CDB (εξωτερική θερμοκρασία).
 Η απόδοση θέρμανσης βασίζεται σε 20 °CDB (θερμοκρασία εσωτερικού χώρου), 7 °CDB/6 °CWB (εξωτερική θερμοκρασία).
 Capacidad de refrigeración basada en 27 °CDB/19 °CWB (temperatura interior), 35 °CDB (temperatura exterior).
 Capacidad de calefacción basada en 20 °CDB (temperatura interior), 7 °CDB/6 °CWB (temperatura exterior).
 La puissance frigorifique est basée sur les conditions suivantes : 27 °CDB/19 °CWB (température intérieure), 35 °CDB (température extérieure).
 La puissance calorifique est basée sur les conditions suivantes : 20 °CDB (température intérieure), 7 °CDB/6 °CWB (température extérieure).
 La capacità di raffreddamento si basa su 27 °CDB/19 °CWB (temperatura interna), 35 °CDB (temperatura esterna).
 La capacità di riscaldamento si basa su 20 °CDB (temperatura interna), 7 °CDB/6 °CWB (temperatura esterna).
 Het koelvermogen is gebaseerd op 27 °C DB/19 °C NB (binnentemperatuur), 35 °C DB (buitentemperatuur).
 Het verwarmingsvermogen is gebaseerd op 20 °C DB (binnentemperatuur), 7 °C DB/6 °C NB (buitentemperatuur).
 Холодопроизводительность при 27°С сух.т./19°С вл.т. (температура в помещении), 35°С сух.т. (температура наружного воздуха).
 Теплопроизводительность при 20°С сух.т. (температура в помещении), 7°С сух.т./6°С вл.т. (температура наружного воздуха).
 Soğutma kapasitesi şu koşullara dayalıdır: 27°С КТ/19°С YТ'ye (İç ortam sıcaklığı), 35°С КТ (Dış ortam sıcaklığı).
 Isıtma kapasitesi şu koşullara dayalıdır: 20°С КТ (İç ortam sıcaklığı), 7°С КТ/6°С YТ (Dış ortam sıcaklığı).
- The total ability of connected a indoor unit is up to 7.0kW.
 Die Gesamtleistungsfähigkeit der angeschlossenen Innengeräte beträgt bis zu 7 kW.
 Η συνολική ικανότητα μιας συνδεδεμένης εσωτερικής μονάδας είναι μέχρι 7,0kW.
 La capacidad total de una unidad interior conectada es de hasta 7,0 kW.
 La capacité totale d'une unité intérieure connectée est de 7,0 kW maximum.
 La capacità totale di un'unità interna collegata raggiunge i 7,0kW.
 Het totaal vermogen van een aangesloten binneneenheid is tot 7,0 kW.
 Общая мощность подключенного внутреннего блока – до 7,0 кВт.
 Bağlı iç ünitelerin toplam kapasitesi maksimum 7,0kW'dır.
- It is impossible to connect the indoor unit for one room only.
 Es ist nicht möglich, das Innengerät für nur einen Raum anzuschließen.
 Είναι αδύνατο η σύνδεση της εσωτερικής μονάδας μόνο για ένα δωμάτιο.
 Es imposible conectar la unidad interior para una sola habitación.
 Il est impossible de connecter l'unité intérieure pour une seule pièce.
 È impossibile collegare l'unità interna per un solo locale.
 Het is niet mogelijk om alleen een binneneenheid voor één vertrek aan te sluiten.
 Невозможно подключить внутренний блок только для одной комнаты.
 İç ünitelerin yalnızca tek bir oda için bağlanması mümkün değildir.
- The above is the value for connecting with the following indoor units.
 1,5kW: wall mounted CTXS-K series; 2,0, 2,5, 3,5kW: wall mounted FTXS-K series
 Der obige Wert gilt für den Anschluss folgender Innengeräte.
 1,5kW: Wandgerät Baureihe CTXS-K; 2,0, 2,5, 3,5kW: Wandgerät Baureihe FTXS-K
 Η παραπάνω είναι τιμή για σύνδεση με τις παρακάτω εσωτερικές μονάδες.
 1,5kW: επιτοίχιο σέρβ CTXS-K 2,0, 2,5, 3,5kW: επιτοίχιο σέρβ FTXS-K
 Arriba aparece el valor de conexión para las siguientes unidades interiores
 1,5 kW: serie CTXS-K montada en pared; 2,0, 2,5, 3,5 kW: serie FTXS-K montada en pared
 La valeur ci-avant est la valeur pour la connexion aux unités intérieures suivantes :
 1,5 kW : unités murales série CTXS-K ; 2,0 / 2,5 / 3,5 kW : unités murales série FTXS-K
 Sopra è mostrato il valore per il collegamento alle seguenti unità interne.
 1,5kW: serie CTXS-K a parete; 2,0, 2,5, 3,5kW: serie FTXS-K a parete
 De bovenstaande waarde is de waarde voor aansluiting met de volgende binneneenheids.
 1,5 kW: muurmodellen CTXS-K-serie; 2,0/2,5/3,5 kW: muurmodellen FTXS-K-serie
 Выше приведено значение для соединения со следующими внутренними блоками.
 1,5 кВт: настенный блок серии CTXS-K; 2,0, 2,5, 3,5 кВт: настенный блок серии FTXS-K
 Aşağıdaki iç ünitelere bağlantı için geçerli veriler yukarıda verilmiştir.
 1,5kW: duvar tipi CTXS-K serisi; 2,0, 2,5, 3,5kW: duvar tipi FTXS-K serisi

6 Capacity tables

6 - 1 Capacity Table Legend

6

In order to fulfill more your requirements on quick access of data in the format you require, we have developed a tool to consult capacity tables.

Below you can find the link to the capacity table database and an overview of all the tools we have, to help you select the correct product:

- Capacity table database: makes you find back and export quickly the capacity information you are looking for based upon unit model, refrigerant temperature and connection ratio.

→ <http://extranet.daikineurope.com/captab>

- E-data app: gives a complete overview of the Daikin products available in your country, with all engineering data and commercial info in your own language. Download the app now!

→ <https://itunes.apple.com/us/app/daikin-e-data/id565955746?mt=8>

→ <https://play.google.com/store/apps/details?id=com.daikineurope.edata&hl=en>



- Selection software: allows you to make equipment selections for Split.

→ <http://extranet.daikineurope.com/en/software/downloads/default.jsp>

7 Dimensional drawings

7 - 1 Dimensional Drawings

3MXS40K

2-cuts for anchor bolts (M8 or M10)

Minimum space for air passage

Wall height on air outlet side = less than 1200

300 or more

Dimension A

H ≤ 1200	350
H > 1200	600

Installation space for discharge side (mm)

4 Terminal strip

4 Earth terminal

Name plate

Interconnecting piping and wiring inlet

Outdoor air thermistor

Liquid stop valve

Service port

Gas stop valve

<room A> Gas pipe (φ 9.5 single union)

Liquid pipe (φ 6.4 single union)

<room B> Gas pipe (φ 9.5 single union)

Liquid pipe (φ 6.4 single union)

<room C> Gas pipe (φ 9.5 single union)

Liquid pipe (φ 6.4 single union)


Liquid	φ 6.4	95
Gas	φ 9.5	85

3D073393A

8 Centre of gravity


8 - 1 Centre of Gravity

8

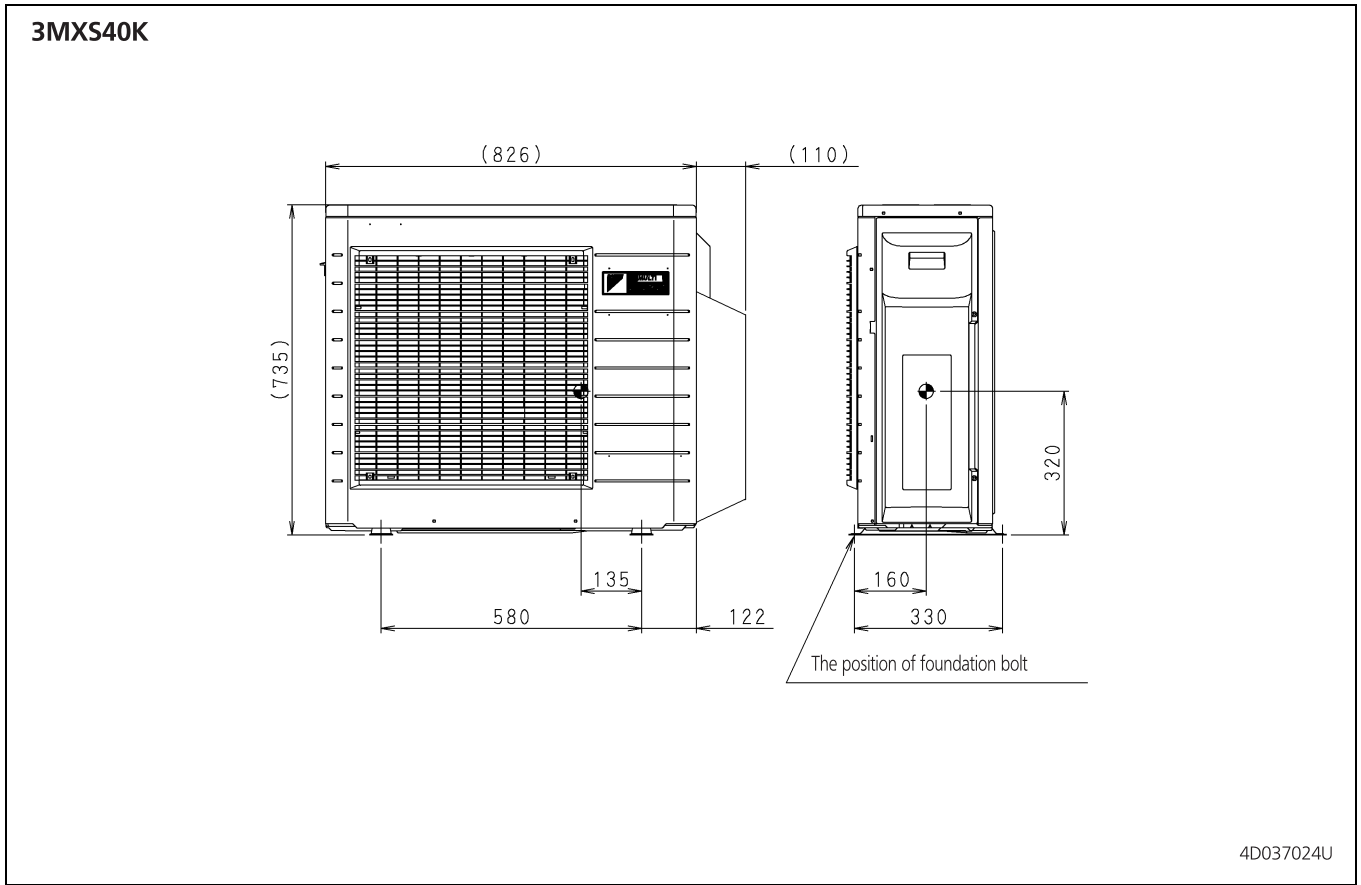

9 Piping diagrams


9 - 1 Piping Diagrams

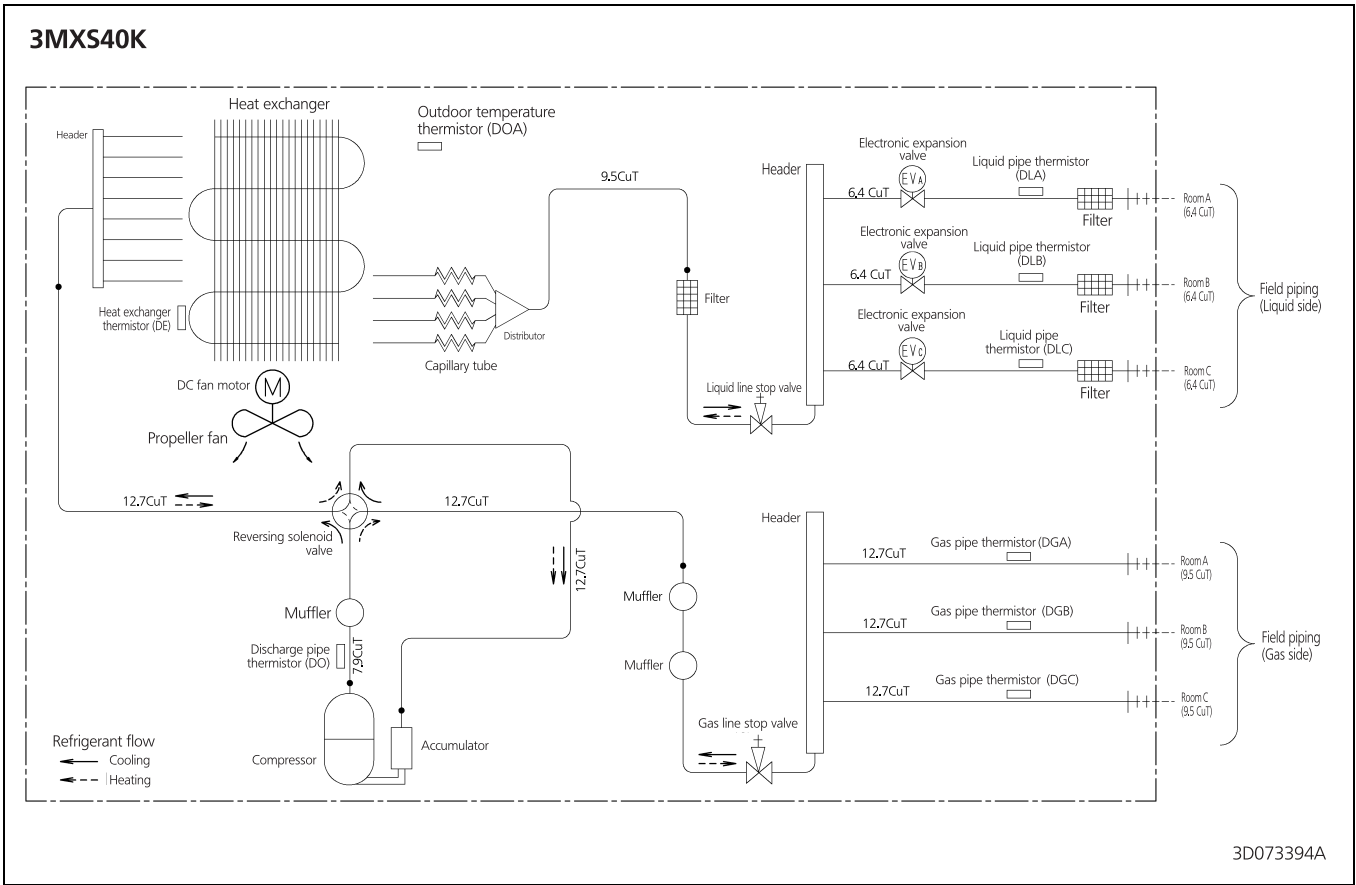

10 Wiring diagrams

10 - 1 Wiring Diagrams - Single Phase


10

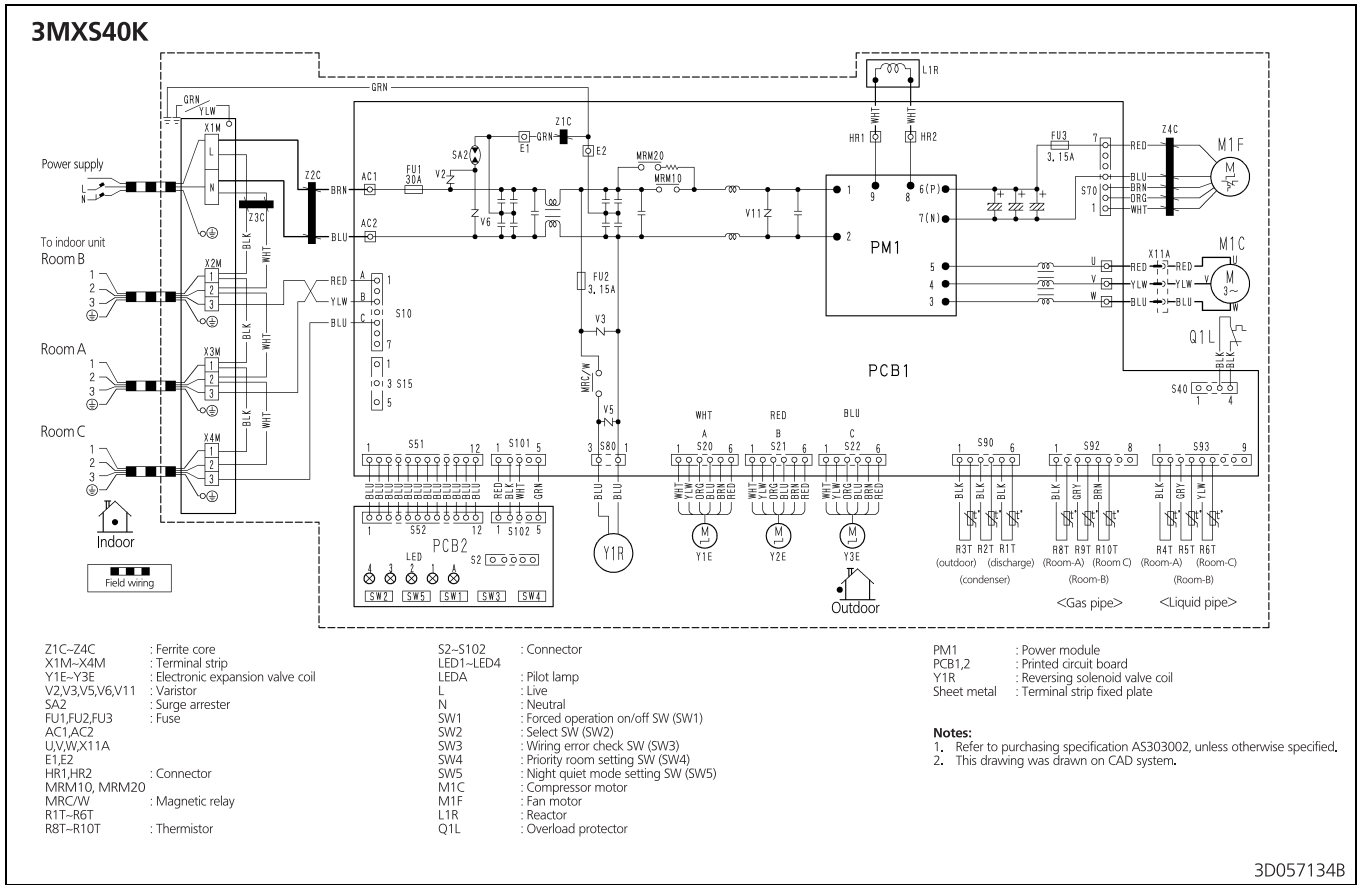

3D057134B

11 Sound data


11 - 1 Sound Pressure Spectrum - Cooling

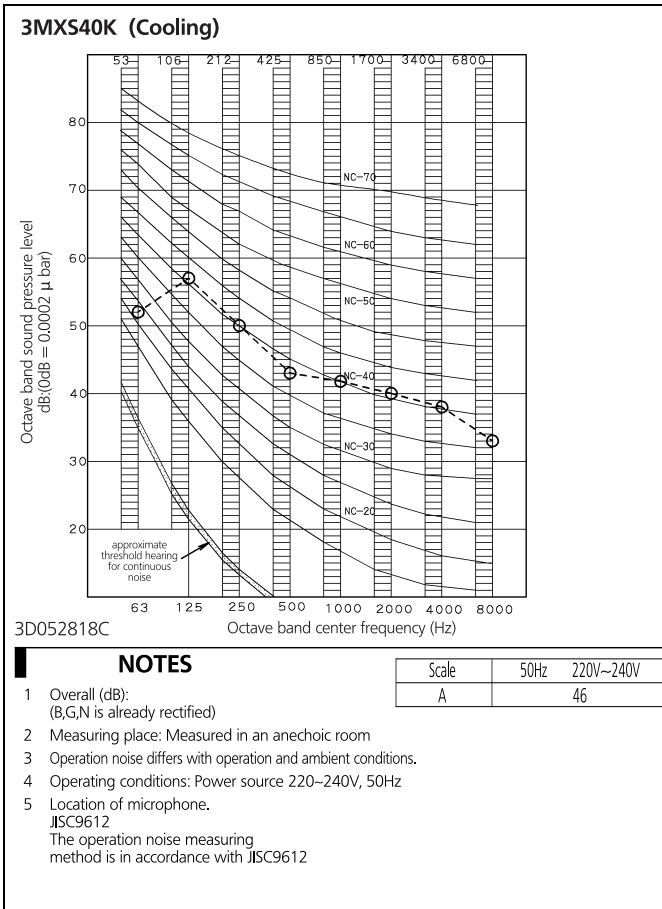

11 Sound data

11 - 2 Sound Pressure Spectrum - Heating



11

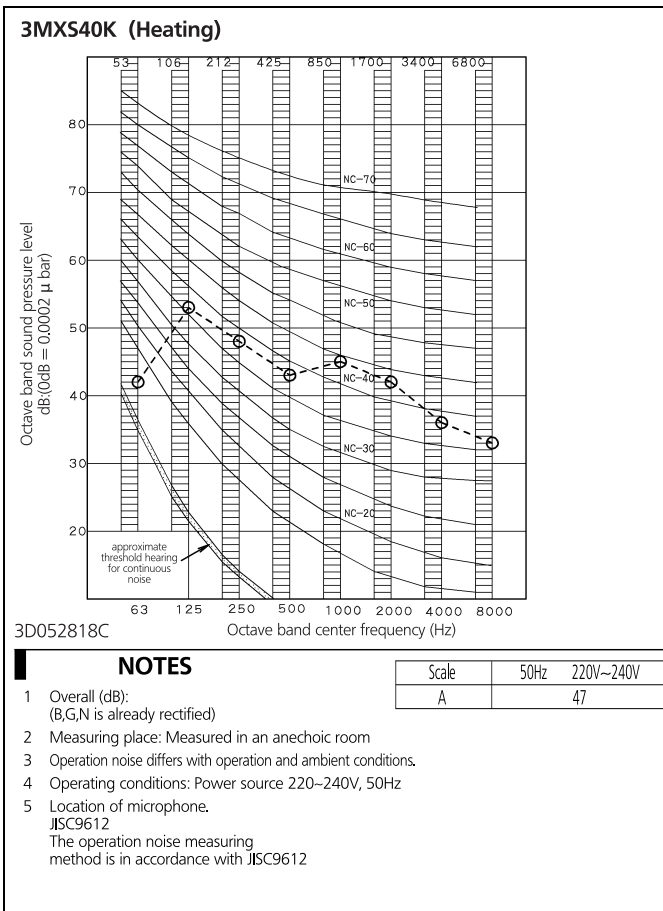

12 Operation range

12 - 1 Operation Range

3MXS40K

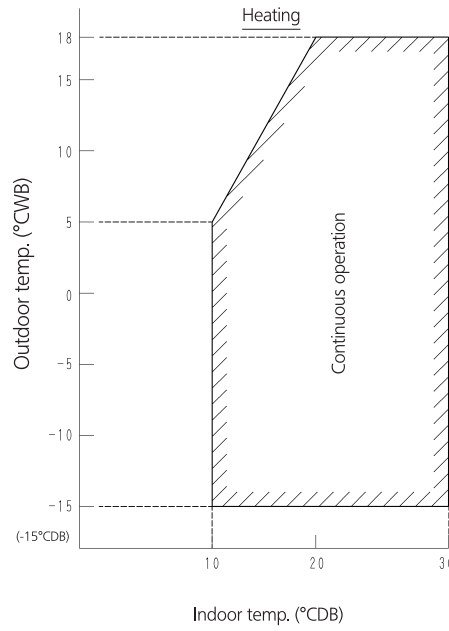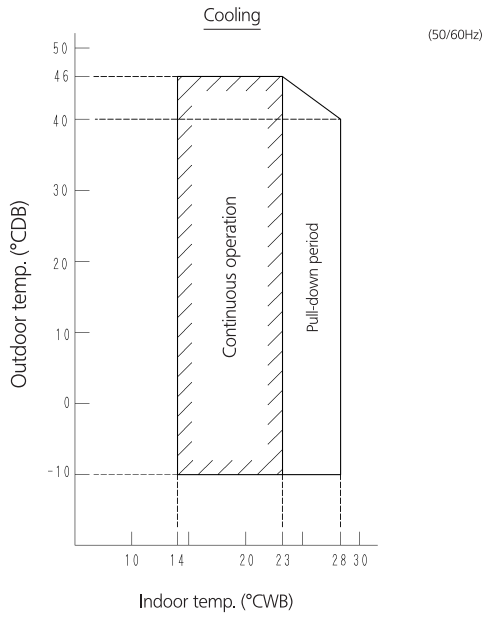

Notes:

The graphs are based on the following conditions:

- Equivalent piping length 7.5 m
- Level difference 0 m
- Air flow rate high

3D034956Q



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.

BARCODE

Daikin products are distributed by: