



Air Conditioning

Technical Data

High COP, round flow cassette



EEDEN15-100

FCQHG-F

TABLE OF CONTENTS

FCQHG-F

1	Features	2
2	Specifications	3
	Technical Specifications	3
	Electrical Specifications	4
3	Safety device settings	5
4	Options	6
5	Dimensional drawings	7
	Dimensional Drawings with Accessories	7
6	Centre of gravity	10
7	Piping diagrams	11
8	Wiring diagrams	12
	Wiring Diagrams - Single Phase	12
9	External connection diagrams	13
10	Sound data	14
	Sound Pressure Spectrum	14
11	Air flow patterns	17
	Air Flow Pattern - Cooling	17
	Air Flow Pattern - Heating	21

1 Features

- High COP cassette ensures top performance, great savings in energy consumption and a comfortable environment for commercial applications
- 360° air discharge ensures uniform air flow and temperature distribution
- The round flow cassette provides a more comfortable environment and offers greater savings in energy consumption to shop, office and restaurant owners
- Daily automatic filter cleaning results in higher efficiency & comfort and lower maintenance costs. Dust can easily be removed with a vacuum cleaner without opening the unit
- Two optional intelligent sensors improve energy efficiency and comfort. The presence sensor adjusts the set point if no one is detected in the room. It also automatically directs air flow away from any person to avoid draught. The infrared floor sensor detects the average floor temperature and ensures even temperature distribution between ceiling and floor to prevent cold feet.
- Refurbishing the room? Flexibility to suit every room layout without changing the location of the unit! Via the wired remote controller you can easily control each flap individually and even close the flaps.
- Modern style decoration panel is available in 3 different variations: white (RAL9010) with grey louvers, full white (RAL9010) or auto cleaning panel
- Reduced energy consumption thanks to specially developed small tube heat exchanger, DC fan motor and drain pump
- Fresh air intake integrated in the same system thus reducing installation cost as no additional ventilation is required
- Lowest installation height in the market: 204mm for class 71
- Standard drain pump with 850mm lift increases flexibility and installation speed
- No optional adapter needed for DIII-connection, link your unit into the wider building management system.



Presence & floor sensor	Home leave operation	Fan only	Auto-cleaning filter	Draught prevention	Whisper quiet	Ceiling soiling prevention	Individual flap control	Vertical auto swing
Fan speed steps	Dry programme	Air filter	Weekly timer	Infrared remote control	Wired remote control	Auto-restart	Self diagnosis	Drain pump kit

2 Specifications

2-1 Technical Specifications					FCQH71F	FCQH100F	FCQH125F	FCQH140F
Casing	Material				Galvanised steel plate			
Dimensions	Unit	Height/Width/Depth	mm		288/840/840			
	Packed unit	Height/Width/Depth	mm		300/880/880			
Weight	Unit		kg		25	26		
	Packed unit		kg		29	30		
Decoration panel	Model				BYCQ140D7W1			
	Colour				Pure White (RAL 9010)			
	Dimensions	Height/Width/Depth	mm		50/950/950			
	Weight		kg		5.4			
Decoration panel 2	Model				BYCQ140D7W1W			
	Colour				Pure White (RAL 9010)			
	Dimensions	Height/Width/Depth	mm		50/950/950			
	Weight		kg		5.4			
Decoration panel 3	Model				BYCQ140D7GW1			
	Colour				Pure White (RAL 9010)			
	Dimensions	Height/Width/Depth	mm		130/950/950			
	Weight		kg		10.3			
Heat exchanger	Inside length		mm		2,090			
	Outside length		mm		2,184			
	Rows	Quantity			3			
	Fin pitch		mm		1.2			
	Passes	Quantity			17			
	Face area		m²		0.556			
	Stages	Quantity			18			
	Empty tubeplate hole	Quantity			0			
	Fin	Type			Cross fin coil (multi slit fins and hi-XA tubes)			
Air filter	Type				Resin net with mold resistance			
Fan	Type				Turbo fan			
	Quantity				1			
	Air flow rate	Cooling	High	m³/min	21.2	32.3	33.5	
			Nom.	m³/min	16.7	25.7	26.7	27.3
			Low	m³/min	12.2	19.0	19.9	21.1
		Heating	High	m³/min	21.2	32.3	33.5	
			Nom.	m³/min	16.7	25.7	26.7	27.3
Low			m³/min	12.2	19.0	19.9	21.1	
Fan motor	Model				QTS48C15M			
	Speed	Steps			3			
	Output	High		W	48	106		
Sound power level	Cooling			dBA	53	61		
	Heating			dBA	53	61		
Sound pressure level	Cooling	High/Nom./Low		dBA	36/33/29	44/39/33	45/40/35	45/41/37
	Heating	Super high/High/ Nom./Low		dBA	-/36/33/29	-/44/39/33	-/45/40/35	-/45/41/37
Refrigerant	Type				R-410A			
Piping connections	Sound absorbing insulation				Foamed Polyurethane			
	Liquid	Type/OD		mm	Flare connection/9.52			
	Gas	Type/OD		mm	Flare connection/15.9			
	Drain				VP25 (I.D. 25/O.D. 32)			
	Heat insulation				Foamed polystyrene / Foamed polyethylene			
Control systems	Infrared remote control				BRC7FA532F			
	Wired remote control				BRC1D52 / BRC1E52A/B	BRC1D52 / BRC1E52A/B	BRC1D52 / BRC1E52A/B	BRC1D52 / BRC1E52A/B

2 Specifications

Standard Accessories : Insulation for fitting; Quantity : 2;

Standard Accessories : Drain hose;

Standard Accessories : Installation manual;

Standard Accessories : Clamps;

Standard Accessories : Operation manual;

Standard Accessories : Washer for hanger bracket;

Standard Accessories : Clamp for drain hose;

Standard Accessories : Installation guide;

Standard Accessories : Sealing pads; Quantity : 4;

Standard Accessories : Screws;

Standard Accessories : Drain sealing pad;

2-2 Electrical Specifications			FCQHG71F	FCQHG100F	FCQHG125F	FCQHG140F
Power supply	Name		VE			
	Phase		1~			
	Frequency	Hz	50			
	Voltage	V	220-240			

Notes

(1) The sound power level is an absolute value indicating the power which a sound source generates.

(2) The BYCQ140D7W1W has white insulations. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140D7W1W decoration panel in environments exposed to concentrations of dirt.

(3) BYCQ140D7W1: pure white standard panel with grey louvers; BYCQ140D7W1W: pure white standard panel with white louvers; BYCQ140D7GW1: pure white auto cleaning panel.

3 Safety device settings

3 - 1 Safety Device Settings

FCQHG71-125F

Safety devices		FCQHG71FVEB	FCQHG100FVEB	FCQHG125FVEB
Fuse		---	---	---
Fan motor thermal fuse	°C	---	---	---
Fan motor thermal protector	°C	---	---	---
Drain pump fuse	°C	---	---	---

3D077129

4 Options

4 - 1 Options

FCQHG-F

OPTIONS

	Item	Model	FCQHG71FVEB	FCQHG100FVEB
1	Decoration panel	Standard	BYCQ140D7W1	
		White	BYCQ140D7W1W *3	
		Self clean	BYCQ140D7GQ1 *5, *6	
2	Long life replacement filter	Non-woven type	KAFP551K160	
3	Fresh air intake kit (20% fresh air)	Chamber type	KDDQ55B140 *7	
4	Sealing member of air discharge outlet		KDBHQ55B140 *7	
5	Sensor kit		BRYQ140A7	

CONTROL SYSTEM

	Item	Model	FCQHG71FVEB	FCQHG100FVEB
1-1	Remote controller	Infrared	BRC7FA532F *7	
		H/P	BRC1D528 *4	
		Wired	BRC1E51A *4	
			BRC1E52A / BRC1E52B	
1-2	Simplified remote controller (with operation mode selector button)		BRC2E52C *8	
1-3	Simplified remote controller (without operation mode selector button)		BRC3E52C *8	
2-1	Wiring adapter for electrical appendices (1)		KRP1BA57 *2 *7	
2-2	Wiring adapter for electrical appendices (2)		KRP4AA53 *2 *7	
2-3	Wiring adapter (hour meter)		EKR1C111 *2 *7	
3	Remote sensor		KRCS01-4B	
4	Installation box for adapter PCB		KRP1H98 *7	
5	Central remote controller		DCS302CA51	
6	Unified ON/OFF controller		DCS301BA51	
7	Electrical box with earth terminal (2 blocks)		KJB212AA	
8	Electrical box with earth terminal (3 blocks)		KJB311AA	
9	Schedule timer		DST301BA51	
10	Remote On/Off		EKROR02	
11	Digital input adaptor		BRP7A51 *9 *10	

- 1 All options are supplied as kit.
 *2 Installation box is necessary for these adapters
 *3 The BYCQ140D7W1W has white insulations.
 Be informed that formation of dirt on white insulations is visibly stronger and that it is consequently not advised to install the BYCQ140D7W1W decoration panel in environments exposed to concentrations of dirt.
 *4 Not recommended because of the limitation of the functions.
 5 To be able to control the BYCQ140D7GW1 the controller BRC1E is needed.
 *6 The BYCQ140D7GW1 is not compatible with Mini-VRV, Multi and Split Non-Inverter Outdoor units.
 *7 Option not available in combination with BYCQ140D7GW1.
 *8 Included languages are:
 Language pack - 1: English, German, French, Dutch, Spanish, Italian and Portuguese.
 With PC cable - EKPCCAB3 - in combination with the Updater PC software, you can additionally change the language to:
 Language pack - 2: English, Bulgarian, Croatian, Czech, Hungarian, Romanian and Slovenian.
 Language pack - 3: English, Greek, Polish, Russian, Serbian, Slovak and Turkish.
 *9 Only possible in combination with simplified remote control BRC2/3E52C.
 *10 Requires installation box for adaptor PCB.


3D077128A

5 Dimensional drawings

5 - 1 Dimensional Drawings with Accessories


FCQHG-F

with standard panel

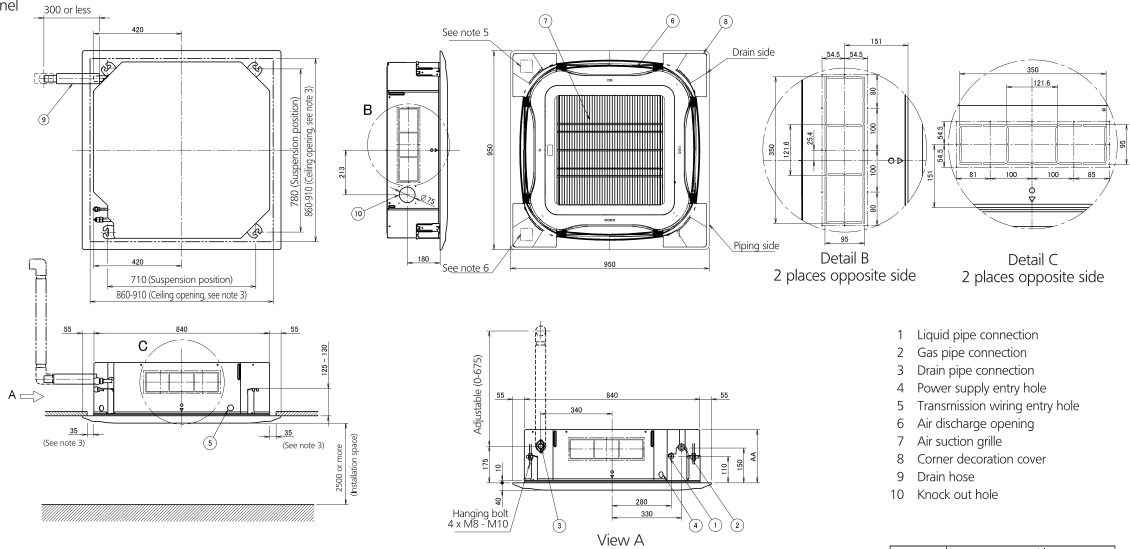

FCQHG-F

with auto-cleaning panel

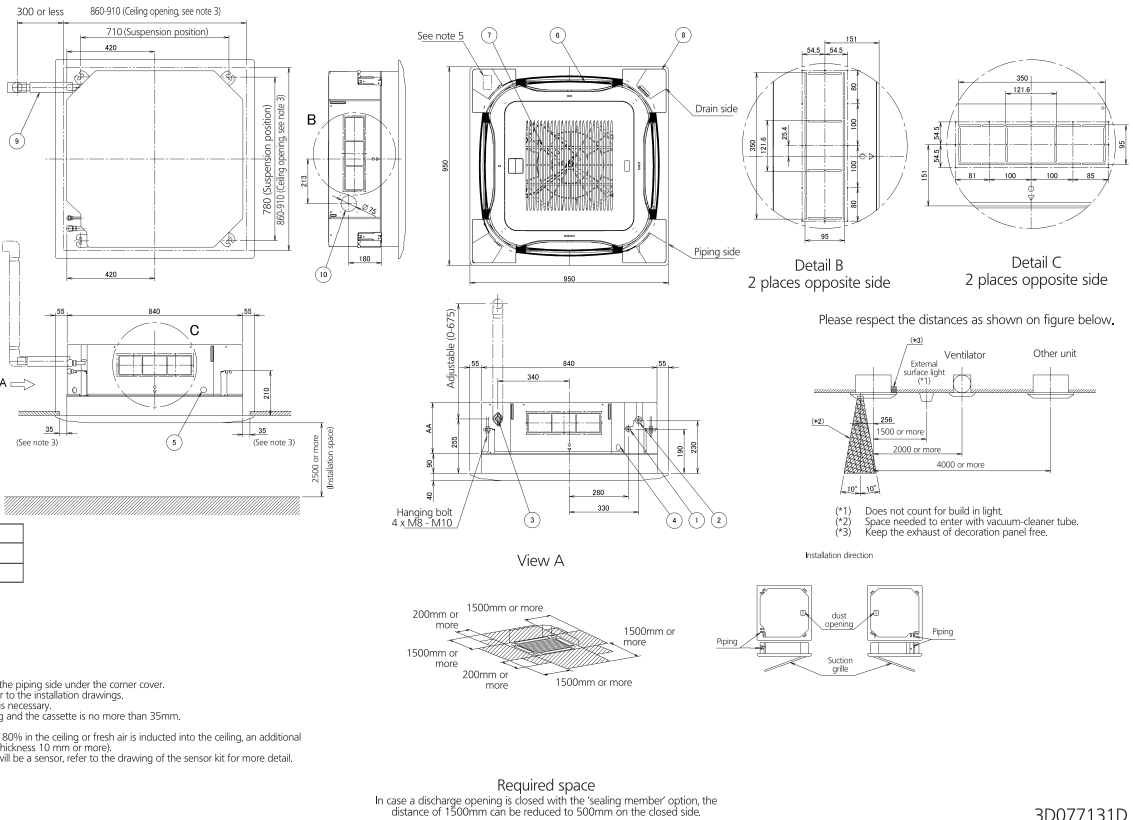


5 Dimensional drawings


5 - 1 Dimensional Drawings with Accessories

FCQHG-F


Remote controller dimensions

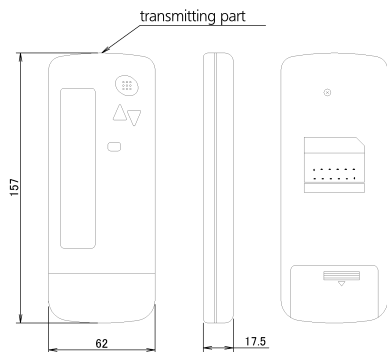

Remote controller holder Installation procedure (Installation to wall surface)



Receiver detail

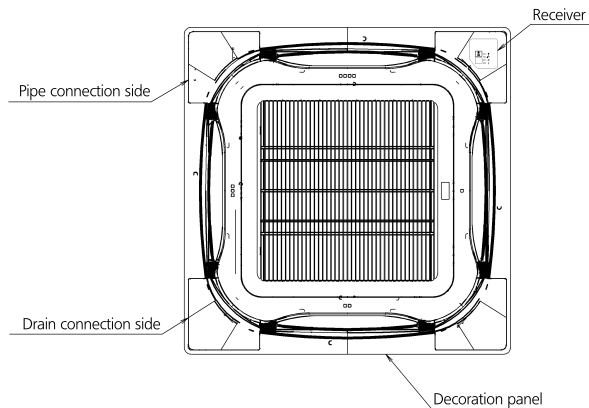


Sensor kit	Decoration panel
BRC7FA532F	BYCQ140D7W1(W)

3D077410

FCQHG-F

Sensor kit installation procedure

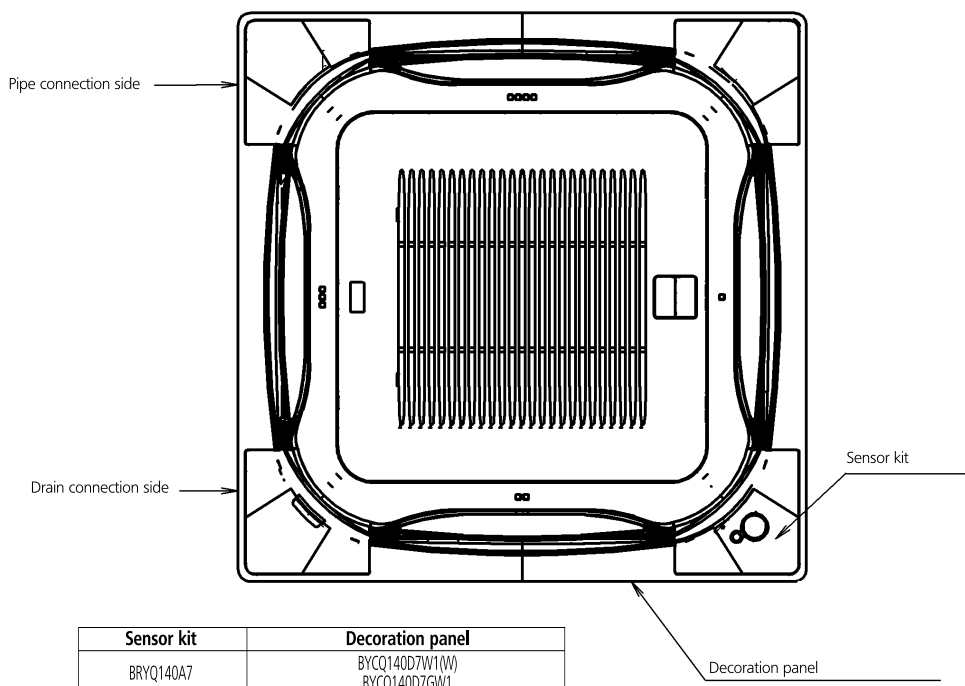


Sensor kit	Decoration panel
BRYQ140A7	BYCQ140D7W1(W) BYCQ140D7GW1

4D077409

5 Dimensional drawings

5 - 1 Dimensional Drawings with Accessories


FCQHG-F

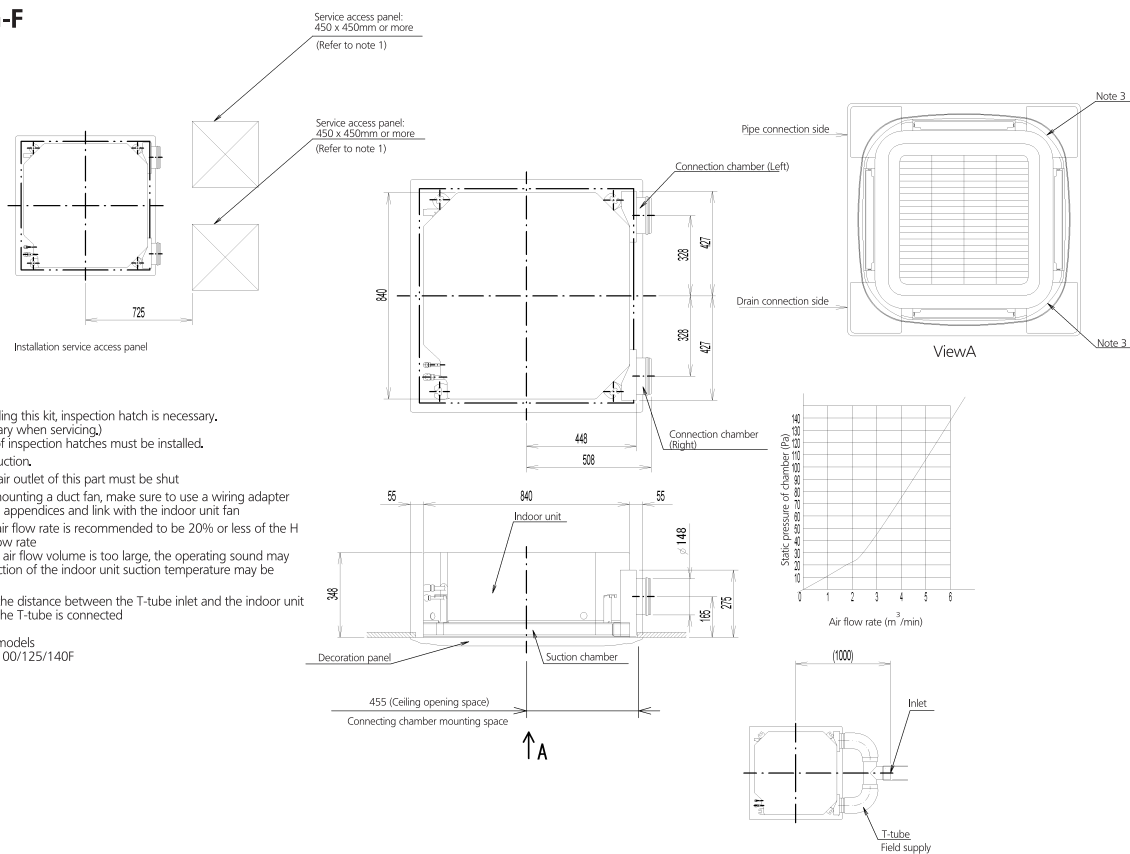

6 Centre of gravity

6 - 1 Centre of Gravity

FCQHG-F

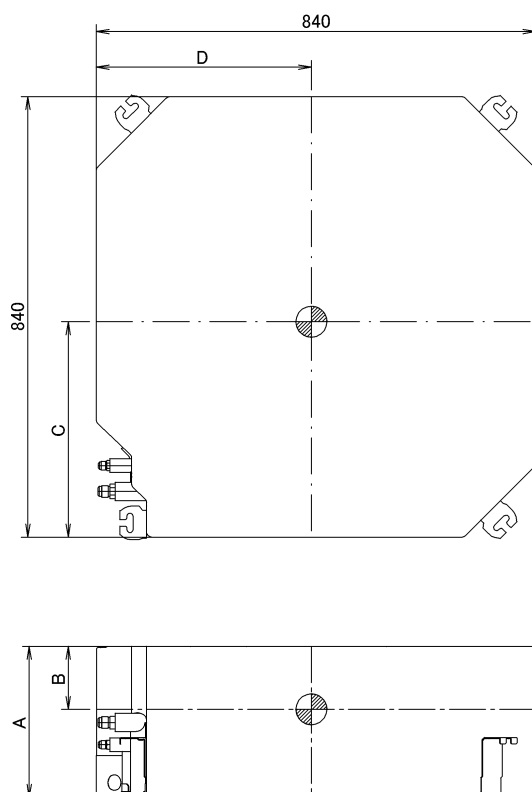

Model	A	B	C	D
FCQHG71~140FVEB	288	120	420	420

4D077032A


7 Piping diagrams

7 - 1 Piping Diagrams

FCQHG-F

Refrigerant flow
Cooling ———→
Heating - - - ->

Model	A	B
FCQHG71FVEB	9,52	15,9
FCQHG100FVEB		
FCQHG125FVEB		
FCQHG140FVEB		

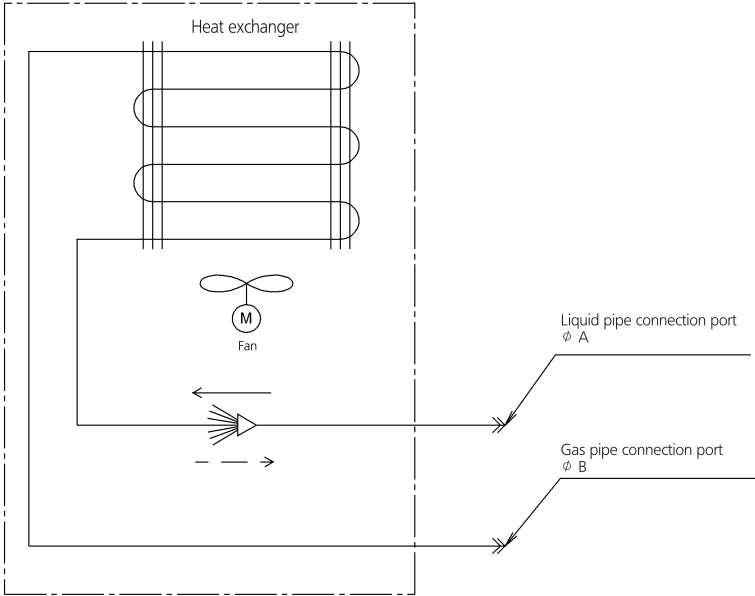


4D076993

8 Wiring diagrams

8 - 1 Wiring Diagrams - Single Phase


FCQHG-F

Indoor unit	
A1P	Printed circuit board
A2P	Printed circuit board
A3P	Printed circuit board
C21	Capacitor
C105	Capacitor
HAP	Light emitting diode (service monitor green)
M1F	Motor (indoor fan)
M1P	Motor (drain pump)
M1S-MS	Motor (swing flap)
R1T	Thermistor (air)
R2T-R3T	Thermistor (coil)
S1L	Heat switch
SS1	Selector switch (emergency)
V1R	Diode bridge
X1M	Terminal block
X2M	Terminal block
Z1C	Ferrite core (noise filter)
Q1B	Noise filter
PS	Power supply circuit
RC	Signal receiver circuit
TC	Signal transmission circuit
Wired remote controller	
R1T	Thermistor (air)
Receiver/display unit (Attached to infrared remote controller)	
A4P	Printed circuit board
A5P	Printed circuit board
BS1	Push button (on/off)
H1P	Light emitting diode (in-red)
H2P	Light emitting diode (time-green)
H3P	Light emitting diode (filter sign-red)
H4P	Light emitting diode (defrost-orange)
SS1	Selector switch (main/sub)
SS2	Selector switch (infrared address set)
Adaptor for wiring	
F1U	Fuse (C15A, 250V)
F2U	Fuse (C15A, 250V)
KCR	Magnetic relay
KFR	Magnetic relay
KHR	Magnetic relay (Hi)
Connector for optional parts	
X2A	Connector (Sensor kit)
X8A	Connector (Auto clean panel)
X24A	Connector (Infrared remote controller)
X33A	Connector (adaptor for wiring)
X35A	Connector (group control adaptor)
X36A	Connector (Auto clean panel)

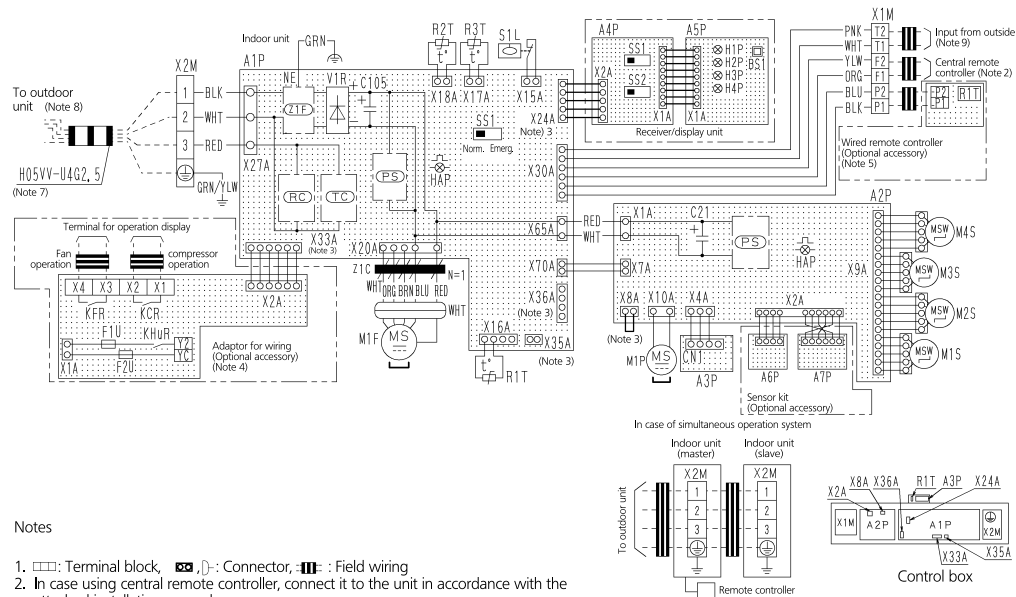

Notes


- : Terminal block, □□□□: Connector, □□□□: Field wiring
- In case using central remote controller, connect it to the unit in accordance with the attached installation manual.
- X2A, X8A, X33A, X35A, X36A are connected when the optional accessories are being used. In case of using an auto clean panel, see the wiring diagram of it.
- Connect power of adaptor for wiring to terminal block (X2M) of indoor unit directly.
- In case of main/sub overcharge, see the installation manual attached to remote controller.
- Symbols show as follows: RED:Red BLK:Black WHT:White YLW:Yellow GRN:Green ORG:Orange BRN:Brown PNK:Pink GRY:Grey BLU:Blue.
- Shows only in case of protected pipes, use HO7RN-F in case of no protection.
- For the detail, see wiring diagram attached to outdoor unit.
- When connecting the input wires from outside, forced OFF or ON/OFF control operation can be selected by the remote controller. See installation manual for more details.

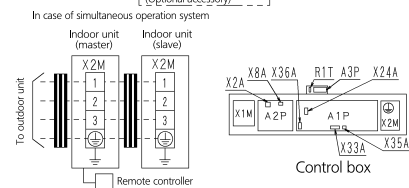

3D074345

9 External connection diagrams

9 - 1 External Connection Diagrams

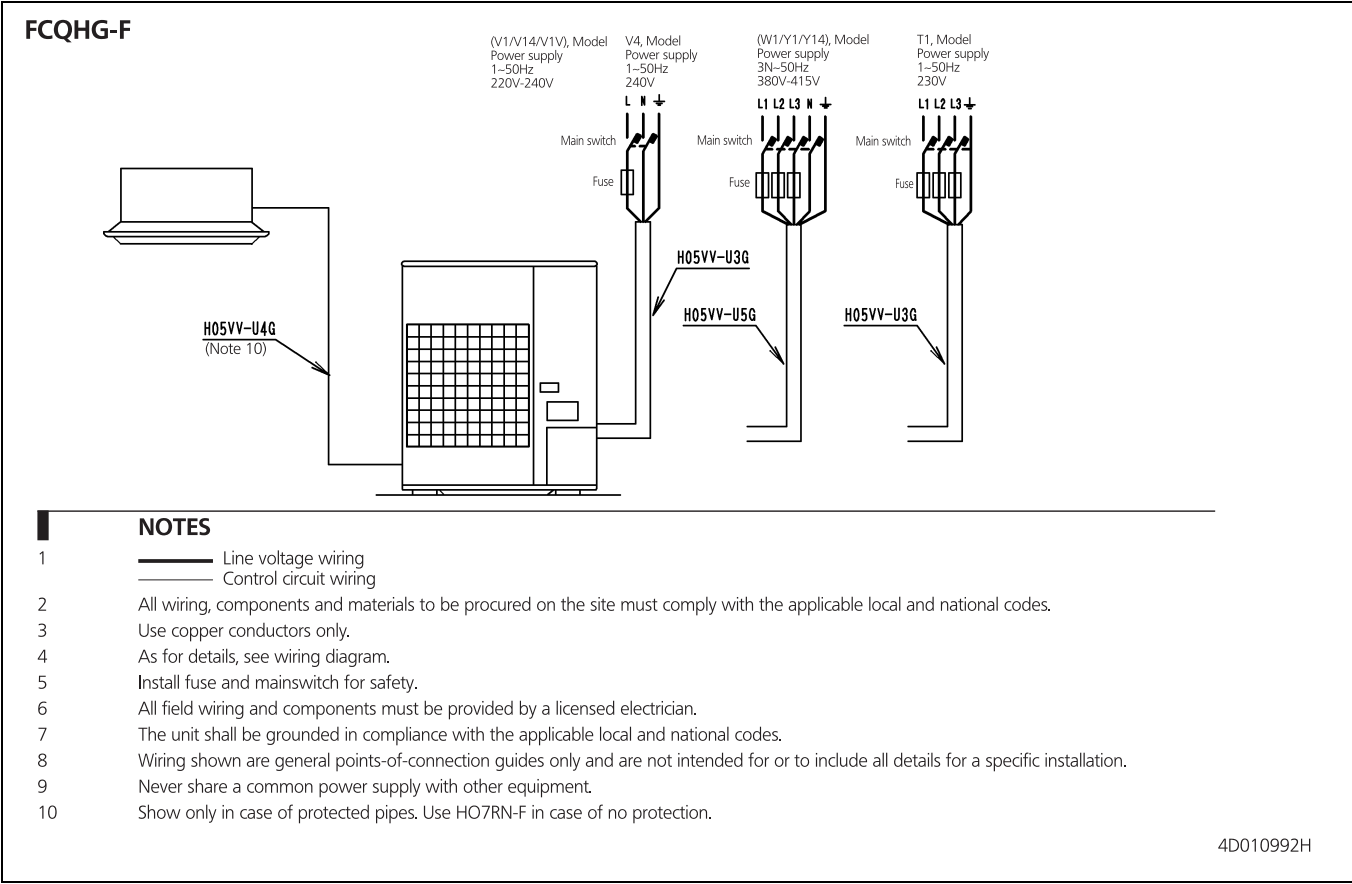


10 Sound data

10 - 1 Sound Pressure Spectrum

FCQHG-F

Max fresh air intake volume table

The rise of operating sound with fresh air intake kit

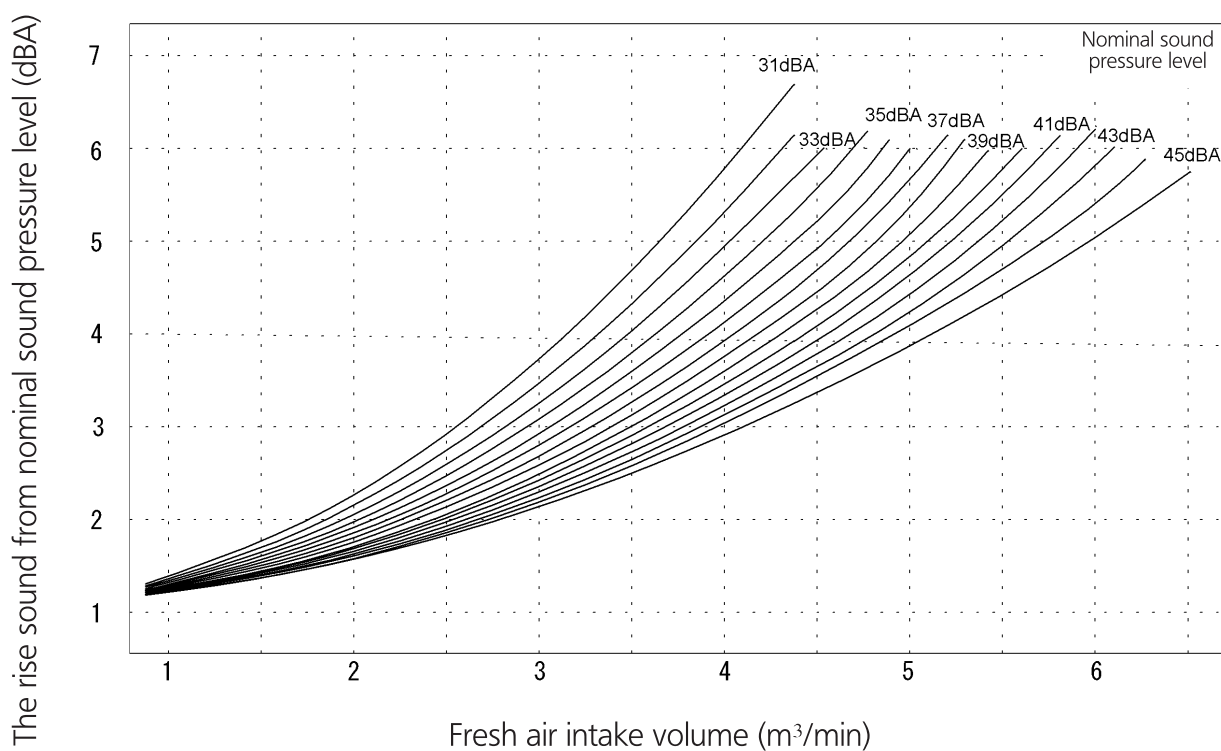

The maximum intake air flow volume is following table.

If the intake air flow volume is too large, the operating sound may rise or detection of the indoor unit suction temperature may be affected.



FCQHG-F	71	100	125	140
Max fresh air intake volume (m ³ /min.)	4.2	6.4	6.7	6.7

4D082223

10 Sound data

10 - 1 Sound Pressure Spectrum

FCQHG71F

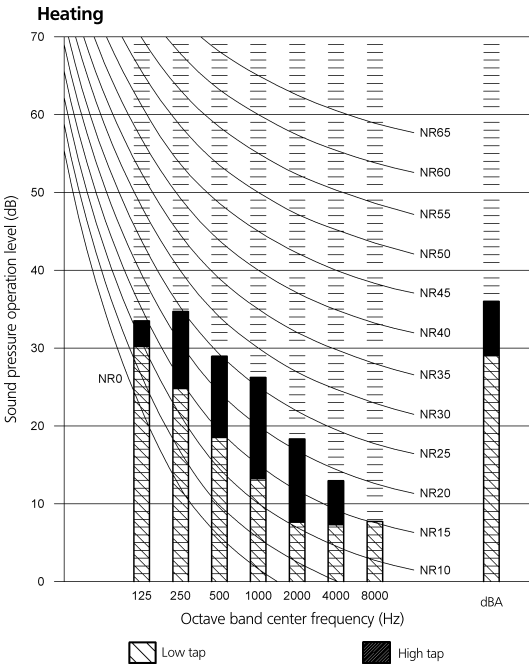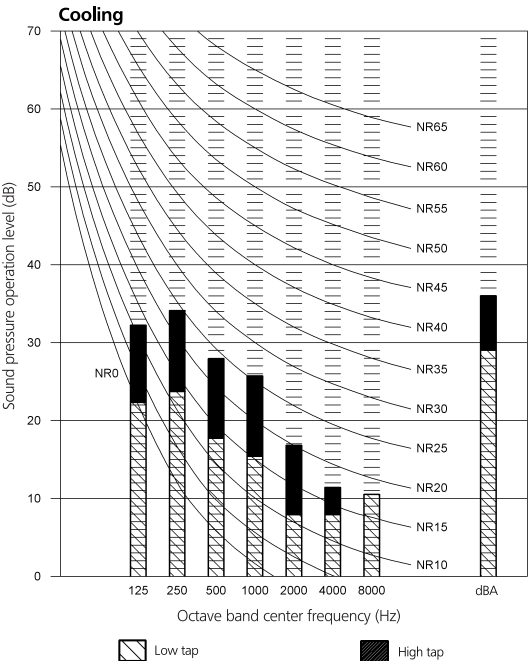



NOTES

- 1 Data is valid at free field condition.
- 2 Data is valid at nominal operation condition.
- 3 dBA = A-weighted sound pressure level (A-scale according to IEC).
- 4 Reference acoustic pressure 0dB = 20μPa.
- 5 Curve for FCQHG71FVEB in cooling/heating mode.
- 6 Sound power level:

High tap
53 dB

3D077515

FCQHG100F

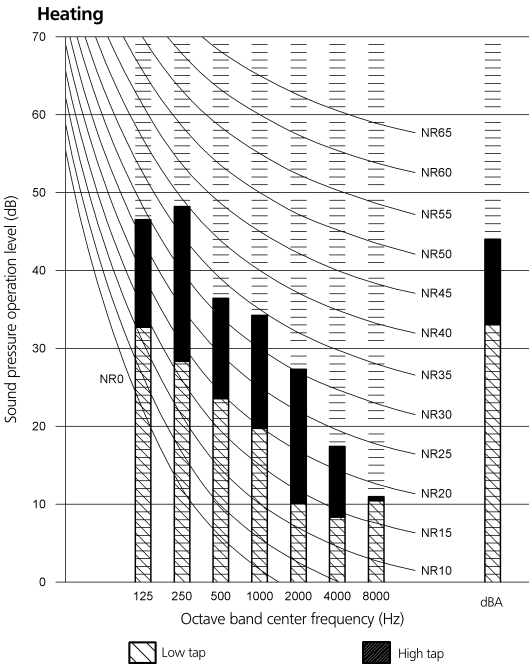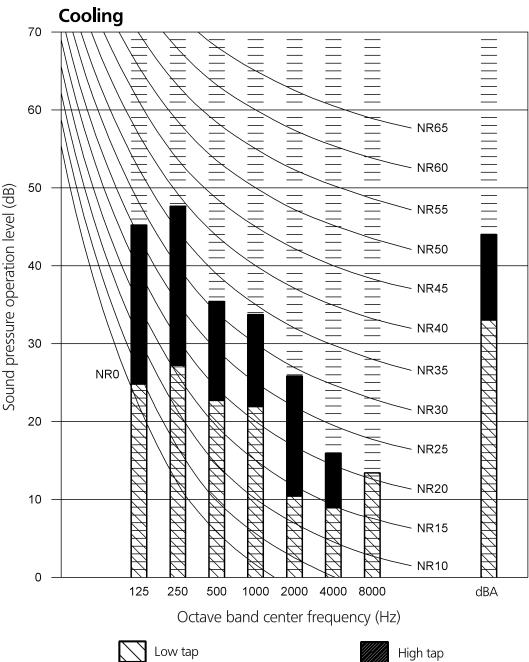

NOTES

- 1 Data is valid at free field condition.
- 2 Data is valid at nominal operation condition.
- 3 dBA = A-weighted sound pressure level (A-scale according to IEC).
- 4 Reference acoustic pressure 0dB = 20μPa.
- 5 Curve for FCQHG100FVEB in cooling/heating mode.
- 6 Sound power level:

High tap
61 dB



3D077516

10 Sound data

10 - 1 Sound Pressure Spectrum

10

FCQHG125F

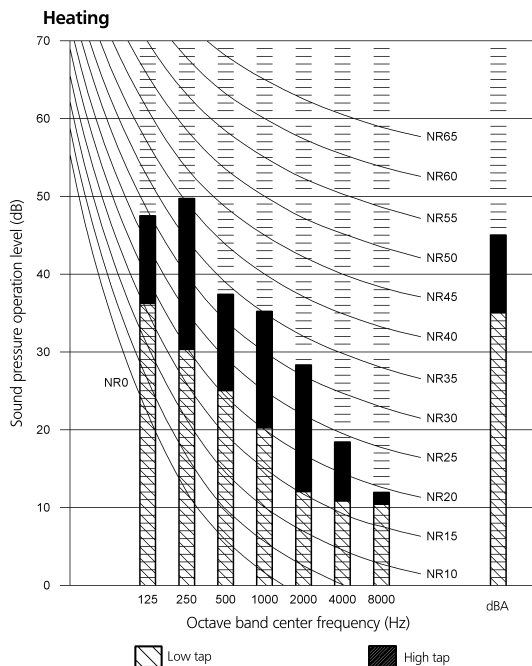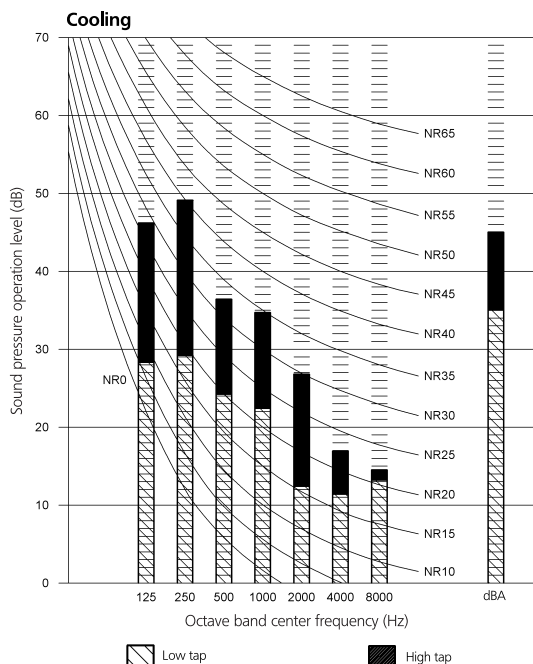



NOTES

- 1 Data is valid at free field condition.
- 2 Data is valid at nominal operation condition.
- 3 dBA = A-weighted sound pressure level (A-scale according to IEC).
- 4 Reference acoustic pressure 0dB = 20μPa.
- 5 Curve for FCQHG125FVEB in cooling/heating mode.
- 6 Sound power level:

High tap
61 dB

3D077517

FCQHG140F

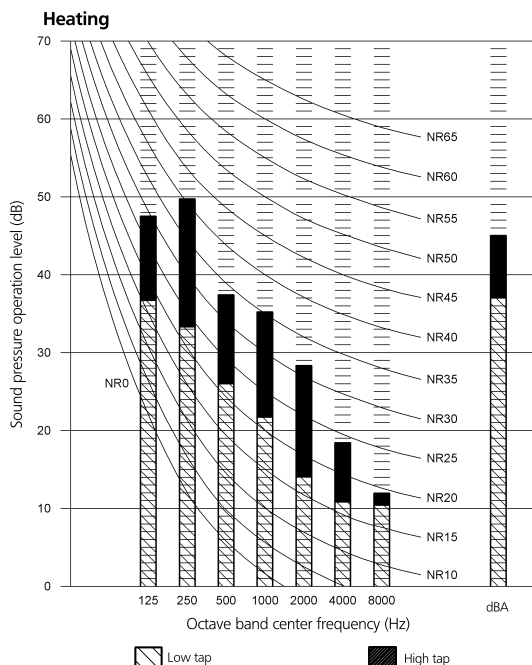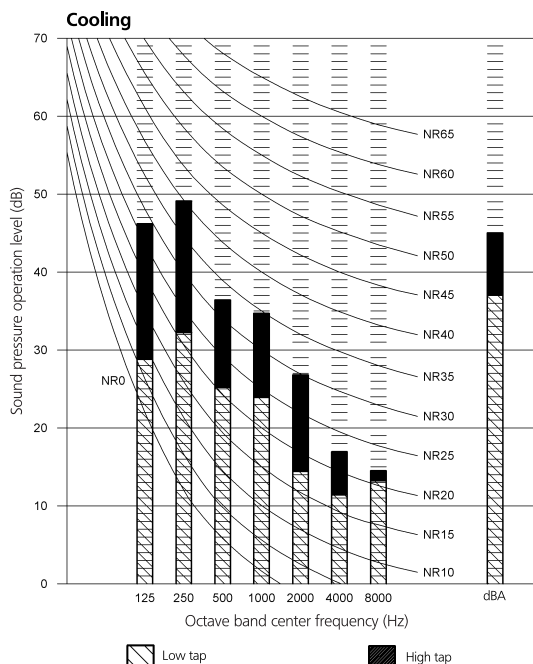

NOTES

- 1 Data is valid at free field condition.
- 2 Data is valid at nominal operation condition.
- 3 dBA = A-weighted sound pressure level (A-scale according to IEC).
- 4 Reference acoustic pressure 0dB = 20μPa.
- 5 Curve for FCQHG140FVEB in cooling/heating mode.
- 6 Sound power level:

High tap
61 dB

3D077518


11 Air flow patterns

11 - 1 Air Flow Pattern - Cooling

FCQHG71F


Cooling air velocity distribution

All round air discharge, air flow direction: horizontal

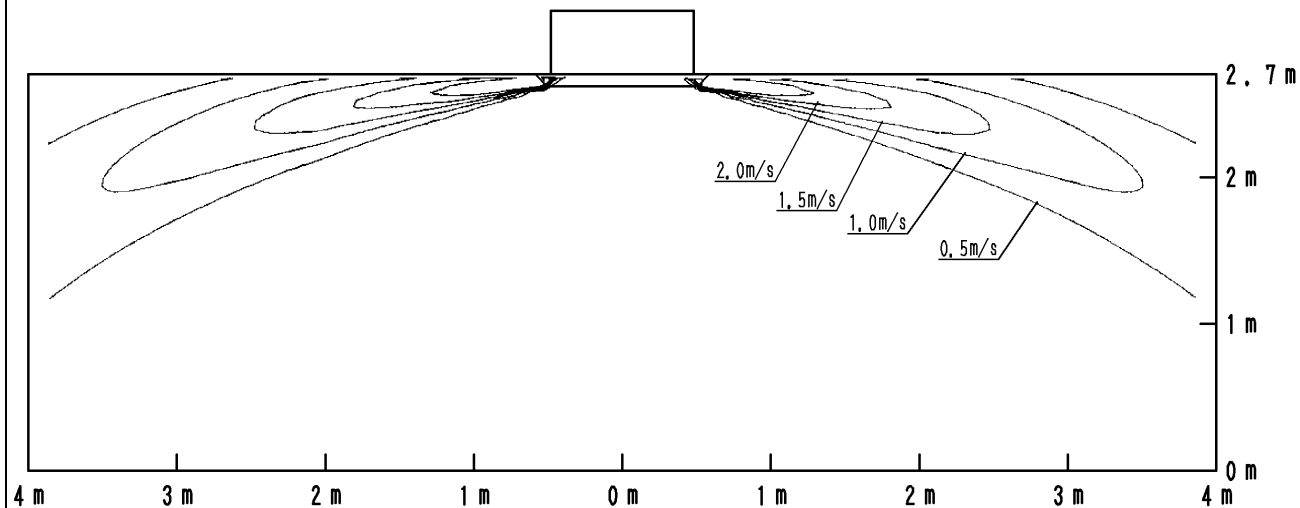

Cooling air temperature distribution

All round air discharge, air flow direction: horizontal

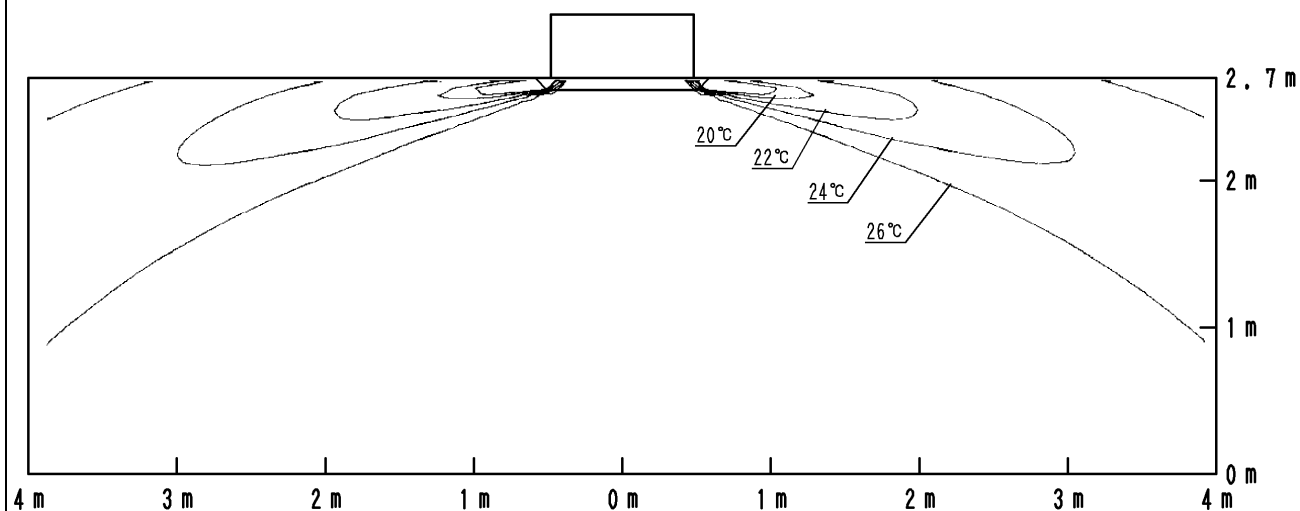

4D077060


11 Air flow patterns

11 - 1 Air Flow Pattern - Cooling

FCQHG100F


Cooling air velocity distribution

All round air discharge, air flow direction: horizontal

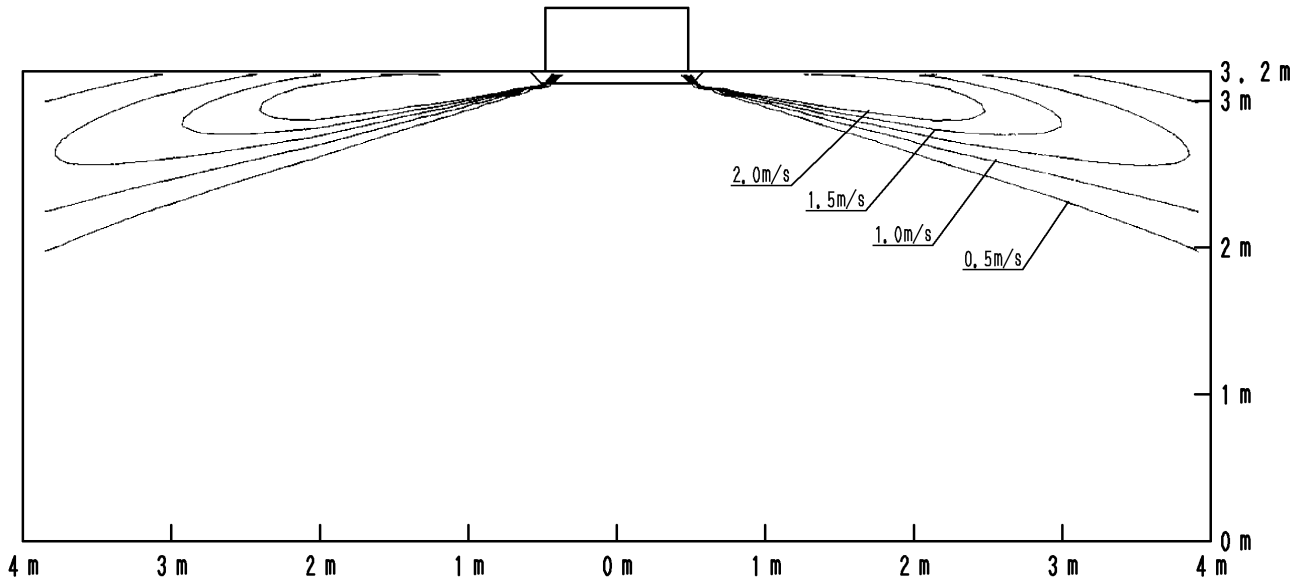

Cooling air temperature distribution

All round air discharge, air flow direction: horizontal

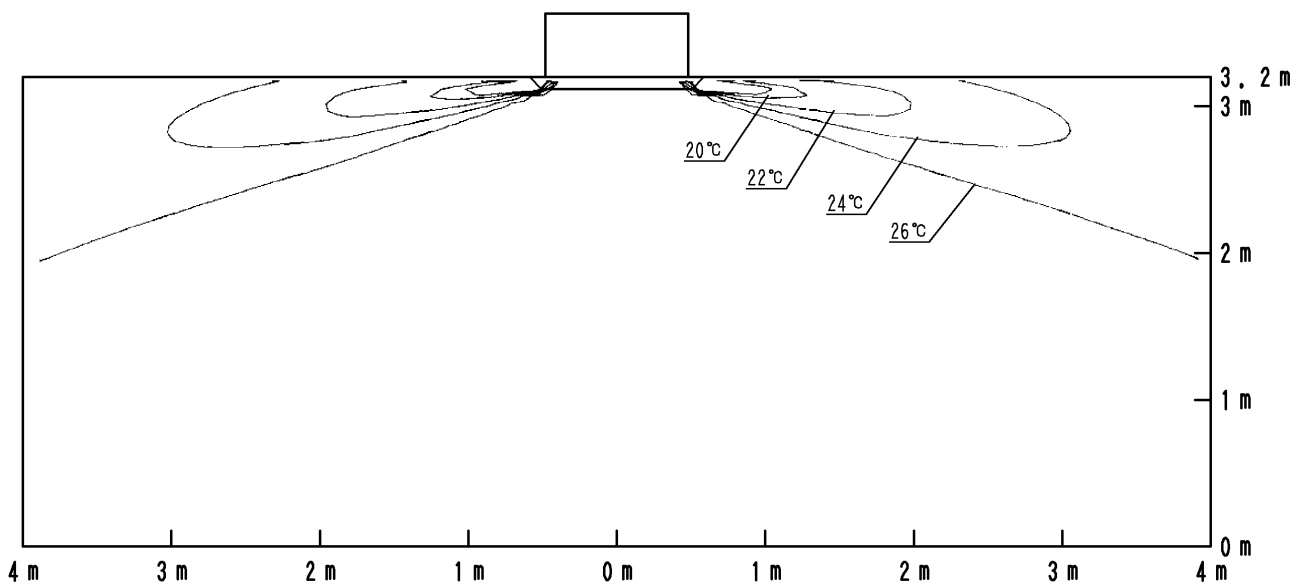

4D077061


11 Air flow patterns

11 - 1 Air Flow Pattern - Cooling

FCQHG125F


Cooling air velocity distribution

All round air discharge, air flow direction: horizontal

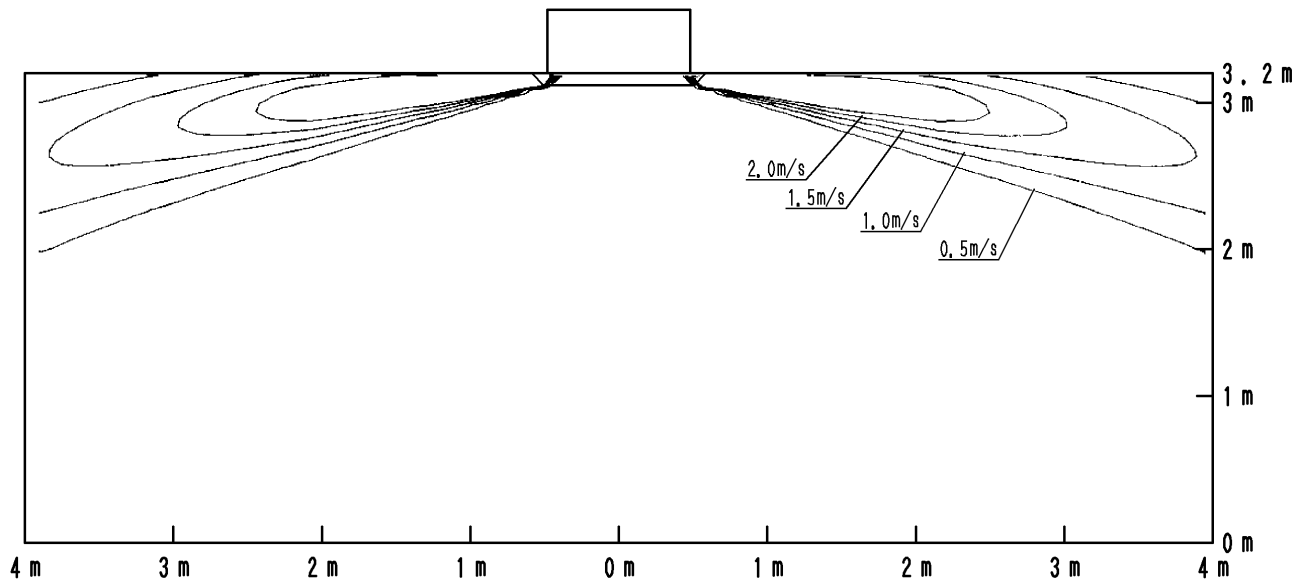

Cooling air temperature distribution

All round air discharge, air flow direction: horizontal

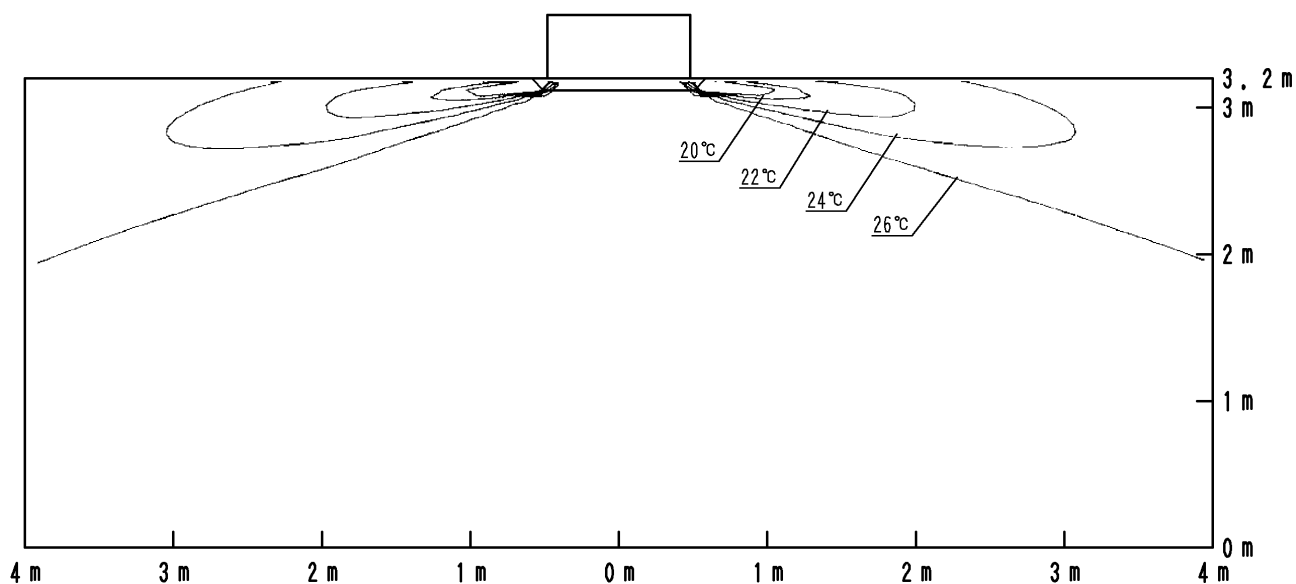

4D077062


11 Air flow patterns

11 - 1 Air Flow Pattern - Cooling

FCQHG140F


Cooling air velocity distribution

All round air discharge, air flow direction: horizontal

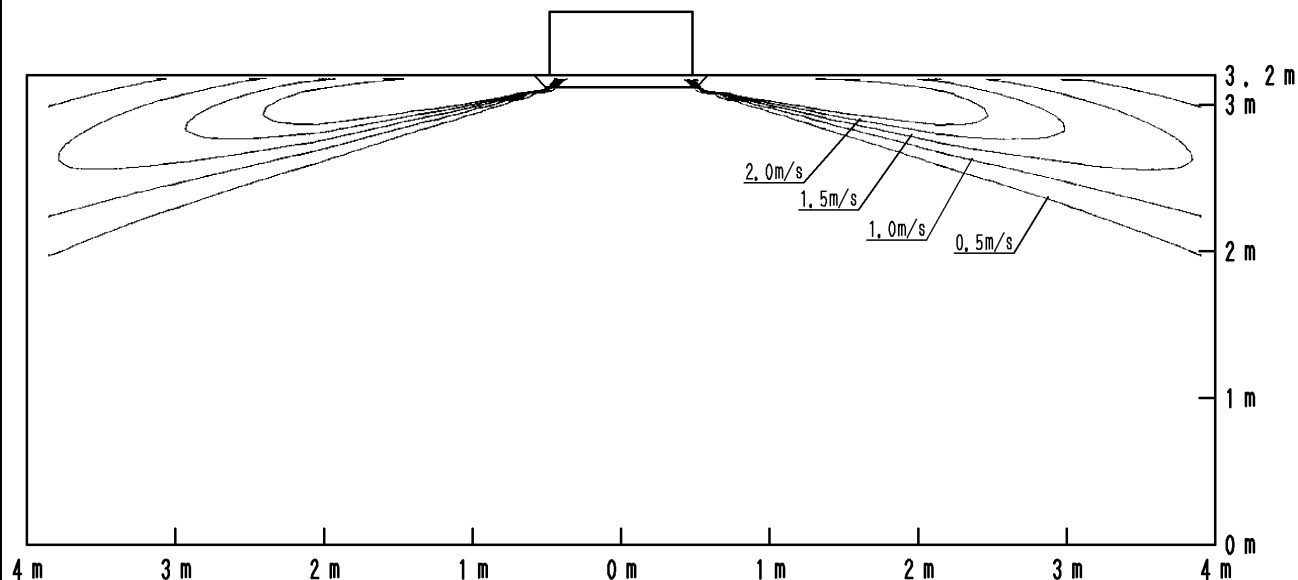

Cooling air temperature distribution

All round air discharge, air flow direction: horizontal

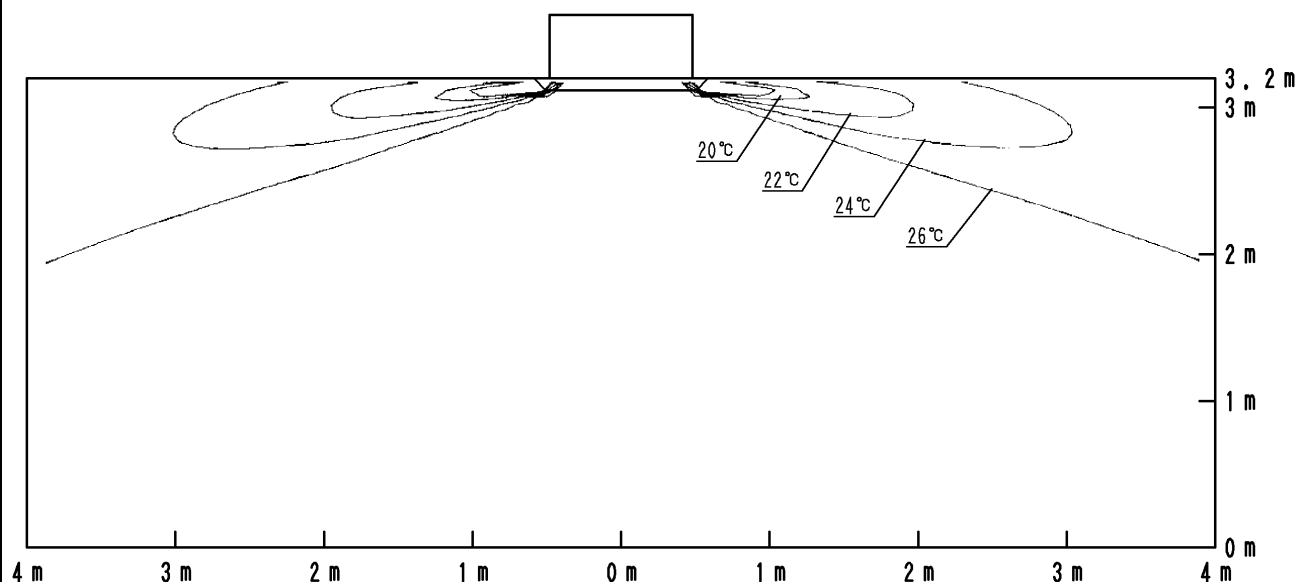

4D077063A


11 Air flow patterns

11 - 2 Air Flow Pattern - Heating

FCQHG71F


Heating air velocity distribution

All round air discharge, air flow direction: horizontal

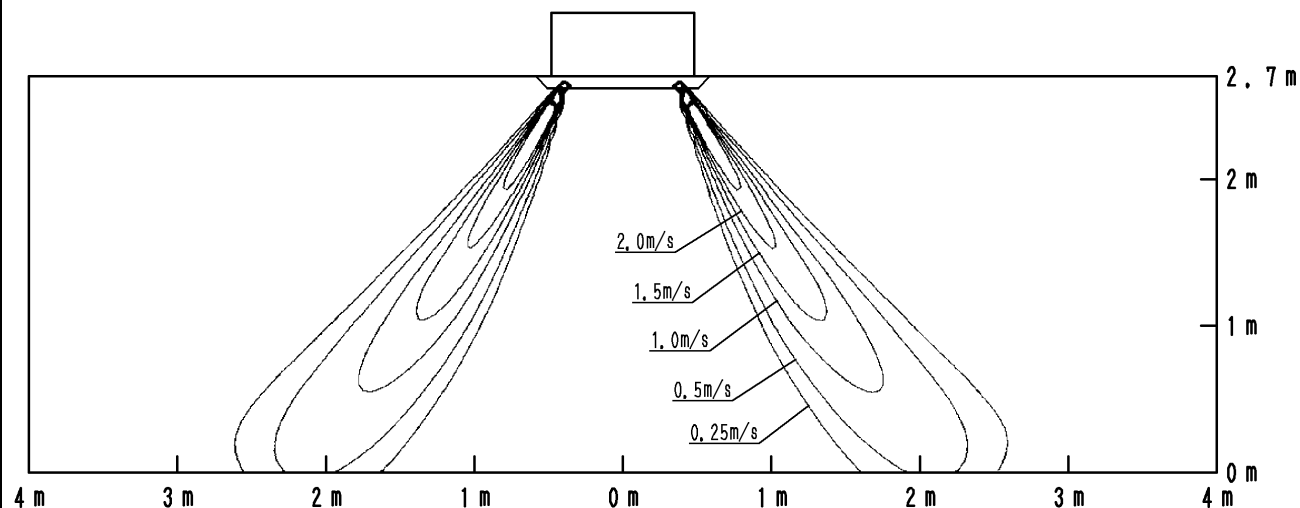

Heating air temperature distribution

All round air discharge, air flow direction: horizontal

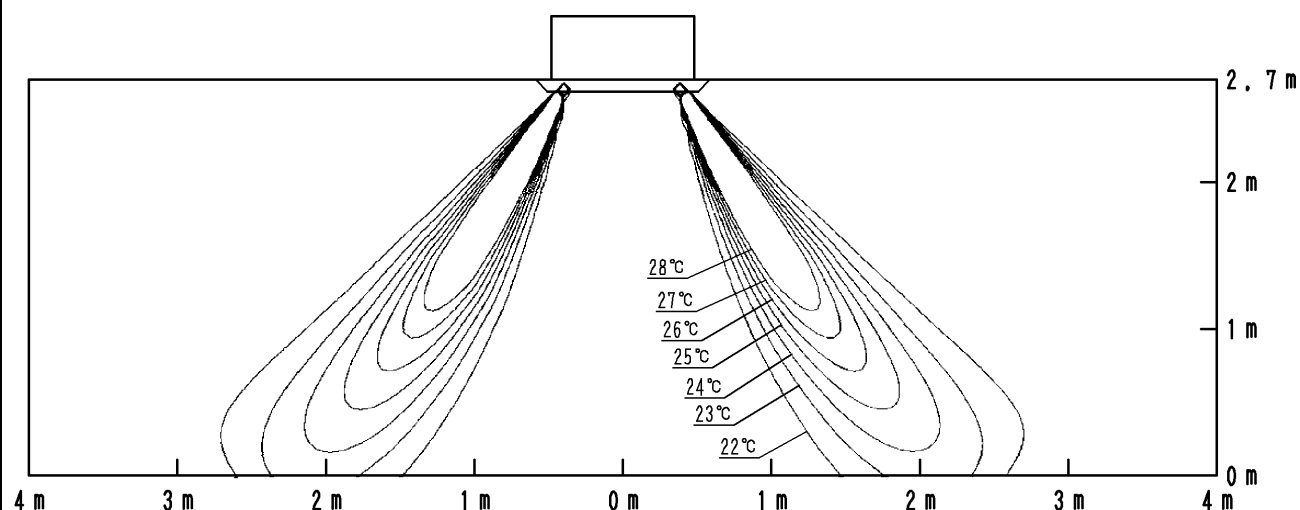

4D077049


11 Air flow patterns

11 - 2 Air Flow Pattern - Heating

FCQHG100F


Heating air velocity distribution

All round air discharge, air flow direction: horizontal

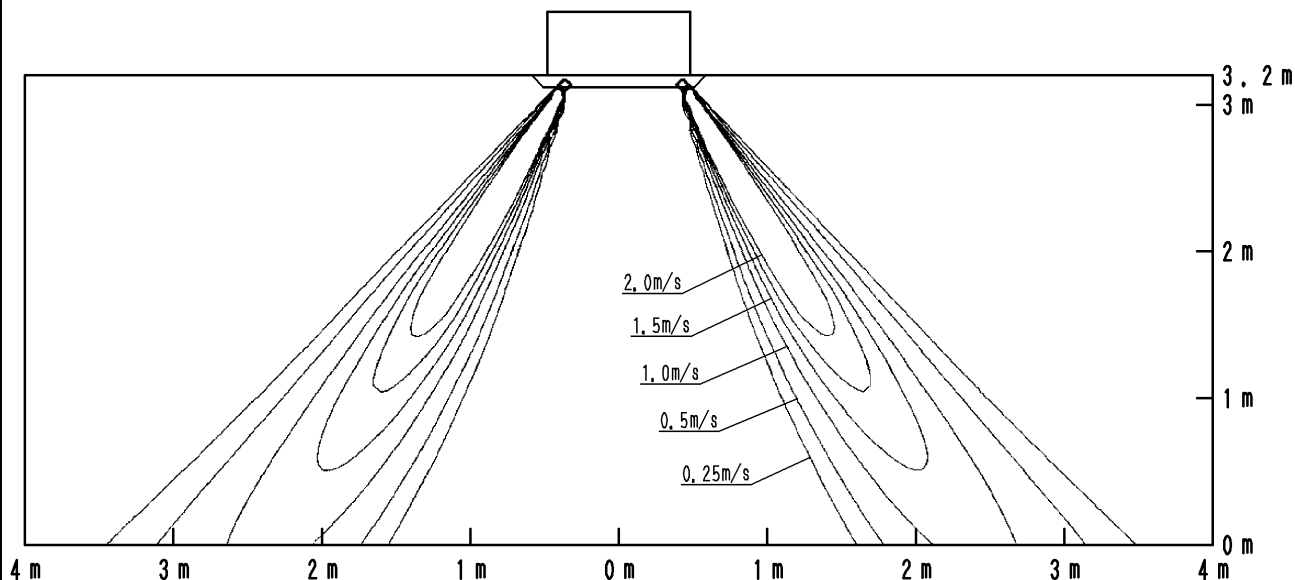

Heating air temperature distribution

All round air discharge, air flow direction: horizontal

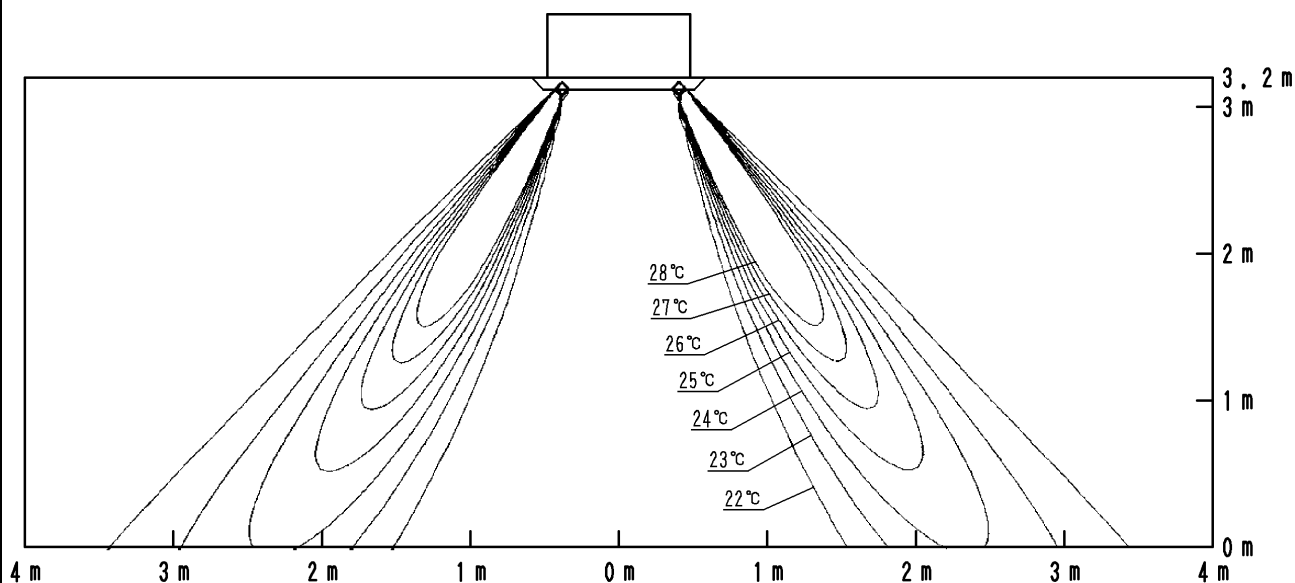

4D077050


11 Air flow patterns

11 - 2 Air Flow Pattern - Heating

FCQHG125F


Heating air velocity distribution

All round air discharge, air flow direction: horizontal

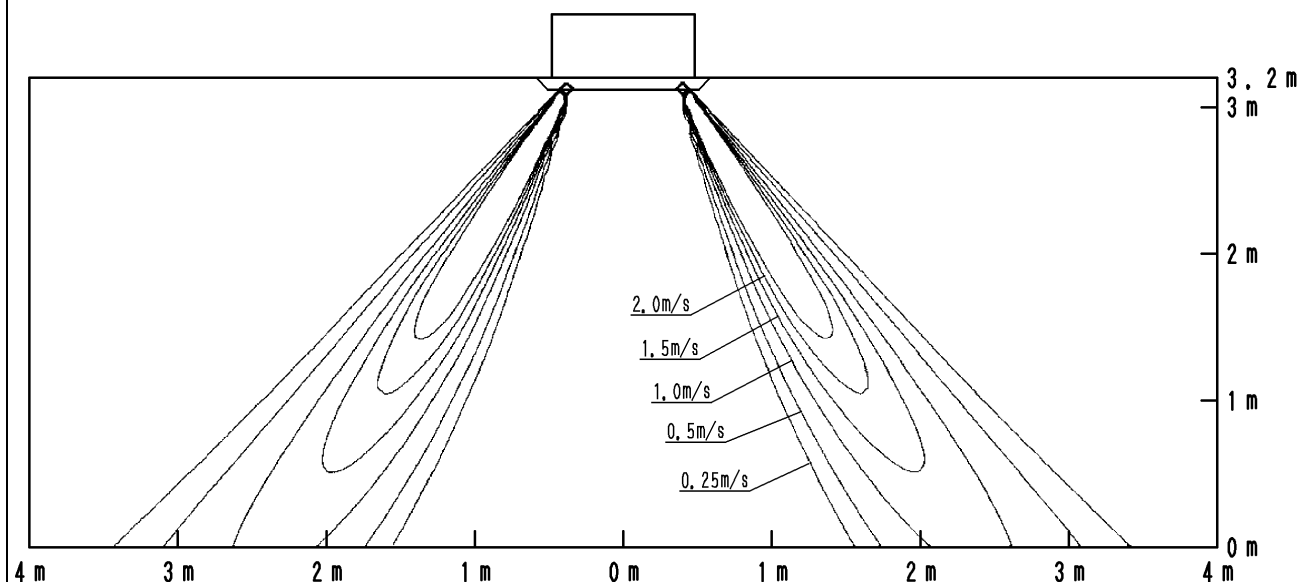

Heating air temperature distribution

All round air discharge, air flow direction: horizontal

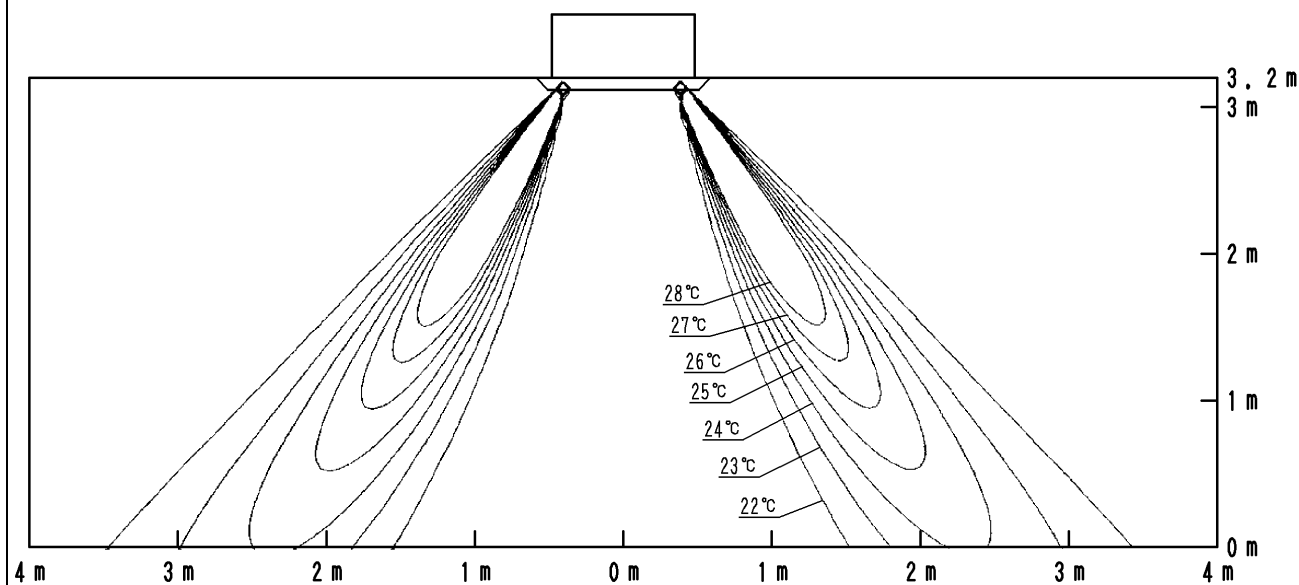

4D077051


11 Air flow patterns

11 - 2 Air Flow Pattern - Heating

FCQHG140F


Heating air velocity distribution

All round air discharge, air flow direction: horizontal

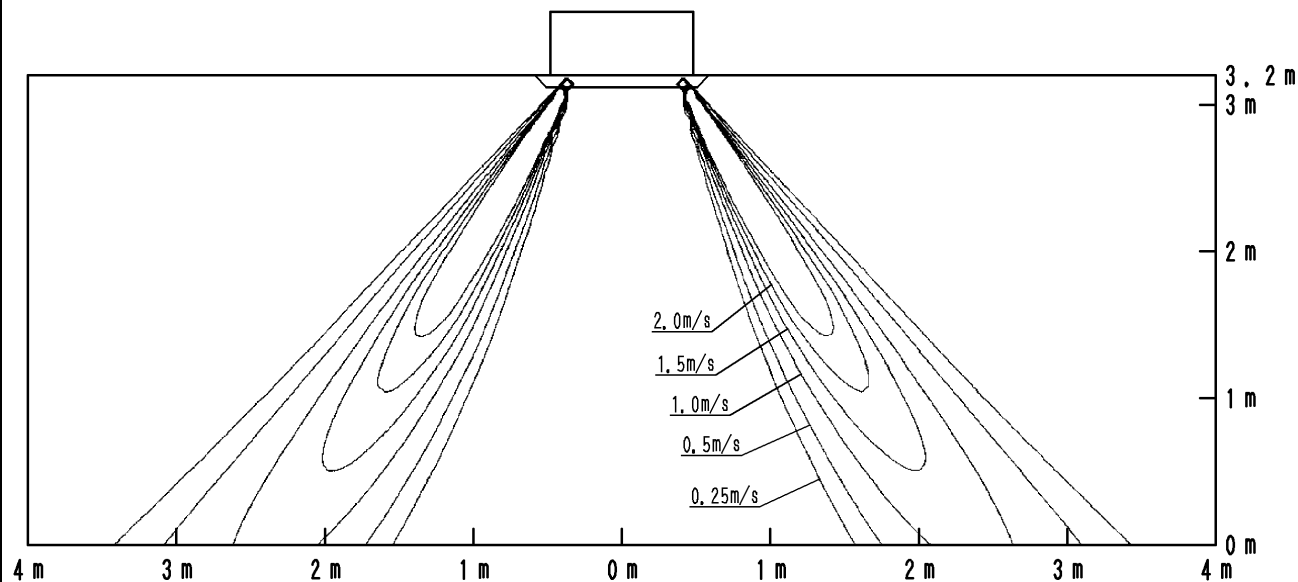

Heating air temperature distribution

All round air discharge, air flow direction: horizontal

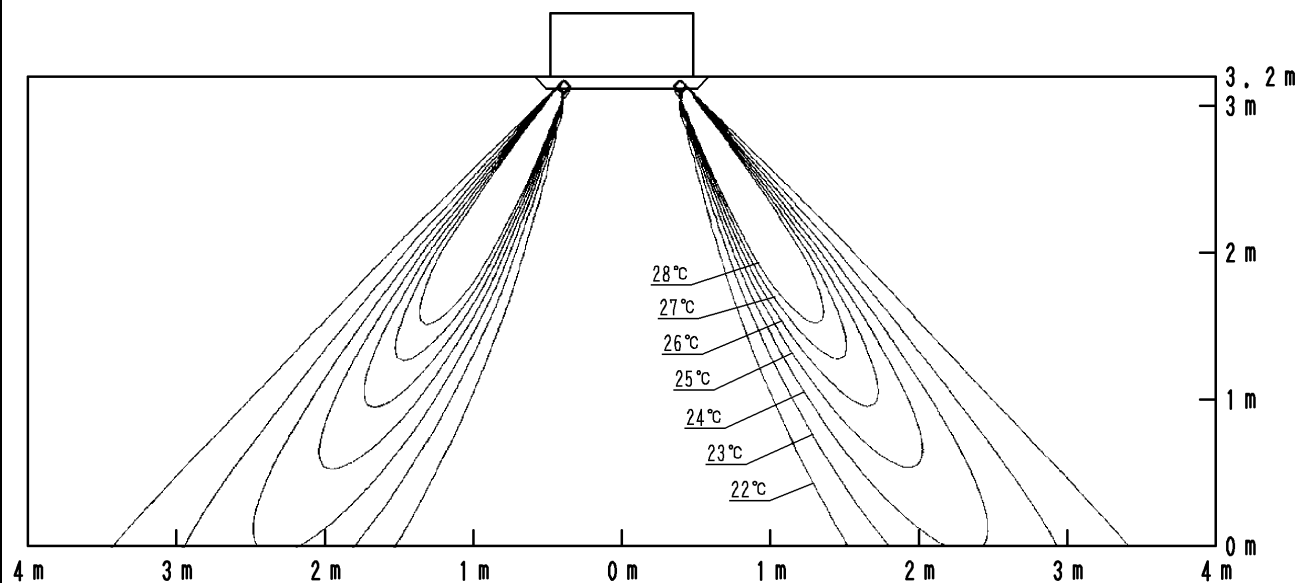

4D077052A



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU) and Fan coil units (FCU). Check on-going validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.

BARCODE

Daikin products are distributed by: