




FLXS-B / RXS-B

Flexi type unit



- Can be fitted on either ceiling or lower part of wall (e.g. beneath a window)
- Consumes up to 30% less energy than non-inverter units
- Washable grille
- Achieves set temperature more quickly
- Automatic air flow director ensures uniform air flow and temperature distribution
- Home leave operation saves energy during absence

- Air purification and photocatalytic deodorising filter
- Powerful mode can be selected for rapid cooling and/or heating
- Indoor unit silent operation
- Outdoor unit silent operation
- Night quiet mode (only in multi application + cooling mode)

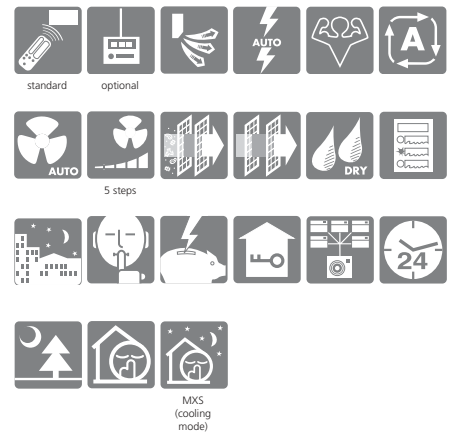

HEAT PUMP

DC-INVERTER

INDOOR UNIT			FLXS25BVMB	FLXS35BVMB	FLXS50BVMB
Cooling capacity	min ~ nom ~ max	kW	1.00 ~ 2.50 ~ 3.00	1.00 ~ 3.50 ~ 3.70	0.90 ~ 4.90 ~ 5.30
Heating capacity	min ~ nom ~ max	kW	1.00 ~ 3.40 ~ 5.00	1.00 ~ 4.50 ~ 5.00	0.90 ~ 6.10 ~ 7.50
Nominal input	cooling	min ~ nom ~ max	0.24 ~ 0.715 ~ 0.925	0.24 ~ 1.22 ~ 1.30	0.45 ~ 1.72 ~ 1.95
	heating	min ~ nom ~ max	0.24 ~ 0.94 ~ 1.43	0.24 ~ 1.38 ~ 1.83	0.31 ~ 1.82 ~ 3.54
EER	cooling		3.50	2.87	2.85
COP	heating		3.62	3.26	3.35
Energy label	cooling		A	C	C
	heating		A	C	C
Annual energy consumption		kWh	3575	610	860
Dimensions	HxWxD	mm		490x1,050x200	
Weight		kg		16	17
Air flow rate (H/L/S/L)	cooling	m ³ /min	7.6/6.0/5.2	8.6/6.6/5.6	11.4/8.5/7.5
	heating	m ³ /min	9.2/7.4/6.6	9.8/8.0/7.2	12.1/7.5/6.8
Sound pressure level (H/L/S/L)	cooling	dB(A)	37/31/28	38/32/29	47/39/36
	heating	dB(A)	37/31/29	39/33/30	46/35/33
Sound power level (H)	cooling	dB(A)	53	54	63
Refrigerant type				R-410A	
Power supply				1 ~, 220-240/220-230V, 50/60Hz	
Infrared remote control				ARC433A5	

Notes: 1) Energy label: scale from A (most efficient) to G (less efficient).
 2) The Energy Label Directive 2002/31/EC will enter into force once the relevant measurement standard will be published in the European Official Standard.
 3) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT			RXS25BVMB	RXS35BVMB	RXS50BVMB
Dimensions	HxWxD	mm	560x695x265		735x825x300
Weight		kg	37		49
Sound pressure level (H/L)	cooling	dB(A)	46/43	47/44	47*
	heating	dB(A)	47/44	48/45	48*
Sound power level (H)	cooling	dB(A)	59	60	63
	heating	dB(A)			
Operation range	cooling	from ~ to	°CDB	-10 ~ 46	
	heating	from ~ to	°CWB	-15 ~ 20	-15 ~ 18
Refrigerant type				R-410A	
Power supply				1 ~, 220-240/220-230V, 50/60Hz	

* This information was not available at the time of publication.