



FTKS-D / RKS-D CTKS-D/MKS-D

Wall mounted unit

NEW


FTKS20,25,35DVMW

RKS20,25,35D



- Flat front panel: stylish appearance and more easy to clean
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- ECONO mode decreases the power consumption so that other appliances that need large power consumption can be used. This function is also energy saving.
- Achieves set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor automatically saves power consumption in unoccupied rooms

- Dual air discharge flow for better air distribution
- COMFORT mode reassures draught free operation
- Titanium apatite photocatalytic air purification filter: this filter absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses
- Powerful mode can be selected for rapid cooling
- Indoor unit silent operation
- Outdoor unit silent operation
- Night quiet mode (only in multi application + cooling mode)

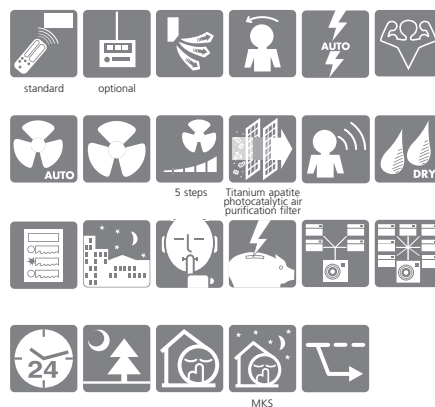

COOLING ONLY

INVERTER

INDOOR UNIT (air cooled)			FTKS20DVMW/L	FTKS25DVMW/L	FTKS35DVMW/L	CTKS50DVMW/L	
Cooling capacity	min~nom~max	kW	13~2.0~2.6	13~2.5~3.0	14~3.4~3.8	For more detailed information about capacities, power input, EER, Energy label and annual energy consumption, please refer to our Multi Model catalogue/combination tables or check with your local dealer.	
Nominal input	min~nom~max	kW	0.30~0.49~0.83	0.30~0.685~0.96	0.30~1.045~1.27		
EER			4.08	3.62	3.24		
Energy label			A	A	A		
Annual energy consumption	cooling	kWh	245	343	523		
Dimensions	HxWxD	mm		283x800x195			283x800x195
Weight		kg	9	9	9		9
Air flow rate	H/U/SL	m ³ /min	8.7/4.7/3.9	8.7/4.7/3.9	8.9/4.9/4.0		11.4/7.1/6.2
Sound pressure level	H/U/SL	dB(A)	38/25/22	38/25/22	39/26/23		46/35/32
Sound power level	H	dB(A)	56	56	57		64
Refrigerant type			R-410A			R-410A	
Power supply	VM		1~, 220-240/220-230V, 50/60Hz			1~, 220-240/220-230V, 50/60Hz	
Infrared remote control			ARC433A43			ARC433A43	

Notes: 1) Energy label: scale from A (most efficient) to G (less efficient).
 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).
 3) The Energy Label Directive 2002/31/EC will enter into force once the relevant measurement standard will be published in the European Official Standard.

OUTDOOR UNIT			RKS20DVMB	RKS25DVMB	RKS35DVMB	4MKS58,75,90,DVMB
Dimensions	HxWxD	mm	550x765x285			
Weight		kg	30			32
Sound pressure level	H/L	dB(A)	46/43	46/43	47/44	Multi application only. For more specifications, please refer to page 98 of this catalogue.
Sound power level	H	dB(A)	61	61	62	
Operation range		°CDB	-10~46			
Refrigerant type			R-410A			
Power supply	VM		1~, 220-240/220-230V, 50/60Hz			