



FTKS-DL / RKS-E

Wall mounted unit



ARC433A43




FTKS20,25,35D3VML



RKS20,25,35E

- Flat front panel: its stylish appearance blends easily within any interior décor and is more easy to clean.
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- ECONO mode decreases power consumption so that other appliances that need large power supply can be used
- Energy saving
- Reaches set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor saves power consumption in unoccupied rooms
- Dual air discharge flow for better air distribution
- Comfort mode for draught free operation
- Titanium apatite photocatalytic air purification filter absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses
- Powerful mode can be selected for rapid cooling
- Indoor / outdoor unit silent operation
- Night quiet mode (only in multi application and cooling only mode)

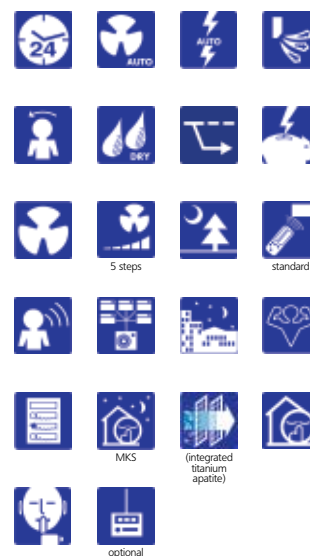

COOLING ONLY

INVERTER

Indoor Units				FTKS20D3VML	FTKS25D3VML	FTKS35D3VML
Nominal Capacity	Cooling capacity	Minimum	kW	1.2	1.2	1.2
		Standard	kW	2.0	2.5	3.4
		Maximum	kW	2.6	3.0	3.8
EER	Nominal		4.17	4.17	3.40	
Annual energy consumption		kWh	240	300	500	
Energy Label	cooling		A	A	A	
Dimensions	(Height x Width x Depth)	mm	283x800x195	283x800x195	283x800x195	
Weight		kg	9.0	9.0	9.0	
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.7 / 6.7 / 4.7 / 3.9	8.7 / 6.7 / 4.7 / 3.9	8.9 / 6.9 / 4.8 / 4.0
Sound Power	Cooling	High	dBA	56.0	56.0	57.0
Sound Pressure	Cooling	H/L/SL	dBA	38.0 / 25.0 / 22.0	38.0 / 25.0 / 22.0	39.0 / 26.0 / 23.0
		H/M/L/SL	dBA	-	-	-
Refrigerant		Type	R-410A	R-410A	R-410A	
Power Supply			1~/220-240/220-230V/50/60Hz	1~/220-240/220-230V/50/60Hz	1~/220-240/220-230V/50/60Hz	

Outdoor Unit				RKS20E2V1B	RKS25E2V1B	RKS35E2V1B
Dimensions	(Height x Width x Depth)	mm	550x765x285	550x765x285	550x765x285	
Weight		kg	30	32	32	
Sound pressure level	H / L		dBA	46 / 43	46 / 43	47 / 44
			dBA	61	61	62
Operation Range	Cooling	Min~Max	°CDB	-10~46	-10~46	-10~46
Refrigerant		Type	R-410A	R-410A	R-410A	
Power Supply			1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz	
Piping connections	Liquid (OD)/Gas/Drain	mm	6.35 / 9.5 / 18	6.35 / 9.5 / 18	6.35 / 9.5 / 18	
Piping Length (Maximum)		m	20	20	20	
Max. internunit level difference		m	15	15	15	