



FTKS-F / RKS-F

Wall mounted Unit



ARC433A70




FTKS50,60,71F



RKS50,60,71F

- Flat front panel: its stylish appearance blends easily within any interior décor and is more easy to clean.
- Lightweight and compact
- Home leave operation saves energy during absence
- Movement sensor saves power consumption in unoccupied rooms
- Dual air discharge flow for better air distribution
- Titanium apatite photocatalytic air purification filter
- Indoor / outdoor unit silent operation
- Night quiet mode (only in multi application and cooling only mode)

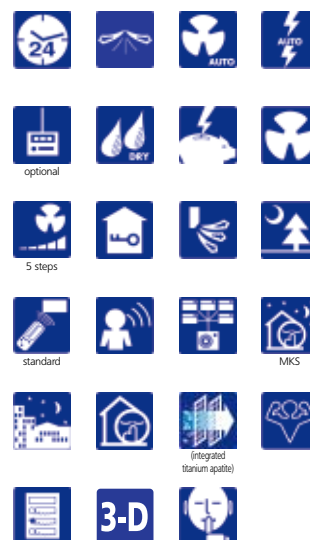

COOLING ONLY

INVERTER

Indoor Units				FTKS50FV1B	FTKS60FV1B	FTKS71FV1B
Nominal Capacity	Cooling capacity	Minimum	kW	1.7	1.7	2.3
		Standard	kW	5.0	6.0	7.1
		Maximum	kW	6.0	6.7	8.5
EER	Nominal		3.23	3.02	3.02	
Annual energy consumption		kWh	775	995	1175	
Energy Label	cooling		A	B	B	
Dimensions	(Height x Width x Depth)	mm	290x1050x238	290x1050x238	290x1050x238	
Weight		kg	12	12	12	
Air Flow Rate	Cooling	H/M/L/SL	m³/min	14.7 / 12.4 / 10.3 / 9.5	16.2 / 13.6 / 11.4 / 10.2	17.4 / 14.6 / 11.6 / 10.6
Sound Power	Cooling	Medium	dBA	59	61	62
Sound Pressure	Cooling	H/M/L/SL	dBA	43 / 39 / 34 / 31	45 / 41 / 36 / 33	46 / 42 / 37 / 34
Refrigerant		Type		R-410A	R-410A	R-410A
Power Supply				1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz

Outdoor Unit				RKS50F2V1B	RKS60F2V1B	RKS71FV1B
Dimensions	(Height x Width x Depth)	mm		735x825x300	735x825x300	770x900x320
Weight		kg		48	47	71
Sound pressure level		H/SL	dBA	47 / 44	49 / 46	52 / 49
Sound power level		H	dBA	61	63	66
Operation Range	Cooling	Min~Max	°CDB	-10~46	-10~46	-10~46
Refrigerant		Type		R-410A	R-410A	R-410A
Power Supply				1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz
Piping connections	Liquid (OD)/Gas/Drain	mm		6.35 / 12.7 / 20	6.35 / 12.7 / 18	6.35 / 15.9 / 18
Piping Length (Maximum)		m		30	30	30
Max. internunit level difference		m		20	20	20