

# FTKS-D / RKS-E/F

Wall mounted unit



ARC433A43



FTKS20,25,35D3VML


FTKS20,25,35D3VMW



RKS25,35F

- Flat front panel: its stylish appearance blends easily within any interior décor and is more easy to clean.
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- ECONO mode decreases power consumption so that other appliances that need large power supply can be used
- Energy saving
- Reaches set temperature more quickly
- Movement sensor saves power consumption in unoccupied rooms
- Dual air discharge flow for better air distribution
- **Comfort Mode:** guarantees draught free operation. When it cools, the flap is positioned horizontally to prevent cold air flow from being blown directly onto the body. When it heats, the flap turns vertically downwards to take the warm air to the bottom of the room.

- Titanium apatite photocatalytic air purification filter absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses
- **Powerful operation:** activates the maximum air volume for 20 minutes. After this, the air conditioner automatically returns to its original setting.
- Indoor / outdoor unit silent operation
- Night quiet mode (only in multi application and cooling only mode)
- Connection to multi outdoor possible

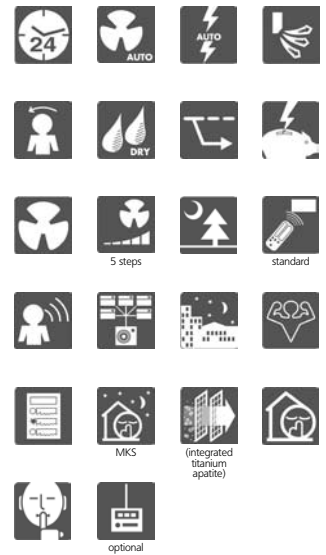

## COOLING ONLY

## INVERTER

Indoor Units				FTKS20D3VMW	FTKS20D3VML	FTKS25D3VMW	FTKS25D3VML	FTKS35D3VMW	FTKS35D3VML
Nominal Capacity	Cooling capacity	Minimum	kW	1.2	-	-	-	-	-
		Standard	kW	2.0	-	-	-	-	-
		Maximum	kW	2.6	-	-	-	-	-
EER	Nominal		4.17	-	-	-	-	-	
Annual energy consumption			kWh	240	-	-	-	-	
Energy Label	cooling		A	-	-	-	-	-	
Dimensions (Height x Width x Depth)		mm		283x800x195		283x800x195		283x800x195	
Weight		kg		9.0		9.0		9.0	
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.7 / 6.7 / 4.7 / 3.9		8.7 / 6.7 / 4.7 / 3.9		8.9 / 6.9 / 4.8 / 4.0	
Sound Power	Cooling	High	dBA	56.0		56.0		57.0	
Sound Pressure	Cooling	H/L/SL	dBA	38.0 / 25.0 / 22.0		38.0 / 25.0 / 22.0		39.0 / 26.0 / 23.0	
Refrigerant		Type		R-410A		R-410A		R-410A	
Power Supply				1~/220-240/220-230V/50/60Hz		1~/220-240/220-230V/50/60Hz		1~/220-240/220-230V/50/60Hz	

Outdoor Unit			RKS20E2V1B	RKS25F2V1B	RKS35F2V1B
Dimensions (Height x Width x Depth)		mm	550x765x285	550x765x285	550x765x285
Weight		kg	30	34	34
Sound pressure level		H / L	dBA	46 / 43	47 / 44
Sound power level		H	dBA	61	62
Operation Range	Cooling	Min~Max	°CDB	-10~46	-10~46
Refrigerant		Type	R-410A	R-410A	R-410A
Power Supply			1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz
Piping connections	Liquid (OD)/Gas/Drain	mm	6.35 / 9.5 / 18	6.35 / 9.5 / 20	6.35 / 9.5 / 20
Piping Length (Maximum)		m	20	20	20
Max Installation Height Difference		m	15	15	15