

FTXS-D RXS-D/E

Wall mounted unit




FTXS20,25,35DL



RXS20,25,35D

- Flat front panel: stylish appearance and more easy to clean
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- ECONO mode decreases the power consumption so that other appliances that need large power consumption can be used. This function is also energy saving.
- Achieves set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor automatically saves power consumption in unoccupied rooms

- Dual air discharge flow for better air distribution
- COMFORT mode reassures draught free operation
- Titanium apatite photocatalytic air purification filter: this filter absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses
- Powerful mode can be selected for rapid cooling and/or heating
- Indoor unit silent operation
- Outdoor unit silent operation
- Night quiet mode (only in multi application + cooling mode)

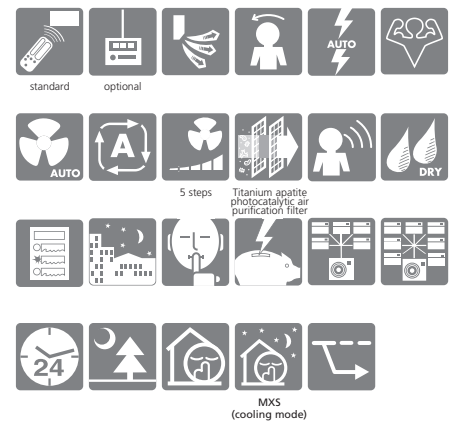

HEAT PUMP

INDOOR UNIT (air cooled)

Cooling capacity	min ~ nom ~ max	kW
Heating capacity	min ~ nom ~ max	kW
Nominal input	cooling	min ~ nom ~ max
	heating	min ~ nom ~ max
EER		
COP		
Energy label	cooling	
	heating	
Annual energy consumption	cooling	kWh
Dimensions	HxWxD	mm
Weight		kg
Air flow rate	cooling	H/L/SL
	heating	H/L/SL
Sound pressure level	cooling	H/L/SL
	heating	H/L/SL
Sound power level	cooling	H
Refrigerant type		
Power supply		VM/V1
Infrared remote control		

INVERTER

new ➔

FTXS20DW/L	FTXS25DW/L	FTXS35DW/L	FTXS50DW/L
13~20~2.6	13~25~3.0	14~34~3.8	20~50~5.2
13~2.7~4.1	13~3.4~4.5	14~4.0~5.0	20~5.8~6.0
0.30~0.49~0.83	0.30~0.685~0.96	0.30~1.045~1.27	0.50~1.65~1.82
0.29~0.66~1.30	0.29~0.92~1.43	0.31~1.155~1.56	0.52~2.06~2.19
4.08	3.65	3.25	3.03
4.09	3.70	3.46	2.82
A	A	A	B
A	A	B	D
245	343	523	825
283x800x195			283x800x195
9	9	9	9
8.7/4.7/3.9	8.7/4.7/3.9	8.9/4.8/4.0	11.4/7.1/6.2
9.4/5.8/5.0	9.4/5.8/5.0	9.7/6.0/5.2	11.4/7.4/6.3
38/25/22	38/25/22	39/26/23	46/35/32
38/28/25	38/28/25	39/29/26	46/34/31
56	56	57	62
R-410A			R-410A
1~, 220-240/220-230V, 50/60Hz			1~, 220-240, 50Hz
ARC433A50			ARC433B50

Notes:

- 1) Energy label: scale from A (most efficient) to G (less efficient).
- 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT

Dimensions	HxWxD	mm
Weight		kg
Sound pressure level	cooling	H/L
	heating	H/L
Sound power level	cooling	H
	heating	H
Operation range		°CWB
Refrigerant type		
Power supply		VM/V1
Piping connections	liquid/gas	mm
Max. piping length/Max. level difference		m

RXS20D	RXS25D	RXS35D	RXS50E
550x765x285			735x825x300
30		32	48
46/43	46/43	47/44	47/44
47/44	47/44	48/45	48/45
61	61	62	61
	-10 ~ 46		-10 ~ 46
	-15 ~ 20		-15 ~ 18
	R-410A		R-410A
	1 ~, 220-240/220-230V, 50/60Hz		1 ~, 220-240, 50Hz
	ø6.4/ø9.5		ø6.4/ø12.7
	20/15		30/20