



new ➔

FTXS-E/RXS-E

Wall mounted unit




FTXS60,71E



RXS60,71E

- Flat front panel: stylish appearance and more easy to clean
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- Achieves set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor automatically saves power consumption in unoccupied rooms
- Dual air discharge flow for better air distribution
- 3D-air flow

- Titanium apatite photocatalytic air purification filter
- Powerful mode can be selected for rapid cooling and/or heating
- Indoor unit silent operation
- Outdoor unit silent operation
- Night quiet mode (only in multi application + cooling mode)

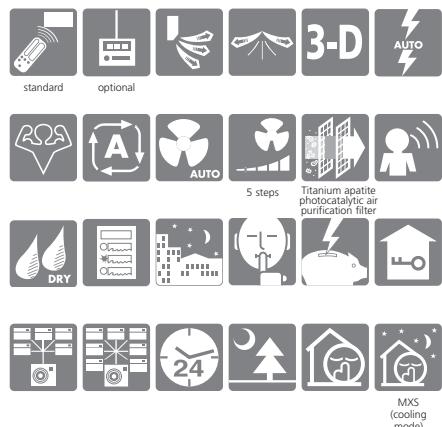

HEAT PUMP

INDOOR UNIT (air cooled)

			FTXS50E	FTXS60E	FTXS71E
Cooling capacity	min ~ nom ~ max	kW	2.0 ~ 5.0 ~ 6.0	20 ~ 6.0 ~ 6.7	4.0 ~ 7.0 ~ 8.3
Heating capacity	min ~ nom ~ max	kW	2.0 ~ 5.8 ~ 7.7	20 ~ 7.0 ~ 8.0	4.0 ~ 8.1 ~ 10.0
Nominal input	cooling	min ~ nom ~ max	0.50 ~ 1.55 ~ 2.08	0.50 ~ 1.99 ~ 2.40	1.08 ~ 2.48 ~ 3.58
	heating	min ~ nom ~ max	0.50 ~ 1.60 ~ 2.53	0.50 ~ 2.04 ~ 2.81	0.87 ~ 2.52 ~ 3.78
EER			3.23	3.02	2.82
COP			3.63	3.43	3.21
Energy label	cooling		A	B	C
	heating		A	B	C
Annual energy consumption	cooling	kWh	775	995	1,240
Dimensions	HxWxD	mm		290x1050x238	
Weight		kg		12	
Air flow rate	cooling	H/L/SL	m³/min	14.7 ~ 10.3 ~ 9.5	16.2 ~ 11.4 ~ 10.2
	heating	H/L/SL	m³/min	16.1 ~ 11.5 ~ 10.2	17.4 ~ 12.7 ~ 11.4
Sound pressure level	cooling	H/L/SL	dB(A)	43/34/31	45/36/33
	heating	H/L/SL	dB(A)	42/33/30	44/35/32
Sound power level	cooling	H	dB(A)	59	61
				R-410A	17.4 ~ 11.6 ~ 10.6
Refrigerant type					19.7 ~ 13.5 ~ 12.1
Power supply		V1		1 ~, 220 ~ 240V, 50Hz	46/37/34
Infrared remote control				ARC433822	46/37/34

Notes:

- 1) Energy label: scale from A (most efficient) to G (less efficient).
- 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT

			RXS50E	RXS60E	RXS71E
Dimensions	HxWxD	mm		735x825x300	
Weight		kg	48		56
Sound pressure level (night quiet mode)	cooling	H/L	47/44	49/46	53/49
	heating	H/L	48/45	49/46	52/49
Sound power level	cooling	H	dB(A)	61	63
	heating	from ~ to	°CDB		66
Operation range	cooling	from ~ to	°CWB	-10 ~ 46	
	heating	from ~ to		-15 ~ 18	
Refrigerant type				R-410A	
Power supply		V1		1 ~, 220 ~ 240V, 50Hz	
Piping connections	liquid/gas	mm		ø6.4/ø12.7	
Max. piping length/Max. level difference		m		30/20	ø6.4/ø15.9