



FXFQ-M7


4-Way blow ceiling mounted cassette

FXFQ80,100,125M7



- Compact and lightweight
- Possibility to shut 1 or 2 flaps for easy installation in corners
- 1 or 2 branches can be used for better air distribution
- Choice of 3 auto-swing positions for maximum comfort : standard, draught prevention or ceiling soiling prevention

- Requires only 240mm of ceiling space (298mm for model 80 and above)
- Easy to fit decoration panel
- Drain pump with increased lift of 750 mm fitted as standard

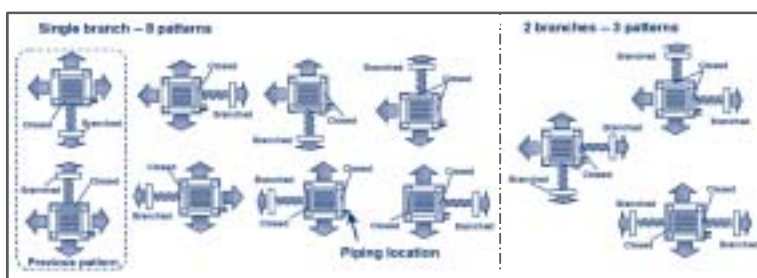

FXFQ-M7V1B

INDOOR UNIT		20	25	32	40	50	63	80	100	125
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	9.0	11.2	14.0
Heating capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0	10.0	12.5	16.0
Nominal input	cooling	W	90	90	90	97	106	118	173	230
	heating	W	75	75	75	82	90	101	159	215
Dimensions (HxWxD)	mm	230x840x840						288x840x840		
Weight	kg	24						28		
Air flow rate (H/L)	m ³ /min	13/10	13/10	13/10	14/10	16/11	18/14	28/20	28/21	31/24
Sound pressure level (H/L)	dB(A)	31/28	31/28	31/28	32/28	33/28	34/29	38/32	40/33	45/36
Sound power level	dB(A)	48	48	48	49	50	51	54	56	61
Refrigerant type		R-410A								
Power supply	V1	1 ~, 50Hz, 230V								
Infrared remote control	cooling	BRC7C513W								
	heating	BRC7C512W								
Wired remote control		BRC1D517								
DECORATION PANEL		BYC125KJW1								
Dimensions (HxWxD)	mm	40x950x950								
Weight	kg	5								