



# FXFQ-M7



## 4-Way blow ceiling mounted cassette

FXFQ80,100,125M7



- Compact and lightweight
- Possibility to shut 1 or 2 flaps for easy installation in corners
- 1 or 2 branches can be used for better air distribution
- Choice of 3 auto-swing positions for maximum comfort : standard, draught prevention or ceiling soiling prevention

- Requires only 240mm of ceiling space (298mm for model 80 and above)
- Easy to fit decoration panel
- Drain pump with increased lift of 750 mm fitted as standard

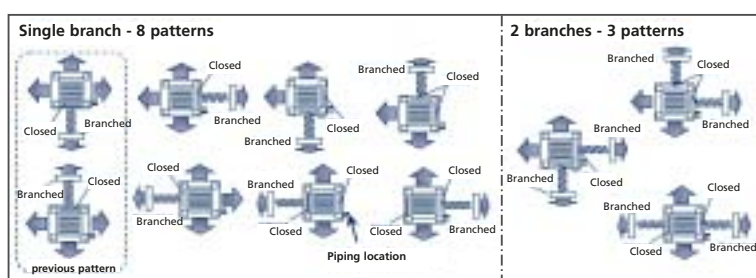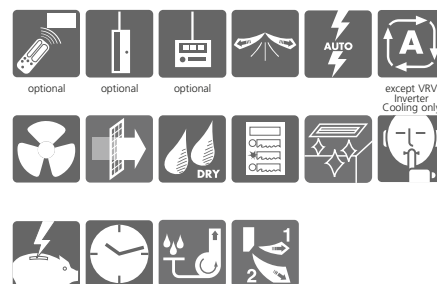

### FXFQ-M7V1B

INDOOR UNIT			20	25	32	40	50	63	80	100	125
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1	9.0	11.2	14.0
Heating capacity		kW	2.5	3.2	4.0	5.0	6.3	8.0	10.0	12.5	16.0
Nominal input	cooling	W	90	90	90	97	106	118	173	184	230
	heating	W	75	75	75	82	90	101	159	169	215
Dimensions (HxWxD)		mm	230x840x840						288x840x840		
Weight		kg	24						28		
Air flow rate (H/L)		m <sup>3</sup> /min	13/10	13/10	13/10	14/10	16/11	18/14	28/20	28/21	31/24
Sound pressure level (H/L)		dB(A)	31/28	31/28	31/28	32/28	33/28	34/29	38/32	40/33	45/36
Sound power level		dB(A)	48	48	48	49	50	51	54	56	61
Refrigerant type			R-410A								
Power supply		V1	1 ~, 50Hz, 230V								
Infrared remote control	cooling		BRC7C513W								
	heating		BRC7C512W								
Wired remote control			BRC1D527								
DECORATION PANEL			BYC125K7W18								
Dimensions (HxWxD)		mm	40x950x950								
Weight		kg	5								