



➔ new

FXFQ-M8



4-Way blow ceiling mounted cassette

FXFQ80,100,125M8



- Compact and lightweight
- Possibility to shut 1 or 2 flaps for easy installation in corners
- 1 or 2 branches can be used for better air distribution
- Choice of 3 auto-swing positions for maximum comfort: standard, draught prevention or ceiling soiling prevention

- Requires only 240mm of ceiling space (298mm for model 80 and above)
- Easy to fit decoration panel
- Drain pump with increased lift of 750 mm fitted as standard

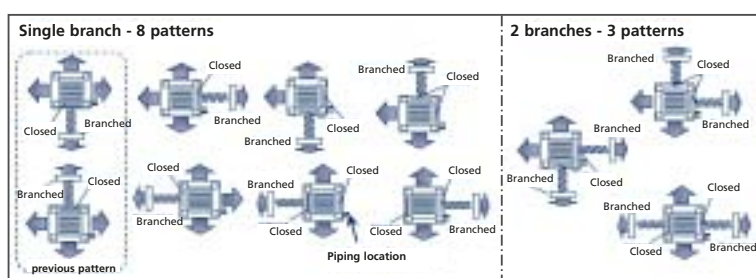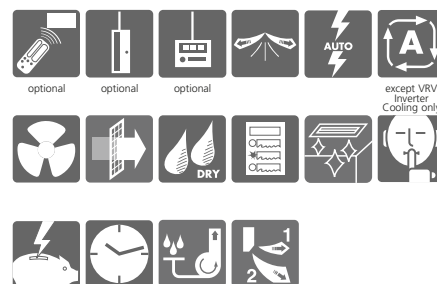

FXFQ-M8

| INDOOR UNIT | | | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 | 125 |
|----------------------------|---------|------------|-----------------|-------|-------|-------|-------|-------|-------------|-------|-------|
| Cooling capacity | | kW | 2.2 | 2.8 | 3.6 | 4.5 | 5.6 | 7.1 | 9.0 | 11.2 | 14.0 |
| Heating capacity | | kW | 2.5 | 3.2 | 4.0 | 5.0 | 6.3 | 8.0 | 10.0 | 12.5 | 16.0 |
| Nominal input | cooling | W | 90 | 90 | 90 | 97 | 106 | 118 | 173 | 184 | 230 |
| | heating | W | 75 | 75 | 75 | 82 | 90 | 101 | 159 | 169 | 215 |
| Dimensions (HxWxD) | | mm | 230x840x840 | | | | | | 288x840x840 | | |
| Weight | | kg | 24 | | | | | | 28 | | |
| Air flow rate (H/L) | | m³/min | 13/10 | 13/10 | 13/10 | 14/10 | 16/11 | 18/14 | 28/20 | 28/21 | 31/24 |
| Sound pressure level (H/L) | | dB(A) | 31/28 | 31/28 | 31/28 | 32/28 | 33/28 | 34/29 | 38/32 | 40/33 | 45/36 |
| Sound power level | | dB(A) | 48 | 48 | 48 | 49 | 50 | 51 | 54 | 56 | 61 |
| Refrigerant type | | | R-410A | | | | | | | | |
| Power supply | | V1 | 1 ~, 50Hz, 230V | | | | | | | | |
| Piping connections | | liquid/gas | ø6.4/ø12.7 | | | | | | ø9.5/ø15.9 | | |
| Infrared remote control | | cooling | BRC7CS13 | | | | | | | | |
| | | heating | BRC7CS12 | | | | | | | | |
| Wired remote control | | | BRC1D52 | | | | | | | | |
| DEcoration panel | | | BYC125K | | | | | | | | |
| Dimensions (HxWxD) | | mm | 40x950x950 | | | | | | | | |
| Weight | | kg | 5 | | | | | | | | |