

technical data



ventilation

FXMQ-MFV1

technical data



ventilation

FXMQ-MFV1

TABLE OF CONTENTS

FXMQ-MFV1

1	Features	2
2	Specifications	3
	Technical Specifications	3
	Electrical Specifications	3
3	Safety device settings	5
4	Options	6
5	Control systems	7
6	Capacity tables	8
	Cooling/Heating capacity tables	8
7	Dimensional drawing & centre of gravity	11
	Dimensional drawing	11
	Centre of gravity	13
8	Piping diagram.....	14
9	Wiring diagram.....	15
	Wiring diagram	15
10	Sound data.....	16
	Sound pressure spectrum	16
11	Fan characteristics	17
12	Operation range	18

1 Features

- 100% fresh air intake possible
- Leaves maximum floor and wall space for furniture, decorations and fittings
- Operation range: -5°C to 43°C
- 225 Pa external static pressure allows extensive ductwork runs and flexible application: ideal for use in large areas
- Drain pump kit available as accessor



2 Specifications

2-1 TECHNICAL SPECIFICATIONS				FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1
Capacity	Cooling		kW	14.0	22.4	28.00
	Heating		kW	8.9	13.9	17.40
Power Input	Cooling		kW	0.359	0.548	0.638
	Heating		kW	0.359	0.548	0.638
Casing	Material			Galvanised steel		
Dimensions	Unit	Height	mm	470	470	470
		Width	mm	744	1380	1380
		Depth	mm	1100	1100	1100
Weight	Unit		kg	86	123	123
Heat Exchanger	Dimensions	Nr of Rows		3	3	3
		Fin Pitch	mm	2.00	2.00	2.00
		Face Area	m²	0.28	0.65	0.65
		Nr of Stages		26	26	26
	Fin	Fin type		Cross fin coil		
Fan	Type			Sirocco fan		
Air Flow Rate	Cooling	Medium	m³/min	18.0	28.0	35.0
	Heating	Medium	m³/min	18.0	28.0	35.0
Fan	External static pressure	Standard	Pa	185	225	205
	Motor	Model		D13/4G2DA1		
		Output (high)	W	380	380	380
		Drive		Direct drive		
Piping connections	Liquid (OD)	Type		Flare connection		
		Diameter	mm	9.52	9.52	9.52
	Gas	Type		Flare connection	Brazing/Brazing connection	
		Diameter	mm	15.9	19.1	22.2
	Drain	Diameter	mm	PS1B		
	Heat Insulation			Glass fiber		
Air Filter				As option. (See notes)		
Refrigerant control				Electronic expansion valve		
Temperature control				Microprocessor thermostat for cooling and heating		
Safety devices				Fuse		
				Fan motor thermal protector		
Standard Accessories	Standard Accessories			Installation and operation manual		
				Sealing pads		
				Screws		
				Clamps		
					Connection pipes	
				Notes		
			Nominal heating capacities are based on : outdoor temperature : 0×CDB, -2.9°CWB (50%RH), discharge set temperature : 25°CDB, equivalent piping length 7.5m (horizontal)			
			Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat.			
			Air filter is not standard accessory, but please mount it in the duct system of the suction side. Select its colorimetric method(gravity method) 50% or more.			

2-2 ELECTRICAL SPECIFICATIONS				FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1
Power Supply	Frequency	Hz		50	50	50
	Voltage	V		220-240		
Current	Minimum circuit amps (MCA)	A		1.90	3.30	3.80
	Maximum fuse amps (MFA)	A		15	15	15
	Full load amps (FLA)	A		1.50	2.60	3.00
Voltage range	Minimum	V		-10%		
	Maximum	V		+10%		

2 Specifications

2-2 ELECTRICAL SPECIFICATIONS	FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1
Notes	Voltage range : units are suitable for use on electrical systems where voltage supplied to unit terminals is not below or above listed range limits.		
	Maximum allowable voltage range variation between phases is 2%.		
	MCA/MFA : $MCA = 1.25 \times FLA$		
	MFA is smaller than or equal to $4 \times FLA$		
	Next lower standard fuse rating minimum 15A		
	Select wire size based on the MCA		
	Instead of a fuse, use a circuit breaker		

3 Safety device settings

FXMQ-MFV1		125	200	250
PC BOARD FUSE		250V 10A		
FAN MOTOR THERMAL PROTECTOR	°C	OFF: 135±8 (ON: 87±15)		
3D034597C				

4 Options

FXMQ-MFV1		125	200	250
DRAIN PUMP KIT		KDU30L250VE		
HIGH EFFICIENCY FILTER	65%	KAFJ372L140	KAFJ372L280	
	90%	KAFJ373L140	KAFJ373L280	
FILTER CHAMBER		KDJ3705L140	KDJ3705L280	
LONG LIFE REPLACEMENT FILTER		KAFJ371L140	KAFJ371L280	

3D046270

5 Control systems

No.	Item	Type	FXMQ-MFV1
1	Remote control	Wired	BRC1A62
4	Adapter for wiring		KRP1B61
5-1	Wiring adapter for electrical appendices (1)		KRP2A61
5-1	Wiring adapter for electrical appendices (2)		KRP4A51
8	Central remote control		DCS302C61
8-1	Electrical box with earth terminal (3 blocks)		KJB311A
9	Unified on/off controller		DCS301B61
9-1	Electrical box with earth terminal (2 blocks)		KJB212A
9-2	Noise filter (for electromagnetic interface use only)		KEK26-1
10	Schedule timer		DST301B61
11	External control adapter for outdoor unit (Must be installed on indoor units)		DTA104A61

3D034600C

6 Capacity tables

6 - 1 Cooling/Heating capacity tables

<FXMQ125MFV1>

Cooling

Outdoor temperature °CDB	°CWB							
	15.0	17.0	20.0	23.0	26.0	28.0	30.0	32.0
	Capacity							
	kW	kW	kW	kW	kW	kW	kW	kW
20.0	3.6	3.8	-	-	-	-	-	-
22.0	3.6	3.8	5.1	-	-	-	-	-
25.0	3.6	3.8	5.1	6.8	-	-	-	-
27.0	-	3.8	5.1	6.7	-	-	-	-
29.0	-	-	5.1	6.7	11.0	-	-	-
31.0	-	-	5.0	6.6	10.9	14.1	-	-
33.0	-	-	5.0	6.5	10.8	14.0	16.4	-
35.0	-	-	-	6.4	10.7	13.9	16.3	17.4

Heating

Outdoor temperature °CDB	°CWB								
	-7.0	-5.2	-2.9	0.0	2.0	4.0	6.0	10.0	14.0
	Capacity								
	kW	kW	kW	kW	kW	kW	kW	kW	kW
-5.0	9.7	9.7	-	-	-	-	-	-	-
0.0	-	-	8.9	-	-	-	-	-	-
3.0	-	-	7.9	7.9	7.9	-	-	-	-
7.0	-	-	-	-	6.4	6.4	6.4	-	-
11.0	-	-	-	-	-	5.0	5.0	5.0	-
15.0	-	-	-	-	-	-	3.6	3.6	3.6

4D046308

NOTES

- The above capacities are based on the following conditions:
 - Air discharge temperature setting: 18°C for cooling operation, 25°C for heating (Factory setting)
 - Equivalent piping length: 7.5 m
 - Level difference: 0m
- The above capacity values are general average values which can be generated by each compressor operation level.
- A value enclosed in a box means rated capacity.

6 Capacity tables

6 - 1 Cooling/Heating capacity tables

<FXMQ200MFV1>

Cooling

Outdoor temperature °CDB	°CWB							
	15.0	17.0	20.0	23.0	26.0	28.0	30.0	32.0
	Capacity							
	kW	kW	kW	kW	kW	kW	kW	kW
20.0	5.7	6.1	-	-	-	-	-	-
22.0	5.7	6.1	8.2	-	-	-	-	-
25.0	5.7	6.1	8.2	10.8	-	-	-	-
27.0	-	6.1	8.1	10.7	-	-	-	-
29.0	-	-	8.1	10.6	17.6	-	-	-
31.0	-	-	8.0	10.5	17.4	22.6	-	-
33.0	-	-	8.0	10.3	17.3	22.4	26.2	-
35.0	-	-	-	10.2	17.1	22.2	26.1	27.8

Heating

Outdoor temperature °CDB	°CWB								
	-7.0	-5.2	-2.9	0.0	2.0	4.0	6.0	10.0	14.0
	Capacity								
	kW	kW	kW	kW	kW	kW	kW	kW	kW
-5.0	15.0	15.0	-	-	-	-	-	-	-
0.0	-	-	13.9	-	-	-	-	-	-
3.0	-	-	12.2	12.2	12.2	-	-	-	-
7.0	-	-	-	-	10.0	10.0	10.0	-	-
11.0	-	-	-	-	-	7.8	7.8	7.8	-
15.0	-	-	-	-	-	-	5.6	5.6	5.6

4D046309

NOTES

- The above capacities are based on the following conditions:
 - Air discharge temperature setting: 18°C for cooling operation, 25°C for heating (Factory setting)
 - Equivalent piping length: 7.5 m
 - Level difference: 0m
- The above capacity values are general average values which can be generated by each compressor operation level.
- A value enclosed in a box means rated capacity.

6 Capacity tables

6 - 1 Cooling/Heating capacity tables

<FXMQ250MFV1>

Cooling

Outdoor temperature °CDB	°CWB							
	15.0	17.0	20.0	23.0	26.0	28.0	30.0	32.0
	Capacity							
	kW	kW	kW	kW	kW	kW	kW	kW
20.0	7.1	7.6	-	-	-	-	-	-
22.0	7.1	7.6	10.2	-	-	-	-	-
25.0	7.1	7.6	10.2	13.5	-	-	-	-
27.0	-	7.6	10.1	13.4	-	-	-	-
29.0	-	-	10.1	13.3	22.0	-	-	-
31.0	-	-	10.0	13.1	21.8	28.2	-	-
33.0	-	-	10.0	12.9	21.6	28.0	32.8	-
35.0	-	-	-	12.8	21.4	27.8	32.6	34.8

Heating

Outdoor temperature °CDB	°CWB								
	-7.0	-5.2	-2.9	0.0	2.0	4.0	6.0	10.0	14.0
	Capacity								
	kW	kW	kW	kW	kW	kW	kW	kW	kW
-5.0	18.8	18.8	-	-	-	-	-	-	-
0.0	-	-	17.4	-	-	-	-	-	-
3.0	-	-	15.3	15.3	15.3	-	-	-	-
7.0	-	-	-	-	12.5	12.5	12.5	-	-
11.0	-	-	-	-	-	9.8	9.8	9.8	-
15.0	-	-	-	-	-	-	7.0	7.0	7.0

4D046310


NOTES

- The above capacities are based on the following conditions:
 - Air discharge temperature setting: 18°C for cooling operation, 25°C for heating (Factory setting)
 - Equivalent piping length: 7.5 m
 - Level difference: 0m
- The above capacity values are general average values which can be generated by each compressor operation level.
- A value enclosed in a box means rated capacity.

7 Dimensional drawing & centre of gravity

7 - 1 Dimensional drawing

FXMQ125MFV1

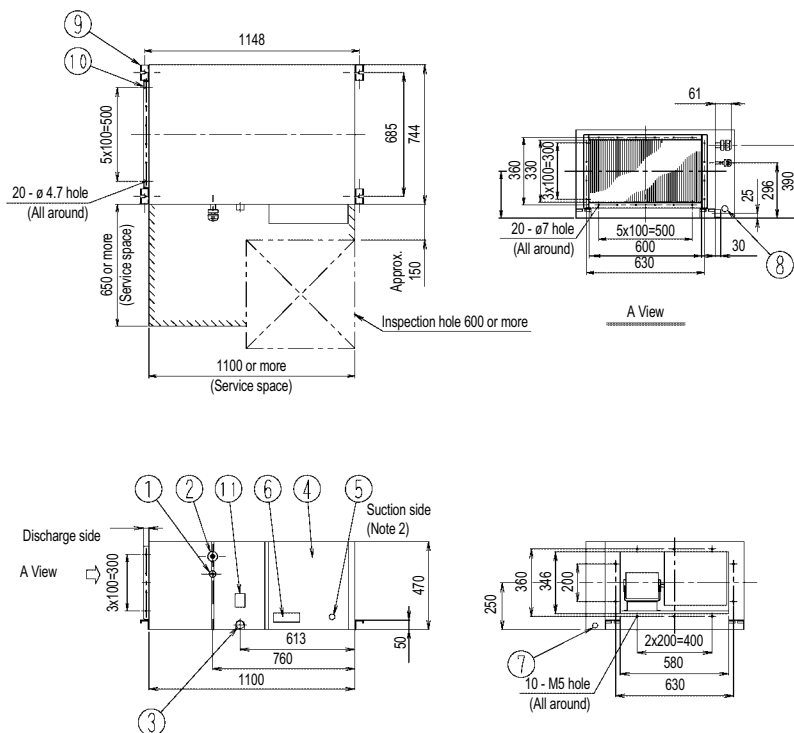

Nr	Name	Description
1	Liquid pipe connection	ø 9.5 flare connection
2	Gas pipe connection	ø 15.9 flare connection
3	Drain pipe connection	PS1B Internal thread Major dia. ø 33.349, Minor dia. ø 30.391
4	Control box	
5	Ground terminal	M5 (Inside control box)
6	Name plate	Note 1
7	Power supply wiring connection	
8	Transmission wiring connection	
9	Hanger bracket	M10
10	Discharge companion flange	
11	Water supply port	

NOTES

- Location of unit's name plates: Control box surface.
- Mount the air filter at the suction side.
(Select its colorimethod (gravity method) 50% or more).

3D045129A

FXMQ200,250MFV1


Piping size (field supply)

Indoor unit	Gas side	Liquid side
FXMQ200MFV1	ø 19.1 attached piping	ø 9.5
FXMQ250MFV1	ø 22.2 attached piping	ø 9.5

Nr	Name	Description
1	Liquid pipe connection	Flare connection
2	Gas pipe connection	Attendant piping connection
3	Drain pipe connection	PS1B Internal thread Major dia. ø 33.349, Minor dia. ø 30.391
4	Control box	
5	Ground terminal	M5 (Inside control box)
6	Name plate	Note 1
7	Power supply wiring connection	
8	Transmission wiring connection	
9	Hanger bracket	M10
10	Discharge companion flange	
11	Water supply port	
12	Attached piping	Brazing

NOTES

- Location of unit's name plates: Control box surface.
- Mount the air filter at the suction side.
(Select its colorimethod (gravity method) 50% or more).




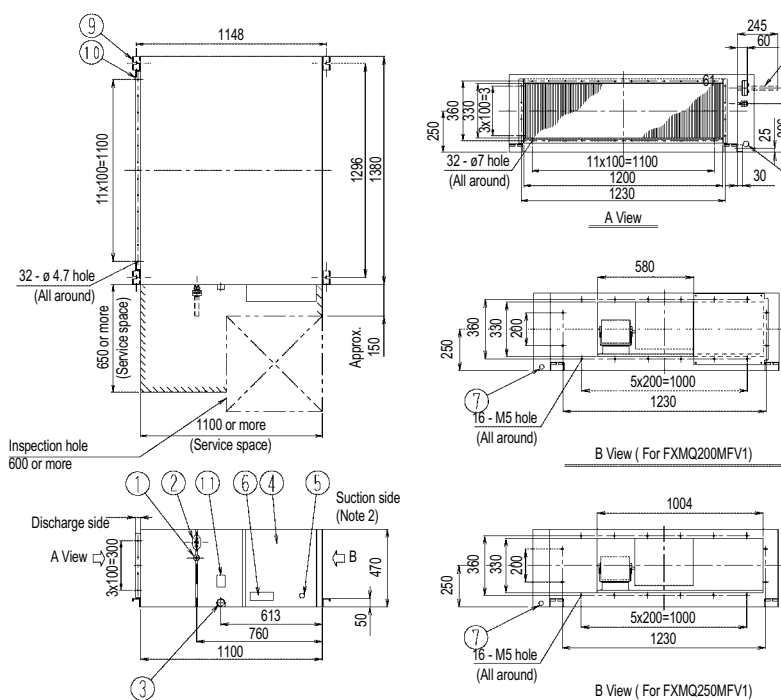


3D045128A

7 Dimensional drawing & centre of gravity

7 - 1 Dimensional drawing





FXMQ125MFV1

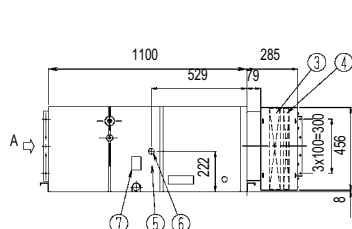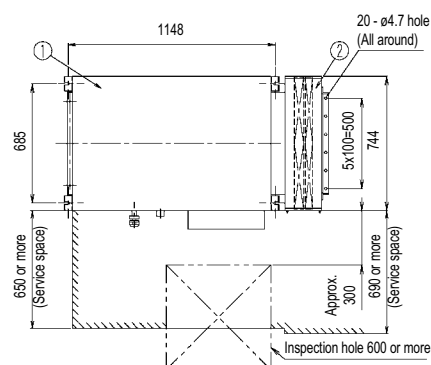

Nr	Name	Description
1	VRV D.P. Unit C. duct type	
2	Filter chamber	
3	High-efficiency filter	
4	Long-life replacement filter	
5	Drain pump kit	Built-in
6	Drain pipe connection (drain pump kit)	VP25 (O.D. ø 32, I.D. ø 25)
7	Water supply port	
8	Drain hose	Attached to drain pump kit

3D046155

FXMQ200-250MFV1

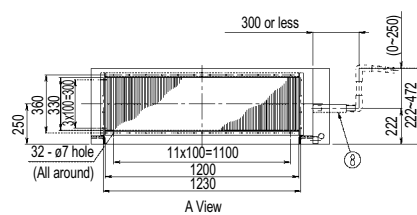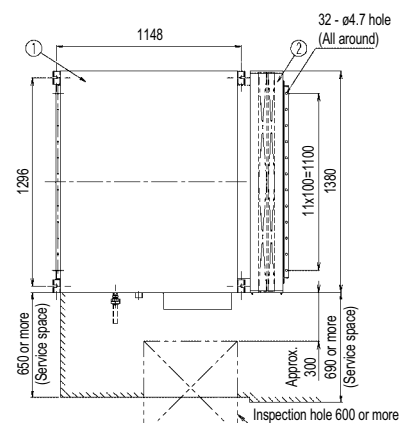


Nr	Name	Description
1	VRV D.P. Unit C. duct type	
2	Filter chamber	
3	High-efficiency filter	
4	Long-life replacement filter	
5	Drain pump kit	Built-in
6	Drain pipe connection (drain pump kit)	VP25 (O.D. ø 32, I.D. ø 25)
7	Water supply port	
8	Drain hose	Attached to drain pump kit

3D046154

7 Dimensional drawing & centre of gravity

7 - 2 Centre of gravity

FXMQ-MFV1

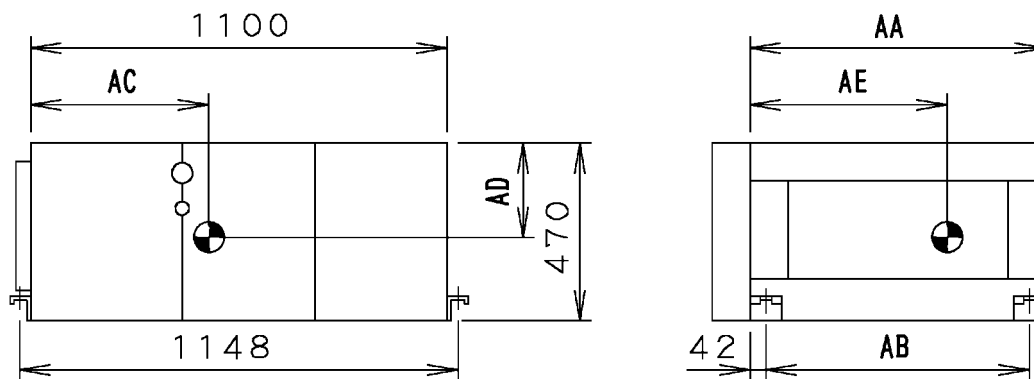


Model	Product mass	AA	AB	AC	AD	AE
FXMQ125MFV1	86 kg	780	696	600	250	300
FXMQ200MFV1	123 kg	1380	1296	570	250	600
FXMQ250MFV1	123 kg	1380	1296	570	250	600

4D046134B

8 Piping diagram

FXMQ-MFV1

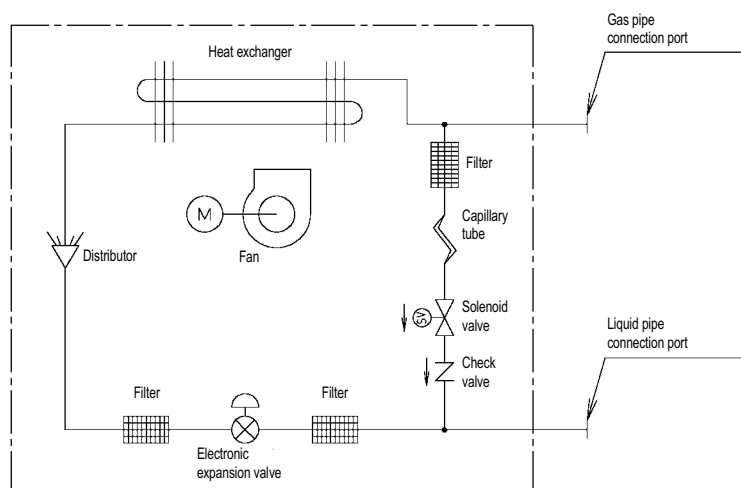


4D018650B

9 Wiring diagram

9 - 1 Wiring diagram

FXMQ-MFV1

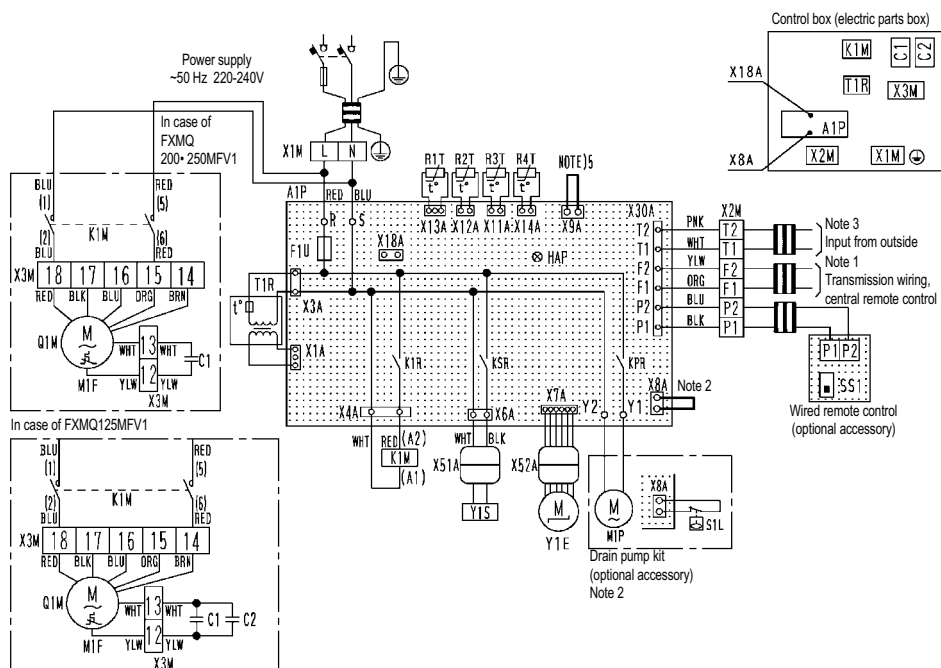

Indoor unit		R1T	Thermistor (suction air)	Optional parts	
A1P	Printed circuit board	R2T	Thermistor (coil, liquid)	M1P	Motor (Drain pump)
C1, C2	Capacitor (M1F)	R3T	Thermistor (coil, gas)	S1L	Float switch (drain pump)
F1U	Fuse (⊗, 5A, 250V) (A1P)	R4T	Thermistor (discharge air)	Wired remote control	
HAP	Light emitting diode (service monitor-green)	T1R	Transformer (220-240/22V)		
K1M	Magnetic relay (M1F)	X1M	Terminal block (power)		
K1R	Magnetic relay (M1F)	X2M	Terminal block (control)	SS1	Select switch (Main/sub)
KPR	Magnetic relay (M1P)	X3M	Terminal block		
KSR	Magnetic relay (Y1S)	X51A, X52A	Connector	Connector for optional parts	
M1F	Motor (fan)	Y1E	Electronic expansion valve	X18A	
Q1M	Thermal protector (M1F embedded 135°C)	Y1S	Solenoid valve (hot gas)		

□□□□ : Terminal block

□□, D- : Connector

□□ : Short circuit connector

—○— : Terminal

—■— : Field wiring

Colors: BLK: Black

BLU: Blue

BRN: Brown

ORG: Orange

PNK: Pink

RED: Red

WHT: White

YLW: Yellow

3D044996C


NOTES

- 1 In case of using central remote control, connect it to the unit in accordance with the attached instruction manual.
- 2 In case of installing the drain pump kit, remove the short circuit connector of X8A and execute the additional wiring for float switch and drain pump.
- 3 In case of connecting the input wires from outside, forced off or on/off control operation can be selected by remot control.
- 4 Do not remove short circuit connector of X9A.

10 Sound data

10 - 1 Sound pressure spectrum

FXMQ125MFV1

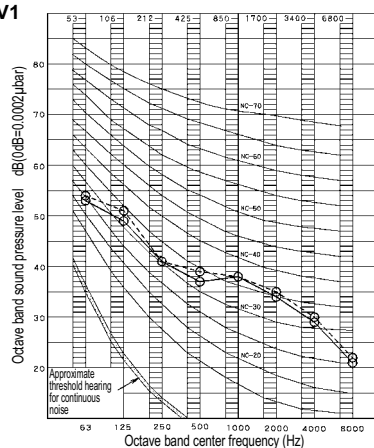


4D046271

NOTES


- Over All (dB):
(B, G, N is already rectified)
- Operating conditons:

Scale	220V	240V
A	42	43

 - Power source: 220-240V 50Hz
 - Standard condition
 - External static Pressure: 185Pa (220V), 225Pa (240V)
 - — ○ : 220 Hz
 - - - - ○ : 240 Hz
- Measuring place: Anechoic chamber
- Location of microphone



FXMQ200MFV1

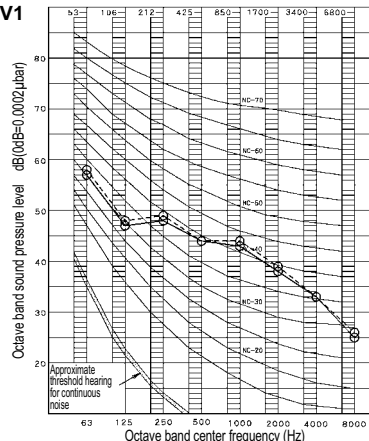


4D046272

NOTES


- Over All (dB):
(B, G, N is already rectified)
- Operating conditons:

Scale	220V	240V
A	47	48

 - Power source: 220-240V 50Hz
 - Standard condition
 - External static Pressure: 225Pa (220V), 275Pa (240V)
 - — ○ : 220 Hz
 - - - - ○ : 240 Hz
- Measuring place: Anechoic chamber
- Location of microphone



FXMQ250MFV1

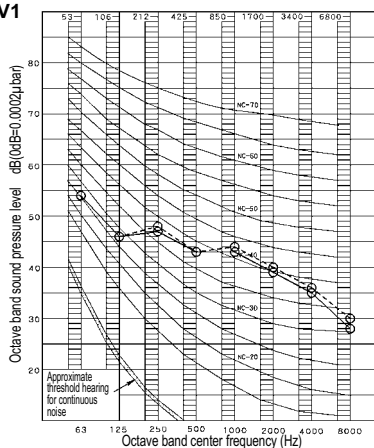


4D046273

NOTES

- Over All (dB):
(B, G, N is already rectified)
- Operating conditons:


Scale	220V	240V
A	47	48

 - Power source: 220-240V 50Hz
 - Standard condition
 - External static Pressure: 205Pa (220V), 255Pa (240V)
 - — ○ : 220 Hz
 - - - - ○ : 240 Hz
- Measuring place: Anechoic chamber
- Location of microphone




11 Fan characteristics

FXMQ125MFV1

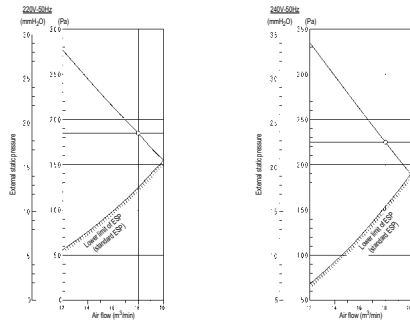


3D046267

FXMQ200MFV1

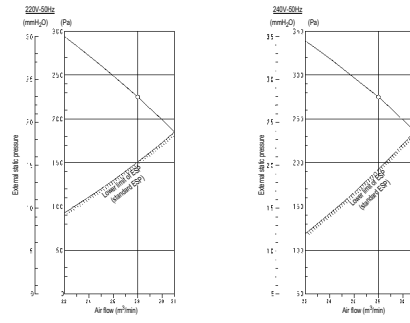

3D046266


FXMQ250MFV1

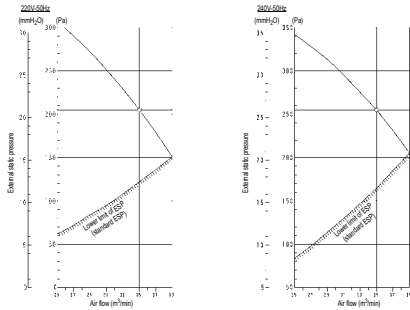

3D046265

12 Operation range

FXMQ125MFV1

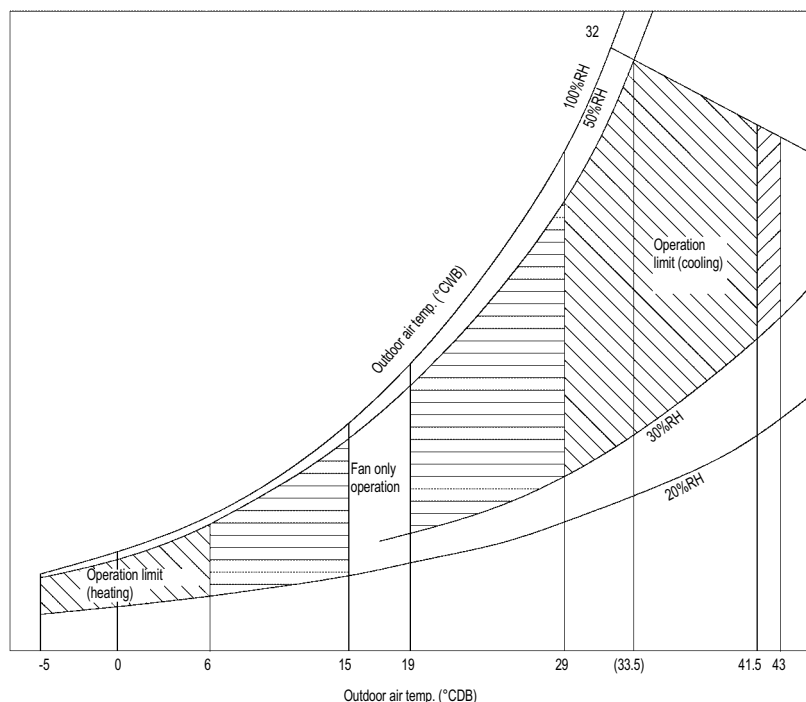


NOTES

- 1 These figures assume the following operating conditions.
(Indoor and outdoor units)
 - Equivalent piping length: 7.5m
 - Level difference: 0m
- 2 : The discharge air temperature may not match the temperature setting for too large outdoor-air processing capacity. Thermostat OFF may be carried out.
- 3 : The discharge air temperature may not match the temperature setting for too small outdoor-air processing capacity.
- 4 The system will not operate in fan mode when the outdoor-air temperature is 5°C below.

3D046312

FXMQ200MFV1

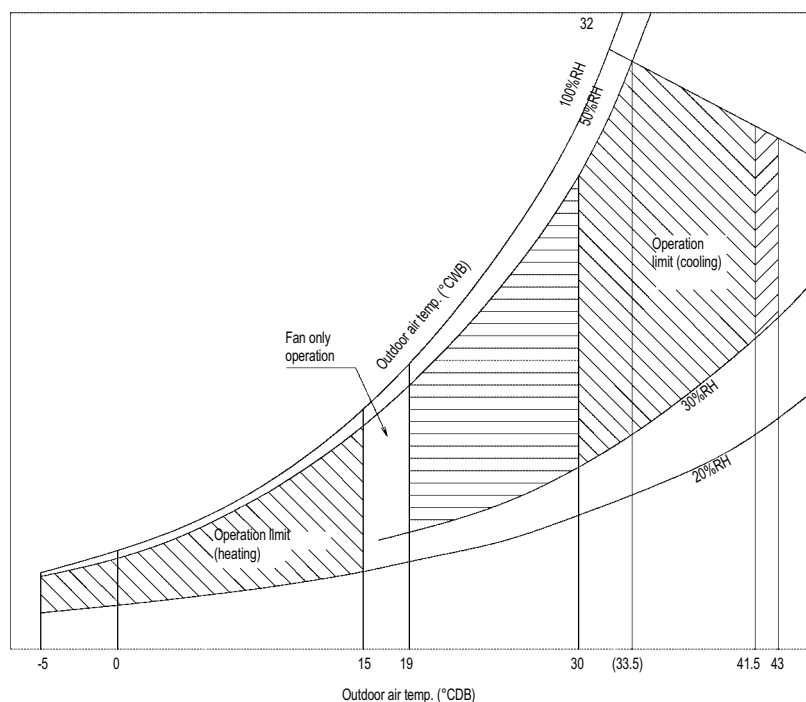


NOTES

- 1 These figures assume the following operating conditions.
(Indoor and outdoor units)
 - Equivalent piping length: 7.5m
 - Level difference: 0m
- 2 : The discharge air temperature may not match the temperature setting for too large outdoor-air processing capacity. Thermostat OFF may be carried out.
- 3 : The discharge air temperature may not match the temperature setting for too small outdoor-air processing capacity.
- 4 The system will not operate in fan mode when the outdoor-air temperature is 5°C below.

3D047750

12 Operation range

FXMQ250MFV1

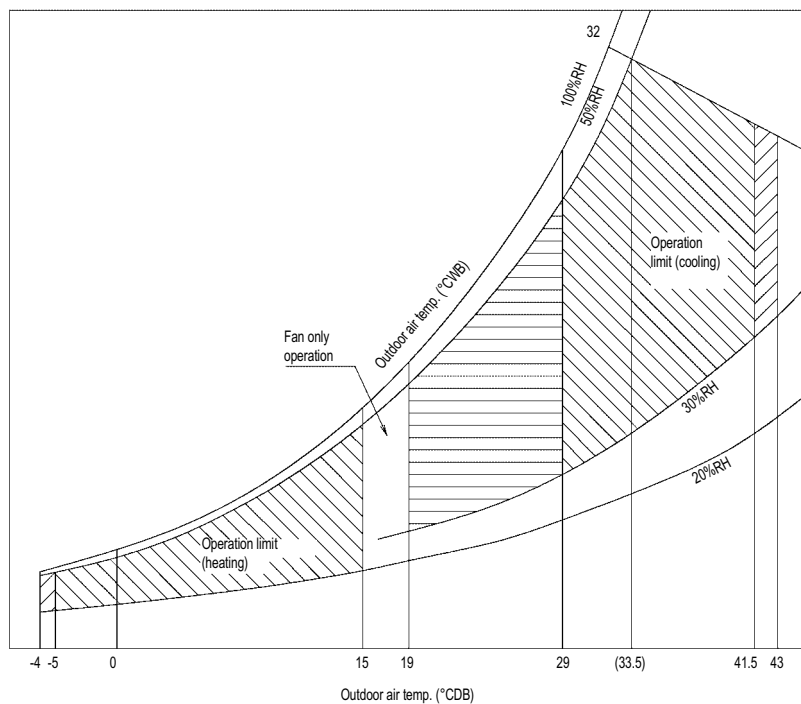

NOTES

- 1 These figures assume the following operating conditions.
(Indoor and outdoor units)
 - Equivalent piping length: 7.5m
 - Level difference: 0m
- 2 : The discharge air temperature may not match the temperature setting for too large outdoor-air processing capacity. Thermostat OFF may be carried out.
- 3 : The discharge air temperature may not match the temperature setting for too small outdoor-air processing capacity.
- 4 The system will not operate in fan mode when the outdoor-air temperature is 5°C below.

3D046313

3

Ventilation



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



Daikin Europe N.V. is approved by LRQA for its Quality Management System in accordance with the ISO9001 standard. ISO9001 pertains to quality assurance regarding design, development, manufacturing as well as to services related to the product.




ISO14001 assures an effective environmental management system in order to help protect human health and the environment from the potential impact of our activities, products and services and to assist in maintaining and improving the quality of the environment.



Daikin units comply with the European regulations that guarantee the safety of the product.

VRV® products are not within the scope of the Eurovent certification programme.

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V..



DAIKIN EUROPE N.V.

Naamloze Vennootschap
Zandvoordestraat 300
B-8400 Oostende, Belgium
www.daikin.eu
BTW: BE 0412 120 336
RPR Oostende



EEDEN08-205 • 04/2008 • Copyright © Daikin

The present publication supersedes EEDEN07-201
Prepared in Belgium by Lannoo (www.lannooprint.be), a company whose concern for the environment is set in the ENAS and ISO 14001 systems.
Responsible Editor: Daikin Europe N.V., Zandvoordestraat 300, B-8400 Oostende