

Ventilation

Technical Data

Outdoor air processing unit, ventilation and air processing



EEDEN11-205

FXMQ-MF

Ventilation

Technical Data

Outdoor air processing unit, ventilation and air processing



EEDEN11-205

FXMQ-MF

TABLE OF CONTENTS

FXMQ-MF

1	Features	2
2	Specifications	3
	Technical Specifications	3
	Electrical Specifications	3
3	Safety device settings	4
	Safety Device Settings	4
4	Options	5
5	Control systems	6
6	Capacity tables	7
	Cooling/Heating Capacity Tables	7
7	Dimensional drawings	10
	Dimensional Drawings	10
8	Centre of gravity	12
	Centre of Gravity	12
9	Piping diagrams	13
	Piping Diagrams	13
10	Wiring diagrams	14
	Wiring Diagrams - Single Phase	14
11	Sound data	15
	Sound Pressure Spectrum	15
12	Fan characteristics	16
	Fan Characteristics	16
13	Operation range	18
	Operation Range	18

1 Features

- 100% fresh air intake possible
- Ideal solution for shops, restaurants or offices requiring maximum floor space for furniture, decorations and fittings
- Operation range: -5°C to 43°C
- Up to 225Pa external static pressure allows extensive ductwork runs and flexible application: ideal for use in large areas
- Drain pump kit available as accessory



2 Specifications

2-1 Technical Specifications					FXMQ125MF	FXMQ200MF	FXMQ250MF	
Casing	Material				Galvanised steel			
Dimensions	Unit	Height	mm		470			
		Width	mm		744	1,380		
		Depth	mm		1,100			
Weight	Unit			kg	86	123		
Heat exchanger	Rows	Quantity			3			
	Stages	Quantity			26			
	Fin pitch			mm	2.0			
	Face area			m²	0.28	0.65		
Fan	Type				Sirocco fan			
Fan motor	Model				D13/4G2DA1			
Operation range	On coil temperature	Cooling	Max.	°CDB	43 (13)			
		Heating	Min.	°CDB	-5			
Refrigerant	Control				Electronic expansion valve			
Piping connections	Liquid	Type			Flare connection			
		OD		mm	9.52			
	Gas	Type			Flare connection		Braze connection	
		OD		mm	15.9		19.1	22.2
	Drain				PS1B			
Air filter					Optional / cf.note	Optional / cf.note	Optional / cf.note	
Connection ratio	Outdoor units	with only ventilation units connected	Minimum	%	50			
			Maximum	%	100			
	Ventilation units	when combined with VRV® indoor units	Maximum	%	30			

Standard Accessories : Clamps;

Standard Accessories : Screws;

Standard Accessories : Sealing pads;

Standard Accessories : Installation and operation manual;

Standard Accessories : Connection pipes;

2-2 Electrical Specifications					FXMQ125MF	FXMQ200MF	FXMQ250MF
Power supply	Phase				1~		
	Frequency			Hz	50		
	Voltage			V	220-240		
Voltage range	Min.			%	-10		
	Max.			%	10		

Notes

- (1) Cooling: outdoor temp.: 33°CDB, 28°CWB (68%RH); discharge set temperature: 18°CDB; equivalent piping length 7.5m (horizontal)
- (2) Heating: outdoor temp. 0°CDB, -2.9°CWB (50%RH); discharge set temp. 25°CDB; equivalent piping length: 7.5m (horizontal)
- (3) Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat.
- (4) The air filter is not a standard accessory, but please mount it in the duct system of the suction side. Select its colorimetric method (gravity method) 50% or more.
- (5) When connected to VRV[®] water-cooled outdoor units a mix of ventilation units and VRV[®] indoor units is not possible
- (6) Voltage range: units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits.
- (7) Maximum allowable voltage range variation between phases is 2%.
- (8) MCA/MFA: MCA = 1.25 x FLA
- (9) MFA ≤ 4 x FLA
- (10) Next lower standard fuse rating minimum 15A
- (11) Select wire size based on the value of MCA
- (12) Instead of a fuse, use a circuit breaker
- (13) 45% Relative humidity

3 Safety device settings

3 - 1 Safety Device Settings

FXMQ-MF

Safety devices		125	200	250
PC board fuse		250V 10A	250V 10A	250V 10A
Fan motor thermal fuse	°C	-	-	-
Fan motor thermal protector	°C	OFF: 135 ^{±8} ON: 85 ^{±15}	OFF: 135 ^{±8} ON: 85 ^{±15}	OFF: 135 ^{±8} ON: 85 ^{±15}

3D04597H

4 Options

FXMQ-MF		125	200	250
DRAIN PUMP KIT		KDU30L250VE		
HIGH EFFICIENCY FILTER	65%	KAFJ372L140	KAFJ372L280	
	90%	KAFJ373L140	KAFJ373L280	
FILTER CHAMBER		KDJ3705L140	KDJ3705L280	
LONG LIFE REPLACEMENT FILTER		KAFJ371L140	KAFJ371L280	

3D046270

5 Control systems

FXMQ-MF

No.	Item	Type		FXMQ-MF
		Infrared	H/P C/O	
1	Remote control			-
		Wired		BRC1A62
2	Simplified remote control			-
3	Remote control for hotel use			-
4	Adapter for wiring			KRP1B61
5-1	Wiring adapter for electrical appendices (1)			KRP2A61
5-1	Wiring adapter for electrical appendices (2)			KRP4A51
6	Remote sensor			-
7	Installation box for adapter PCB.			-
8	Central remote control			DCS302C61
8-1	Electrical box with earth terminal (3 blocks)			KJB311A
9	Unified on/off controller			DCS301B61
9-1	Electrical box with earth terminal (2 blocks)			KJB212A
9-2	Noise filter (for electromagnetic interface use only)			KEK26-1
10	Schedule timer			DST301B61
11	External control adapter for outdoor unit (Must be installed on indoor units)			DTA104A61

3D034600D

6 Capacity tables

6 - 1 Cooling/Heating Capacity Tables

<FXMQ125MF>

Cooling

Outdoor temperature °CDB	°CWB							
	15.0	17.0	20.0	23.0	26.0	28.0	30.0	32.0
	Capacity							
	kW	kW	kW	kW	kW	kW	kW	kW
20.0	3.6	3.8	-	-	-	-	-	-
22.0	3.6	3.8	5.1	-	-	-	-	-
25.0	3.6	3.8	5.1	6.8	-	-	-	-
27.0	-	3.8	5.1	6.7	-	-	-	-
29.0	-	-	5.1	6.7	11.0	-	-	-
31.0	-	-	5.0	6.6	10.9	14.1	-	-
33.0	-	-	5.0	6.5	10.8	14.0	16.4	-
35.0	-	-	-	6.4	10.7	13.9	16.3	17.4

Heating

Outdoor temperature °CDB	°CWB								
	-7.0	-5.2	-2.9	0.0	2.0	4.0	6.0	10.0	14.0
	Capacity								
	kW	kW	kW	kW	kW	kW	kW	kW	kW
-5.0	9.7	9.7	-	-	-	-	-	-	-
0.0	-	-	8.9	-	-	-	-	-	-
3.0	-	-	7.9	7.9	7.9	-	-	-	-
7.0	-	-	-	-	6.4	6.4	6.4	-	-
11.0	-	-	-	-	-	5.0	5.0	5.0	-
15.0	-	-	-	-	-	-	3.6	3.6	3.6

4D046308

NOTES

- The above capacities are based on the following conditions:
 - Air discharge temperature setting: 18°C for cooling operation, 25°C for heating (Factory setting)
 - Equivalent piping length: 7.5 m
 - Level difference: 0m
- The above capacity values are general average values which can be generated by each compressor operation level.
- A value enclosed in a box means rated capacity.

6 Capacity tables

6 - 1 Cooling/Heating Capacity Tables

<FXMQ200MF>

Cooling

Outdoor temperature °CDB	°CWB							
	15.0	17.0	20.0	23.0	26.0	28.0	30.0	32.0
	Capacity							
	kW	kW	kW	kW	kW	kW	kW	kW
20.0	5.7	6.1	-	-	-	-	-	-
22.0	5.7	6.1	8.2	-	-	-	-	-
25.0	5.7	6.1	8.2	10.8	-	-	-	-
27.0	-	6.1	8.1	10.7	-	-	-	-
29.0	-	-	8.1	10.6	17.6	-	-	-
31.0	-	-	8.0	10.5	17.4	22.6	-	-
33.0	-	-	8.0	10.3	17.3	22.4	26.2	-
35.0	-	-	-	10.2	17.1	22.2	26.1	27.8

Heating

Outdoor temperature	°CWB								
°CDB	-7.0	-5.2	-2.9	0.0	2.0	4.0	6.0	10.0	14.0
	Capacity								
	kW	kW	kW	kW	kW	kW	kW	kW	kW
-5.0	15.0	15.0	-	-	-	-	-	-	-
0.0	-	-	13.9	-	-	-	-	-	-
3.0	-	-	12.2	12.2	12.2	-	-	-	-
7.0	-	-	-	-	10.0	10.0	10.0	-	-
11.0	-	-	-	-	-	7.8	7.8	7.8	-
15.0	-	-	-	-	-	-	5.6	5.6	5.6

4D046309

NOTES

- The above capacities are based on the following conditions:
 - Air discharge temperature setting: 18°C for cooling operation, 25°C for heating (Factory setting)
 - Equivalent piping length: 7.5 m
 - Level difference: 0m
- The above capacity values are general average values which can be generated by each compressor operation level.
- A value enclosed in a box means rated capacity.

6 Capacity tables

6 - 1 Cooling/Heating Capacity Tables

<FXMQ250MF>

Cooling

Outdoor temperature °CDB	°CWB							
	15.0	17.0	20.0	23.0	26.0	28.0	30.0	32.0
	Capacity							
	kW	kW	kW	kW	kW	kW	kW	kW
20.0	7.1	7.6	-	-	-	-	-	-
22.0	7.1	7.6	10.2	-	-	-	-	-
25.0	7.1	7.6	10.2	13.5	-	-	-	-
27.0	-	7.6	10.1	13.4	-	-	-	-
29.0	-	-	10.1	13.3	22.0	-	-	-
31.0	-	-	10.0	13.1	21.8	28.2	-	-
33.0	-	-	10.0	12.9	21.6	28.0	32.8	-
35.0	-	-	-	12.8	21.4	27.8	32.6	34.8

Heating

Outdoor temperature	°CWB								
°CDB	-7.0	-5.2	-2.9	0.0	2.0	4.0	6.0	10.0	14.0
	Capacity								
	kW	kW	kW	kW	kW	kW	kW	kW	kW
-5.0	18.8	18.8	-	-	-	-	-	-	-
0.0	-	-	17.4	-	-	-	-	-	-
3.0	-	-	15.3	15.3	15.3	-	-	-	-
7.0	-	-	-	-	12.5	12.5	12.5	-	-
11.0	-	-	-	-	-	9.8	9.8	9.8	-
15.0	-	-	-	-	-	-	7.0	7.0	7.0


4D046310

NOTES

- The above capacities are based on the following conditions:
 - Air discharge temperature setting: 18°C for cooling operation, 25°C for heating (Factory setting)
 - Equivalent piping length: 7.5 m
 - Level difference: 0m
- The above capacity values are general average values which can be generated by each compressor operation level.
- A value enclosed in a box means rated capacity.


7 - 1 Dimensional Drawings

FXMQ125MF




Nr	Name	Description
1	Liquid pipe connection	ø 9.5 flare connection
2	Gas pipe connection	ø 15.9 flare connection
3	Drain pipe connection	PS1B Internal thread Major dia. ø 33.349, Minor dia. ø 30.391
4	Control box	
5	Ground terminal	M5 (Inside control box)
6	Name plate	Note 1
7	Power supply wiring connection	
8	Transmission wiring connection	
9	Hanger bracket	M10
10	Discharge companion flange	
11	Water supply port	

- 1 Location of unit's name plates: Control box surface.
- 2 Mount the air filter at the suction side.
(Select its colorimethod (gravity method) 50% or more).



3D045129A


FXMQ200,250MF

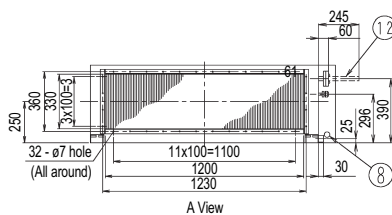

Indoor unit	Gas side	Liquid side
FXMQ200MF	ø 19.1 attached piping	ø 9.5
FXMQ250MF	ø 22.2 attached piping	ø 9.5

Nr	Name	Description
1	Liquid pipe connection	Flare connection
2	Gas pipe connection	Attendant piping connection
3	Drain pipe connection	PS1B Internal thread Major dia. ø 33.349, Minor dia. ø 30.391
4	Control box	
5	Ground terminal	M5 (Inside control box)
6	Name plate	Note 1
7	Power supply wiring connection	
8	Transmission wiring connection	
9	Hanger bracket	M10
10	Discharge companion flange	
11	Water supply port	
12	Attached piping	Brazing

- 1 Location of unit's name plates: Control box surface.
- 2 Mount the air filter at the suction side.
(Select its colorimethod (gravity method) 50% or more).




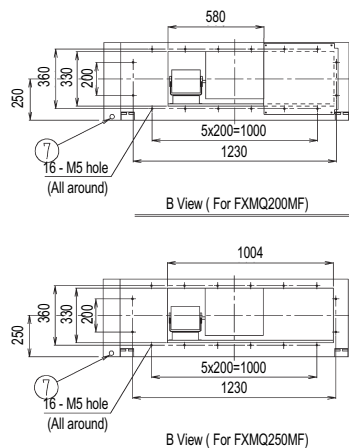


3D045128A

7 Dimensional drawings

7 - 1 Dimensional Drawings





FXMQ125MF

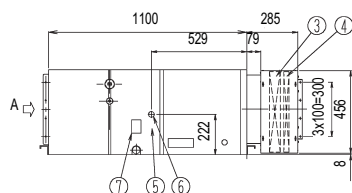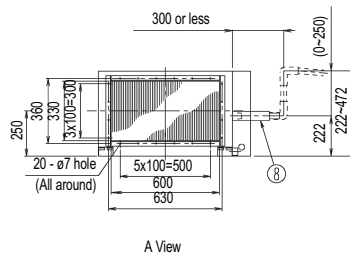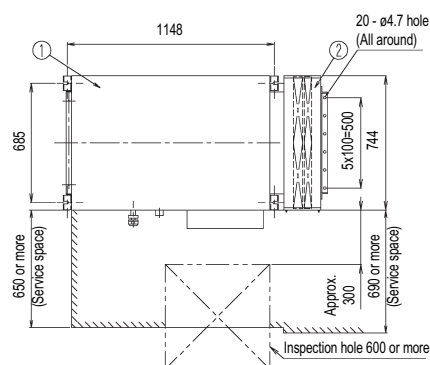

Nr	Name	Description
1	VRV D.P. Unit C. duct type	
2	Filter chamber	
3	High-efficiency filter	
4	Long-life replacement filter	
5	Drain pump kit	Built-in
6	Drain pipe connection (drain pump kit)	VP25 (O.D. ø 32, I.D. ø 25)
7	Water supply port	
8	Drain hose	Attached to drain pump kit

3D046155

FXMQ125MF

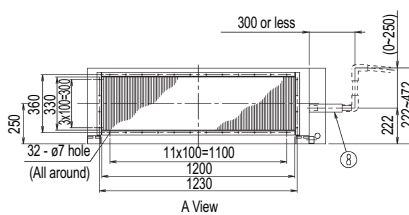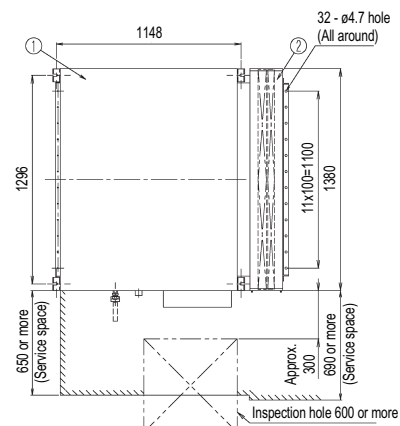


Nr	Name	Description
1	VRV D.P. Unit C. duct type	
2	Filter chamber	
3	High-efficiency filter	
4	Long-life replacement filter	
5	Drain pump kit	Built-in
6	Drain pipe connection (drain pump kit)	VP25 (O.D. ø 32, I.D. ø 25)
7	Water supply port	
8	Drain hose	Attached to drain pump kit

3D046154

8 Centre of gravity

8 - 1 Centre of Gravity

FXMQ-MF

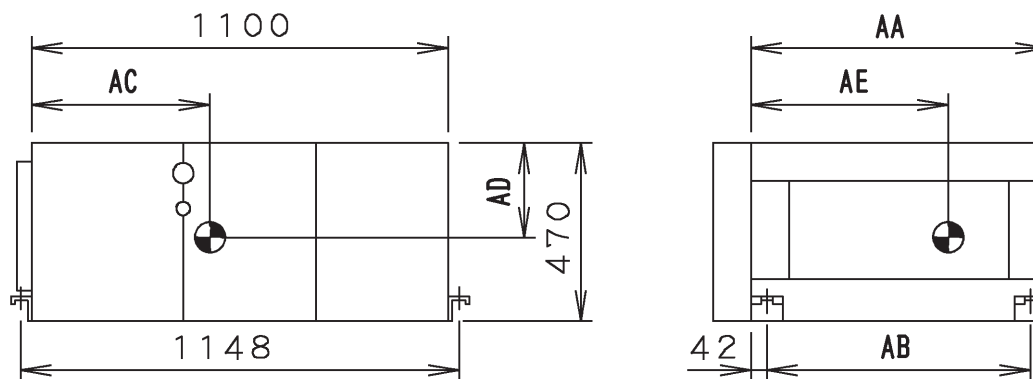


Model	Product mass	AA	AB	AC	AD	AE
FXMQ125MF	86 kg	780	696	600	250	300
FXMQ200MF	123 kg	1380	1296	570	250	600
FXMQ250MF	123 kg	1380	1296	570	250	600

4D046143B

9 Piping diagrams


9 - 1 Piping Diagrams

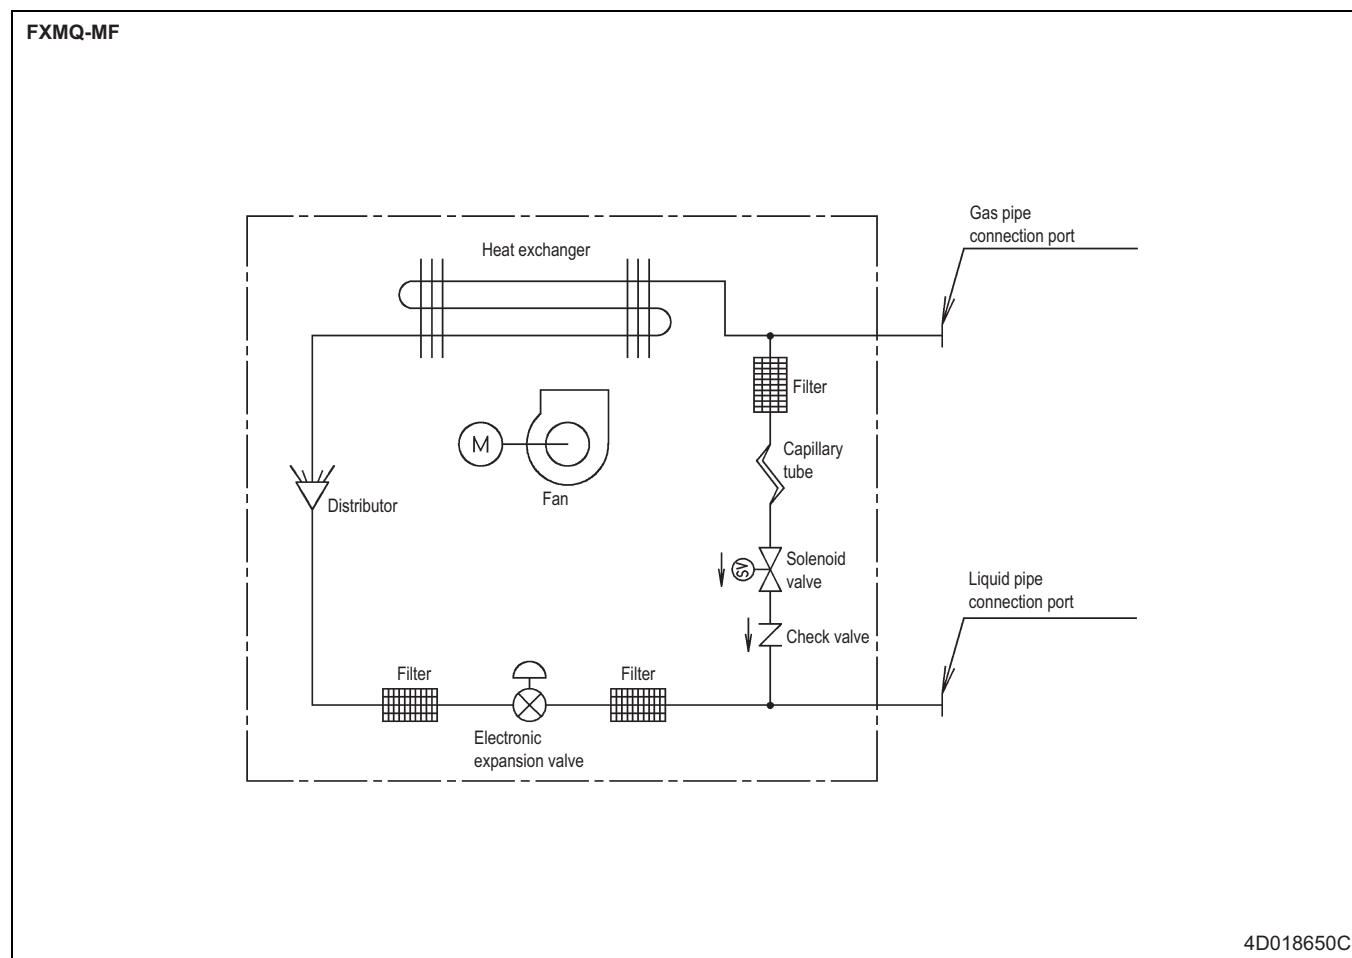

10 Wiring diagrams

10 - 1 Wiring Diagrams - Single Phase

FXMQ-MF

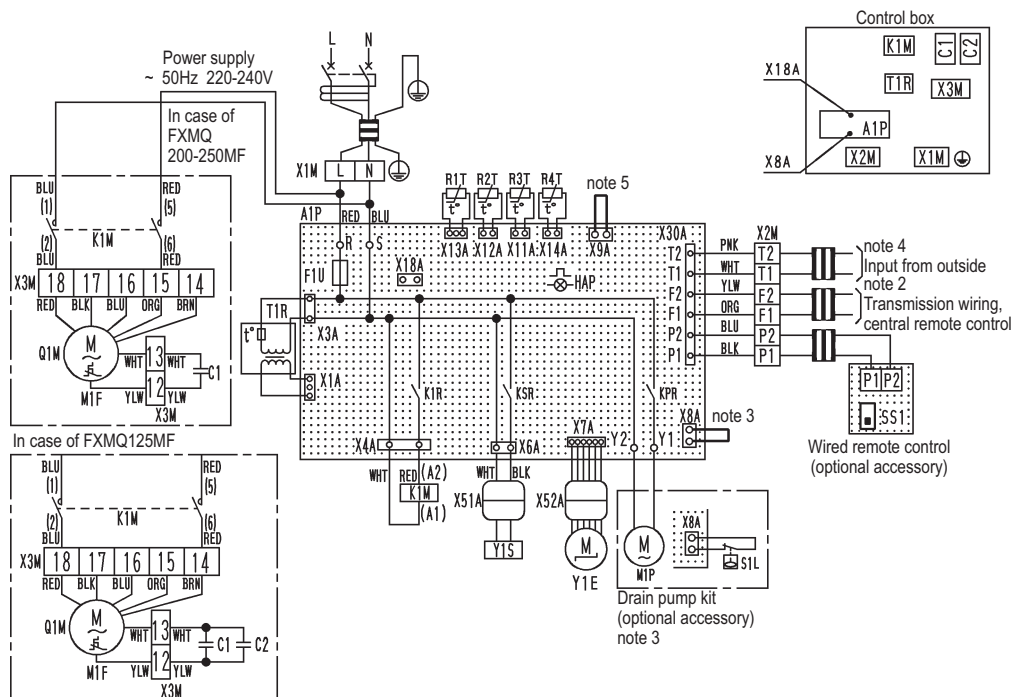

Indoor unit		R3T	Thermistor (coil, gas)	Wired remote control	
A1P	Printed circuit board	R4T	Thermistor (discharge air)	SS1	Select switch (main/sub)
C1, C2	Capacitor (M1F)	T1R	Transformer (220-240V/22V)		
F1U	Fuse (Ⓢ , 5A, 250V) (A1P)	X1M	Terminal block (power)	Connector for optional parts	
HAP	Light emitting diode (service monitor green)	X2M	Terminal block (control)	X18A	Connector (wiring adapter for electrical appendices)
K1M	Magnetic relay (M1F)	X3M	Terminal block		
K1R	Magnetic relay (M1F)	X51A, X52A	Connector		
KPR	Magnetic relay (M1P)	Y1E	Electronic expansion valve		
KSR	Magnetic relay (Y1S)	Y1S	Solenoid valve (hot gas)		
M1F	Motor (fan)				
Q1M	Thermal protector (M1F embedded 135°C)	Optional parts			
R1T	Thermistor (suction air)	M1P	Motor (drain pump)		
R2T	Thermistor (coil, liquid)	S1L	Float switch (drain pump)		
				PNK: pink	WHT: white
				YLW: yellow	ORG: orange
				BLU: blue	BLK: black
				RED: red	BRN: brown

3D044996D


NOTES

- : terminal block, □□□□ : connector, ○— : terminal, □□ : short circuit connector, — : field wiring
- In case using central remote control, connect it to the unit in accordance with the attached instruction manual.
- In case installing the drain pump kit, remove the short circuit connector of X8A and execute the additional wiring for float switch and drain pump.
- In case connecting the input wires from outside, forced off or on/off control operation can be selected by remote control, in details, refer to the installation manual attached to the unit.
- Do not remove short circuit connector of X9A.

11 Sound data

11 - 1 Sound Pressure Spectrum

FXMQ125MF

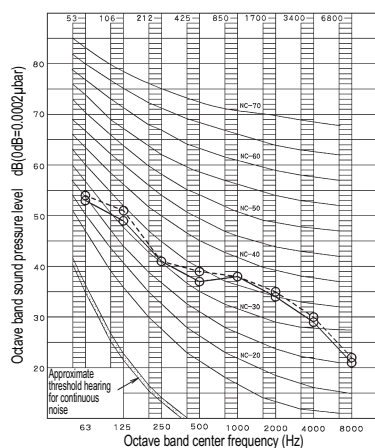


4D046271

NOTES


- Over All (dB):
(B, G, N is already rectified)
- Operating conditons:

Scale	220V	240V
A	42	43

 - Power source: 220-240V 50Hz
 - Standard condition
 - External static Pressure: 185Pa (220V), 225Pa (240V)
 - — ○ : 220 Hz
 - - - - ○ : 240 Hz
- Measuring place: Anechoic chamber
- Location of microphone



FXMQ200MF

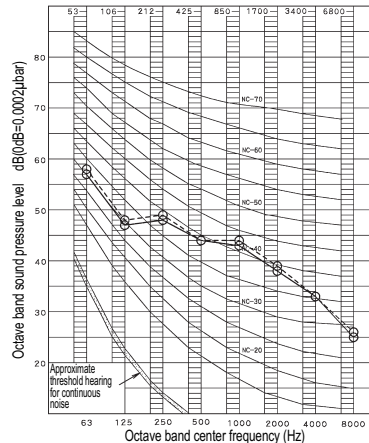


4D046272

NOTES


- Over All (dB):
(B, G, N is already rectified)
- Operating conditons:

Scale	220V	240V
A	47	48

 - Power source: 220-240V 50Hz
 - Standard condition
 - External static Pressure: 225Pa (220V), 275Pa (240V)
 - — ○ : 220 Hz
 - - - - ○ : 240 Hz
- Measuring place: Anechoic chamber
- Location of microphone



FXMQ250MF

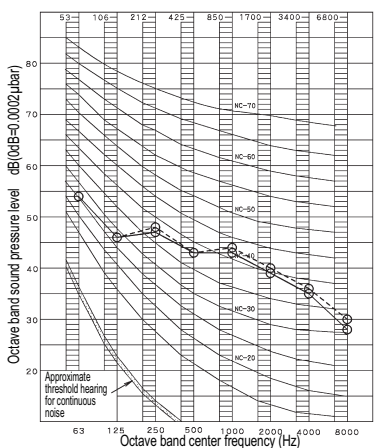


4D046273

NOTES

- Over All (dB):
(B, G, N is already rectified)
- Operating conditons:

Scale	220V	240V
A	47	48



 - Power source: 220-240V 50Hz
 - Standard condition
 - External static Pressure: 205Pa (220V), 255Pa (240V)
 - — ○ : 220 Hz
 - - - - ○ : 240 Hz
- Measuring place: Anechoic chamber
- Location of microphone



12 Fan characteristics



12 - 1 Fan Characteristics

FXMQ125MF

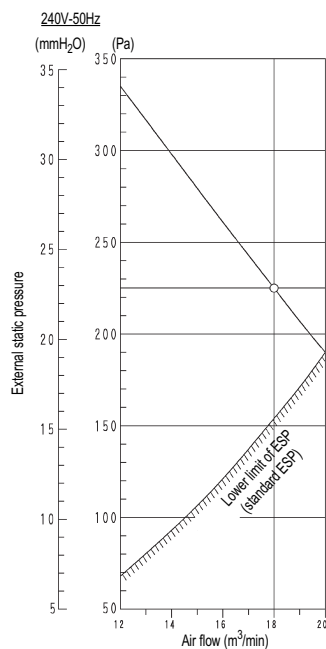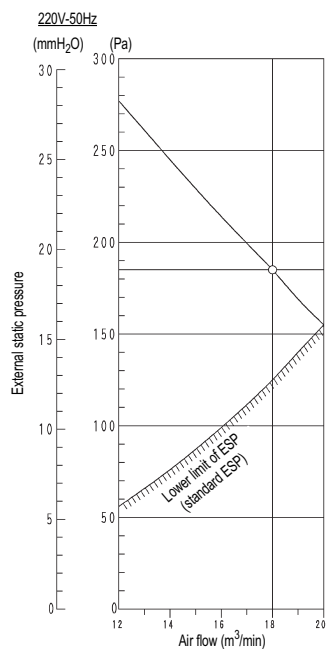

3D046267

FXMQ200MF

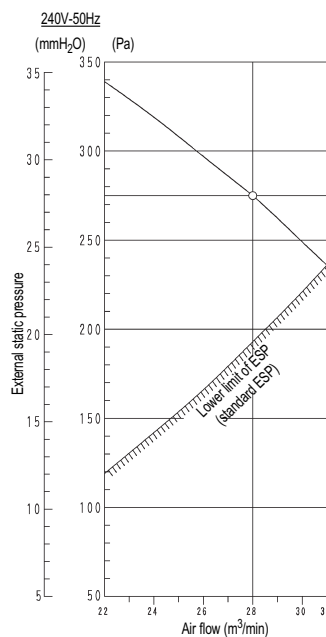
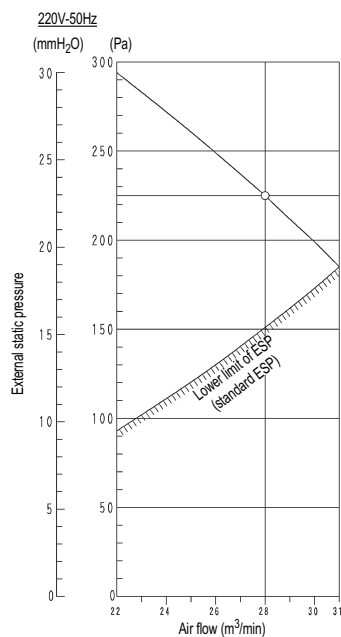


3D046266

12 Fan characteristics

12 - 1 Fan Characteristics

FXMQ250MF

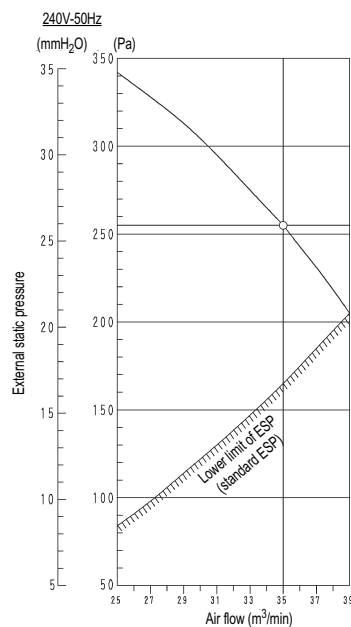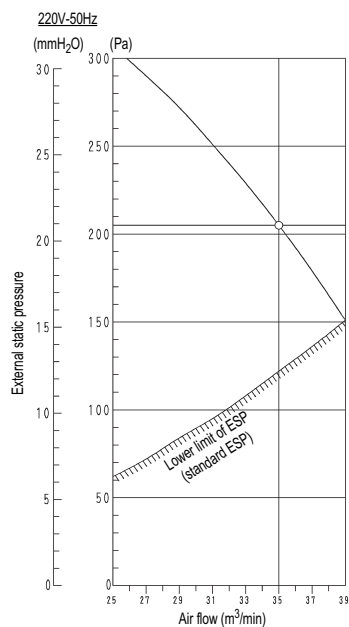


3D046265

13 Operation range

13 - 1 Operation Range

FXMQ125MF

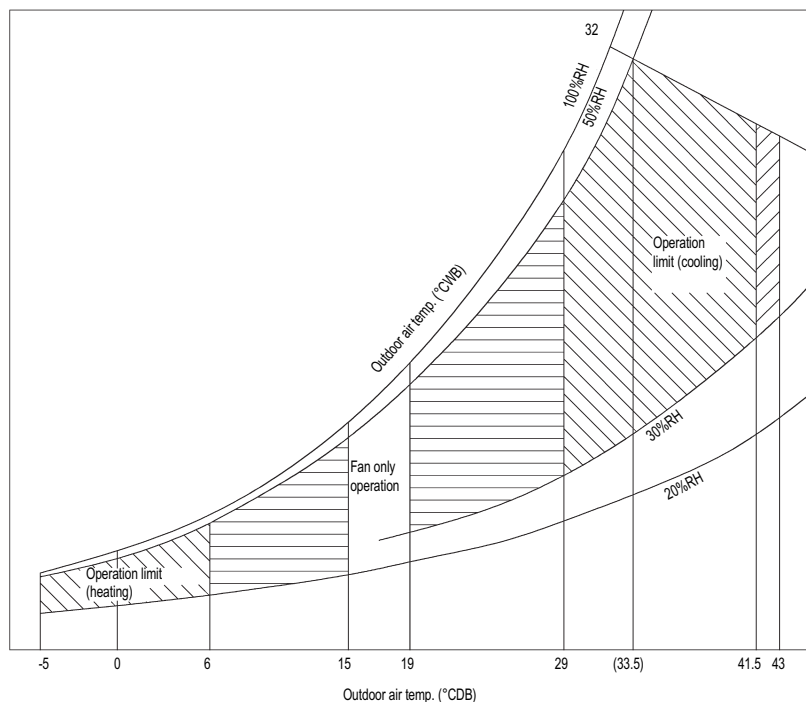


NOTES

- 1 These figures assume the following operating conditions.
(Indoor and outdoor units)
 - Equivalent piping length: 7.5m
 - Level difference: 0m
- 2 The discharge air temperature may not match the temperature setting for too large outdoor-air processing capacity. Thermostat OFF may be carried out.
- 3 The discharge air temperature may not match the temperature setting for too small outdoor-air processing capacity.
- 4 The system will not operate in fan mode when the outdoor-air temperature is 5°C below.

3D046312

FXMQ200MF

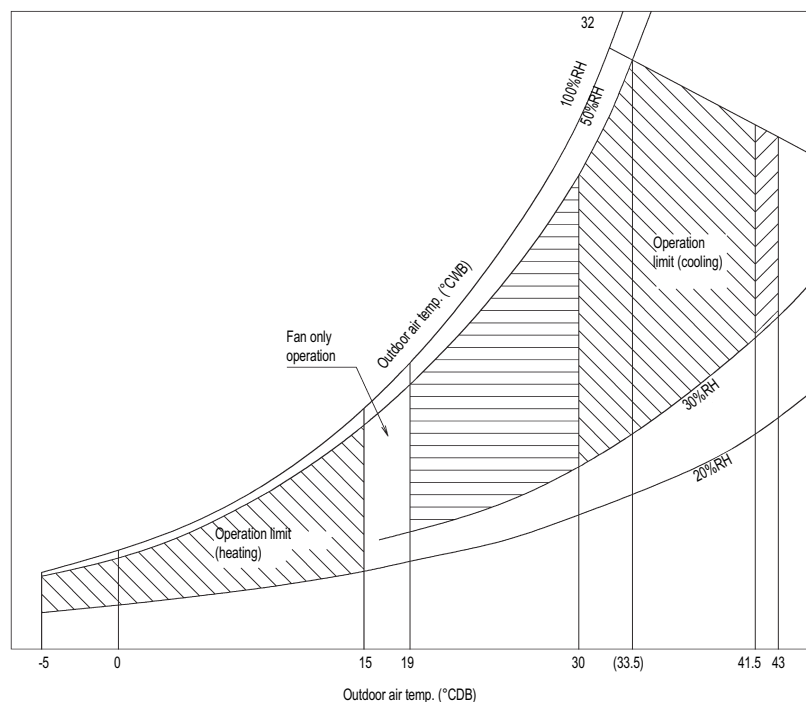

NOTES


- 1 These figures assume the following operating conditions.
(Indoor and outdoor units)
 - Equivalent piping length: 7.5m
 - Level difference: 0m
- 2 The discharge air temperature may not match the temperature setting for too large outdoor-air processing capacity. Thermostat OFF may be carried out.
- 3 The discharge air temperature may not match the temperature setting for too small outdoor-air processing capacity.
- 4 The system will not operate in fan mode when the outdoor-air temperature is 5°C below.

3D047750

13 Operation range

13 - 1 Operation Range

FXMQ250MF

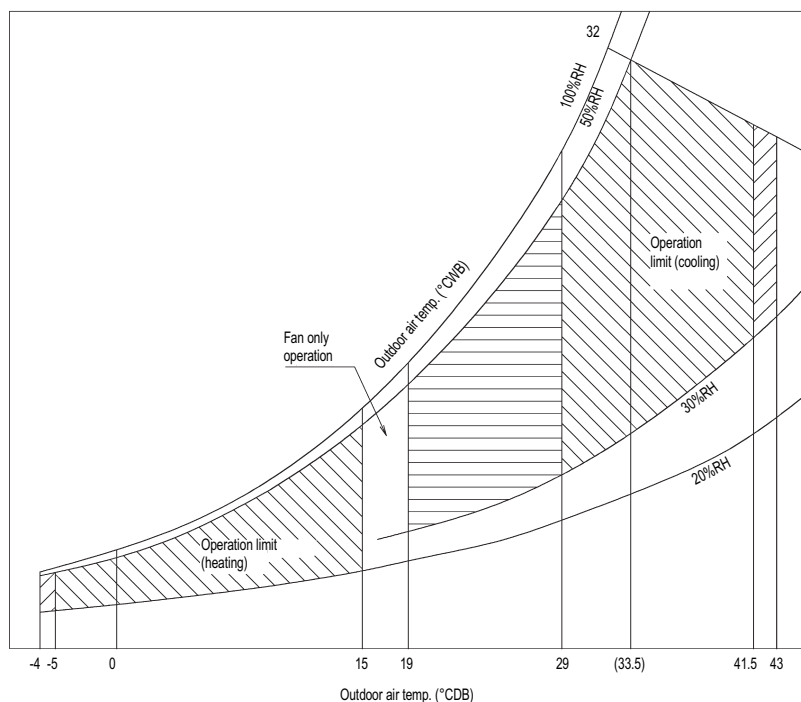

NOTES

- 1 These figures assume the following operating conditions.
(Indoor and outdoor units)
 - Equivalent piping length: 7.5m
 - Level difference: 0m
- 2 : The discharge air temperature may not match the temperature setting for too large outdoor-air processing capacity. Thermostat OFF may be carried out.
- 3 : The discharge air temperature may not match the temperature setting for too small outdoor-air processing capacity.
- 4 The system will not operate in fan mode when the outdoor-air temperature is 5°C below.

3D046313



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



VRV® products are not within the scope of the Eurovent certification programme.

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Daikin products are distributed by: