




FXL / FXN

(CONCEALED) FLOOR STANDING UNIT

- Ideal for installation beneath a window
- The floor standing unit is a mere 222mm deep and 600mm high and requires very little installation space
- Running the pipes from connections at the back, enables the unit to be wall mounted which in turn allows cleaning beneath the unit where dust tends to accumulate
- On site connection during installation is easier
- Long life filter fitted as standard
- All models are available with remote control

• The connecting port faces downward, eliminating the need to attach auxiliary piping

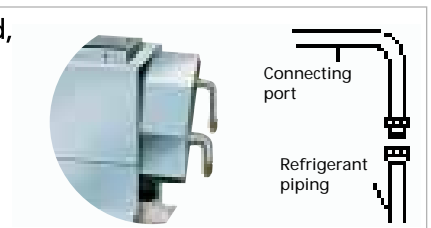

BRC1C517



BRC4C64/62



BRC2A51



BRC3A61

The ideal unit for perimeter air conditioning



FXL/FXN-LVE

				20	25	32	40	50	63
Nominal cooling capacity		kW		2.2	2.8	3.6	4.5	5.6	7.1
Nominal heating capacity		kW		2.5	3.2	4.0	5.0	6.3	8.0
Power input	Cooling	W		49		90		110	
	Heating	W		49		90		110	
Power supply				1 ~, 50Hz, 230V					
Dimensions	FXL	HxWxD	mm	600x1,000x222		600x1,140x222		600x1,420x222	
	FXN	HxWxD	mm	610x930x220		610x1,070x220		610x1,350x220	
Weight	FXL	kg		25		30		36	
	FXN	kg		19		23		27	
Colour	FXL			ivory white (5Y7.5/1)					
Casing	FXN			galvanised steel plate					
Sound pressure level - 220V	High	dB(A)		35	35	38	39	40	
	Low	dB(A)		32	32	33	34	35	
Sound power level				*	*	*	*	*	
Air flow rate	High	m³/h		420	480	660	840	960	
	Low	m³/h		360	360	510	660	720	
Air filter				resin net with mold resistant					
Temperature control				microprocessor thermostat for cooling and heating					
Piping connections	Liquid	Flare	mm	Ø6.4		Ø9.5			
	Gas	Flare	mm	Ø12.7		Ø15.9			
	Drain	mm		Ø21 external diameter (vinyl chloride)					
Sound absorbing thermal insulation				glass fiber / urethane foam					
Safety devices				PC board fuse, fan motor thermal protector					

- Notes:
- Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB
outdoor temperature: 35°CDB
equivalent refrigerant piping: 5m (horizontal)
 - Nominal heating capacities are based on: indoor temperature: 20°CDB
outdoor temperature: 7°CDB, 6°CWB
equivalent refrigerant piping: 5m (horizontal)
 - Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat
 - *Data were not available at the time of publication

ACCESSORIES

FXL/FXN-LVE

				20	25	32	40	50	63
Wired remote control				BRC1C517, BRC2A51, BRC3A61					
Infrared remote control	Cooling only			BRC4C64					
	Heat pump			BRC4C62					
Replacement long life filter				KAFJ361K28		KAFJ361K45		KAFJ361K71	