



# FXNQ-M/FXLQ-M

(Concealed)  
floor standing unit






FXLQ20,25M



FXNQ20,25M

- Ideal for installation beneath a window
- All models are available with remote control
- The floor standing model requires very little installation space
- Running the pipes from connections at the back enables the unit to be wall mounted for easy cleaning

- The connecting port faces downward, eliminating the need to attach auxiliary piping (FXNQ-M)

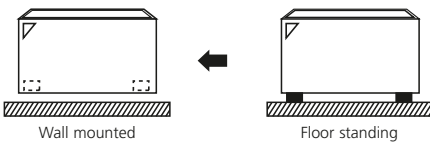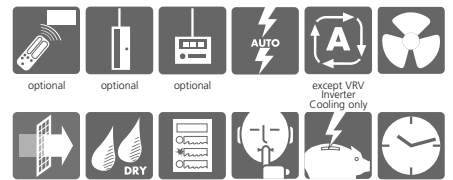

## FXNQ-MVE

INDOOR UNIT		20	25	32	40	50	63
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0
Nominal input	cooling	W	49	49	90	110	110
	heating	W	49	49	90	90	110
Dimensions (HxWxD)	mm	610x930x220		610x1,070x220		610x1,350x220	
Weight	kg	19		23		27	
Air flow rate (H/L)	m <sup>3</sup> /min	7/6	7/6	8/6	11/8.5	14/11	16/12
Sound pressure level (H/L)(220V)	dB(A)	35/32	35/32	35/32	38/33	39/34	40/35
Sound power level	dB(A)	*	*	*	*	*	*
Refrigerant type		R-410A					
Power supply	VE	1~, 50Hz, 220-240V					
Infrared remote control	cooling	BRC4C64					
	heating	BRC4C62					
Wired remote control		BRC1D527					

\* Sound power levels were not available at time of publication

## FXLQ-MVE

INDOOR UNIT		20	25	32	40	50	63
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0
Nominal input	cooling	W	49	49	90	110	110
	heating	W	49	49	90	90	110
Dimensions (HxWxD)	mm	600x1,000x222		600x1,140x222		600x1,420x222	
Weight	kg	25		30		36	
Air flow rate (H/L)	m <sup>3</sup> /min	7/6	7/6	8/6	11/8.5	14/11	16/12
Sound pressure level (H/L)(220V)	dB(A)	35/32	35/32	35/32	38/33	39/34	40/35
Sound power level	dB(A)	*	*	*	*	*	*
Refrigerant type		R-410A					
Power supply	VE	1~, 50Hz, 220-240V					
Infrared remote control	cooling	BRC4C64					
	heating	BRC4C62					
Wired remote control		BRC1D527					

\* Sound power levels were not available at time of publication