

# technical data

Concealed floor standing unit  
FXNQ-MAVE

air conditioning systems

**VRV<sup>®</sup> III-S**

**VRV<sup>®</sup> III**

**VRV<sup>®</sup> II**

**VRV<sup>®</sup>-WII**

# TABLE OF CONTENTS

## FXNQ-MAVE

|    |                                               |    |
|----|-----------------------------------------------|----|
| 1  | Specifications .....                          | 2  |
|    | Technical Specifications .....                | 2  |
|    | Electrical Specifications .....               | 3  |
| 2  | Safety device settings .....                  | 4  |
| 3  | Options .....                                 | 5  |
| 4  | Control systems .....                         | 6  |
| 5  | Capacity tables .....                         | 7  |
|    | Cooling capacity tables .....                 | 7  |
|    | Heating capacity tables .....                 | 9  |
| 6  | Dimensional drawing & centre of gravity ..... | 11 |
|    | Dimensional drawing .....                     | 11 |
|    | Centre of gravity .....                       | 13 |
| 7  | Piping diagram.....                           | 14 |
| 8  | Wiring diagram.....                           | 15 |
|    | Wiring diagram .....                          | 15 |
| 9  | Sound data.....                               | 16 |
|    | Sound pressure spectrum .....                 | 16 |
| 10 | Installation.....                             | 18 |
|    | Suspension bolt pitch position .....          | 18 |
|    | Service space .....                           | 19 |

# 1 Specifications

1

| 1-1 TECHNICAL SPECIFICATIONS |                      |               |        | FXNQ20MAVE                                                                                                                                                     | FXNQ25MAVE | FXNQ32MAVE | FXNQ40MAVE | FXNQ50MAVE | FXNQ63MAVE |
|------------------------------|----------------------|---------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|------------|
| Nominal Capacity             | Cooling              | kW            |        | 2.20                                                                                                                                                           | 2.80       | 3.60       | 4.50       | 5.60       | 7.10       |
|                              | Heating              | kW            |        | 2.50                                                                                                                                                           | 3.20       | 4.00       | 5.00       | 6.30       | 8.00       |
| Power input (Nominal)        | Cooling              | kW            |        | 0.049                                                                                                                                                          | 0.049      | 0.090      | 0.090      | 0.110      | 0.110      |
|                              | Heating              | kW            |        | 0.049                                                                                                                                                          | 0.049      | 0.090      | 0.090      | 0.110      | 0.110      |
| Casing                       | Material             |               |        | Galvanised steel                                                                                                                                               |            |            |            |            |            |
| Dimensions                   | Unit                 | Height        | mm     | 610                                                                                                                                                            | 610        | 610        | 610        | 610        | 610        |
|                              |                      | Width         | mm     | 930                                                                                                                                                            | 930        | 1070       | 1070       | 1350       | 1350       |
|                              |                      | Depth         | mm     | 220                                                                                                                                                            | 220        | 220        | 220        | 220        | 220        |
| Weight                       | Unit                 |               | kg     | 19                                                                                                                                                             | 19         | 23         | 23         | 27         | 27         |
| Heat Exchanger               | Dimensions           | Nr of Rows    |        | 3                                                                                                                                                              | 3          | 3          | 3          | 3          | 3          |
|                              |                      | Fin Pitch     | mm     | 1.50                                                                                                                                                           | 1.50       | 1.50       | 1.50       | 1.50       | 1.50       |
|                              |                      | Face Area     | m²     | 0.159                                                                                                                                                          | 0.159      | 0.200      | 0.200      | 0.282      | 0.282      |
|                              |                      | Nr of Stages  |        | 14                                                                                                                                                             | 14         | 14         | 14         | 14         | 14         |
| Fan                          | Type                 |               |        | Sirocco fan                                                                                                                                                    |            |            |            |            |            |
|                              | Quantity             |               |        | 1                                                                                                                                                              | 1          | 1          | 1          | 1          | 1          |
| Air Flow Rate                | Cooling              | High          | m³/min | 7.00                                                                                                                                                           | 7.00       | 8.00       | 11.00      | 14.00      | 16.00      |
|                              |                      | Low           | m³/min | 6.00                                                                                                                                                           | 6.00       | 6.00       | 8.50       | 11.00      | 12.00      |
| Fan                          | Motor                | Quantity      |        | 1                                                                                                                                                              | 1          | 1          | 1          | 1          | 1          |
|                              |                      | Model         |        | D14B20                                                                                                                                                         | D14B20     | 2D14B13    | 2D14B13    | 2D14B20    | 2D14B20    |
|                              |                      | Output (high) | W      | 15                                                                                                                                                             | 15         | 25         | 25         | 35         | 35         |
|                              |                      | Drive         |        | Direct drive                                                                                                                                                   |            |            |            |            |            |
| Refrigerant                  | Name                 |               |        | R-410A                                                                                                                                                         |            |            |            |            |            |
| Cooling                      | Sound Pressure       | High          | dBA    | 35.0                                                                                                                                                           | 35.0       | 35.0       | 38.0       | 39.0       | 40.0       |
|                              |                      | Low           | dBA    | 32.0                                                                                                                                                           | 32.0       | 32.0       | 33.0       | 34.0       | 35.0       |
| Piping connections           | Liquid (OD)          | Type          |        | Flare connection                                                                                                                                               |            |            |            |            |            |
|                              |                      | Diameter      | mm     | 6.4                                                                                                                                                            | 6.4        | 6.4        | 6.4        | 6.4        | 9.5        |
|                              | Gas                  | Type          |        | Flare connection                                                                                                                                               |            |            |            |            |            |
|                              |                      | Diameter      | mm     | 12.7                                                                                                                                                           | 12.7       | 12.7       | 12.7       | 12.7       | 15.9       |
|                              | Drain                | Diameter      | mm     | O.D. 21                                                                                                                                                        |            |            |            |            |            |
|                              | Heat Insulation      |               |        | Glass Fiber/Urethane Foam                                                                                                                                      |            |            |            |            |            |
| Air Filter                   |                      |               |        | Resin net with mold resistance                                                                                                                                 |            |            |            |            |            |
| Refrigerant control          |                      |               |        | Electronic expansion valve                                                                                                                                     |            |            |            |            |            |
| Temperature control          |                      |               |        | Microprocessor thermostat for cooling and heating                                                                                                              |            |            |            |            |            |
| Safety devices               |                      |               |        | PC board fuse                                                                                                                                                  |            |            |            |            |            |
|                              |                      |               |        | Fan motor thermal protector                                                                                                                                    |            |            |            |            |            |
| Standard Accessories         | Standard Accessories |               |        | Installation and operation manual                                                                                                                              |            |            |            |            |            |
|                              |                      |               |        | Insulation for fitting                                                                                                                                         |            |            |            |            |            |
|                              |                      |               |        | Drain hose                                                                                                                                                     |            |            |            |            |            |
|                              |                      |               |        | Clamps                                                                                                                                                         |            |            |            |            |            |
|                              |                      |               |        | Screws                                                                                                                                                         |            |            |            |            |            |
|                              |                      |               |        | Washer                                                                                                                                                         |            |            |            |            |            |
|                              |                      |               |        | Level adjustment screw                                                                                                                                         |            |            |            |            |            |
| Notes                        |                      |               |        | Nominal cooling capacities are based on : indoor temperature : 27°CDB, 19°CWB, outdoor temperature : 35°CDB, equivalent refrigerant piping : 7.5m (horizontal) |            |            |            |            |            |
|                              |                      |               |        | Nominal heating capacities are based on : indoor temperature : 20°CDB, outdoor temperature : 7°CDB, 6°CWB, equivalent refrigerant piping : 7.5m (horizontal)   |            |            |            |            |            |
|                              |                      |               |        | Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat.                                                     |            |            |            |            |            |
|                              |                      |               |        | Sound pressure levels are measured at 220V                                                                                                                     |            |            |            |            |            |

2

# 1 Specifications

| 1-2 ELECTRICAL SPECIFICATIONS |                            |    | FXNQ20MAVE                                                                                                                                                                                                                                                                                                                                                             | FXNQ25MAVE | FXNQ32MAVE | FXNQ40MAVE | FXNQ50MAVE | FXNQ63MAVE |
|-------------------------------|----------------------------|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|------------|
| Power Supply                  | Name                       |    | VE                                                                                                                                                                                                                                                                                                                                                                     |            |            |            |            |            |
|                               | Phase                      |    | 1                                                                                                                                                                                                                                                                                                                                                                      | 1          | 1          | 1          | 1          | 1          |
|                               | Frequency                  | Hz | 50                                                                                                                                                                                                                                                                                                                                                                     | 50         | 50         | 50         | 50         | 50         |
|                               | Voltage                    | V  | 220-240                                                                                                                                                                                                                                                                                                                                                                |            |            |            |            |            |
| Current                       | Minimum circuit amps (MCA) | A  | 0.30                                                                                                                                                                                                                                                                                                                                                                   | 0.30       | 0.60       | 0.60       | 0.60       | 0.60       |
|                               | Maximum fuse amps (MFA)    | A  | 15.00                                                                                                                                                                                                                                                                                                                                                                  | 15.00      | 15.00      | 15.00      | 15.00      | 15.00      |
|                               | Full load amps (FLA)       | A  | 0.20                                                                                                                                                                                                                                                                                                                                                                   | 0.20       | 0.50       | 0.50       | 0.50       | 0.50       |
| Voltage range                 | Minimum                    | V  | -10%                                                                                                                                                                                                                                                                                                                                                                   |            |            |            |            |            |
|                               | Maximum                    | V  | +10%                                                                                                                                                                                                                                                                                                                                                                   |            |            |            |            |            |
| Notes                         |                            |    | Voltage range : units are suitable for use on electrical systems where voltage supplied to unit terminals is not below or above listed range limits.                                                                                                                                                                                                                   |            |            |            |            |            |
|                               |                            |    | Maximum allowable voltage range variation between phases is 2%.                                                                                                                                                                                                                                                                                                        |            |            |            |            |            |
|                               |                            |    | MCA/MFA : MCA = 1.25 x FLA                                                                                                                                                                                                                                                                                                                                             |            |            |            |            |            |
|                               |                            |    | MFA ≤ 4 x FLA                                                                                                                                                                                                                                                                                                                                                          |            |            |            |            |            |
|                               |                            |    | next lower standard fuse rating minimum 15A                                                                                                                                                                                                                                                                                                                            |            |            |            |            |            |
|                               |                            |    | select wire size based on the MCA                                                                                                                                                                                                                                                                                                                                      |            |            |            |            |            |
|                               |                            |    | instead of a fuse, use a circuit breaker                                                                                                                                                                                                                                                                                                                               |            |            |            |            |            |
|                               |                            |    | For more details concerning conditional connections, see <a href="http://www.daikineurope.com/extranet">http://www.daikineurope.com/extranet</a> , select "Daikin Documentation" and select "conditional connection", "the requested product type" and "English" from the drop down lists, click the search button. Finally click on the document title of your choice |            |            |            |            |            |

## 2 Safety device settings


|                             |    | FXNQ20MA                                  | FXNQ25MA | FXNQ32MA | FXNQ40MA | FXNQ50MA | FXNQ63MA |
|-----------------------------|----|-------------------------------------------|----------|----------|----------|----------|----------|
| PC BOARD FUSE               |    | 250V 10A                                  |          |          |          |          |          |
| FAN MOTOR THERMAL PROTECTOR | °C | OFF: 135 <sup>±10</sup> / ON: 120 or less |          |          |          |          |          |
|                             |    | 3D034529C                                 |          |          |          |          |          |

2

3 Options

|                              | FXNQ20MA   | FXNQ25MA | FXNQ32MA   | FXNQ40MA | FXNQ50MA   | FXNQ63MA |
|------------------------------|------------|----------|------------|----------|------------|----------|
| LONG LIFE REPLACEMENT FILTER | KAFJ361K28 |          | KAFJ361K45 |          | KAFJ361K71 |          |

4D034574B

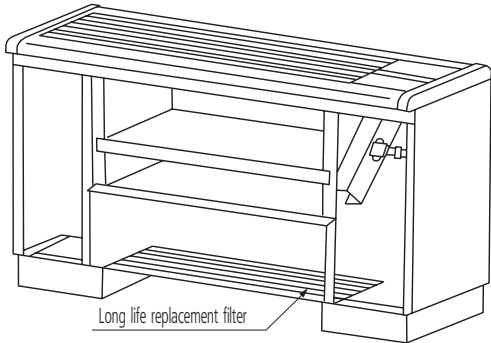

## 4 Control systems

4

### Individual control systems

|                              |              | FXNQ20MA | FXNQ25MA | FXNQ32MA | FXNQ40MA | FXNQ50MA | FXNQ63MA |
|------------------------------|--------------|----------|----------|----------|----------|----------|----------|
| WIRED REMOTE CONTROL         |              |          |          |          |          |          | BRC1D52  |
| INFRARED REMOTE CONTROL      | Heat pump    |          |          |          |          |          | BRC4C62  |
|                              | Cooling only |          |          |          |          |          | BRC4C64  |
| SIMPLIFIED REMOTE CONTROL    |              |          |          |          |          |          | BRC2A51  |
| REMOTE CONTROL FOR HOTEL USE |              |          |          |          |          |          | BRC3A61  |

### Centralised control systems

|                            |  | FXNQ20MA | FXNQ25MA | FXNQ32MA | FXNQ40MA | FXNQ50MA | FXNQ63MA  |
|----------------------------|--|----------|----------|----------|----------|----------|-----------|
| CENTRALISED REMOTE CONTROL |  |          |          |          |          |          | DCS302C51 |
| UNIFIED ON/OFF CONTROL     |  |          |          |          |          |          | DCS301C51 |
| SCHEDULE TIMER             |  |          |          |          |          |          | DST301C51 |

### Others

|                                                                          |  | FXNQ20MA | FXNQ25MA | FXNQ32MA | FXNQ40MA | FXNQ50MA | FXNQ63MA  |
|--------------------------------------------------------------------------|--|----------|----------|----------|----------|----------|-----------|
| WIRING ADAPTER                                                           |  |          |          |          |          |          | KRP1B61   |
| WIRING ADAPTER FOR ELECTRICAL APPENDICES (1)                             |  |          |          |          |          |          | KRP2A51   |
| WIRING ADAPTER FOR ELECTRICAL APPENDICES (2)                             |  |          |          |          |          |          | KRP4A51   |
| REMOTE SENSOR                                                            |  |          |          |          |          |          | KRCS01-1  |
| ELECTRICAL BOX WITH EARTH TERMINAL (3 BLOCKS)                            |  |          |          |          |          |          | KJB311A   |
| ELECTRICAL BOX WITH EARTH TERMINAL (2 BLOCKS)                            |  |          |          |          |          |          | KJB212A   |
| NOISE FILTER (FOR ELECTROMAGNETIC INTERFERENCE USE ONLY)                 |  |          |          |          |          |          | KEK26-1   |
| EXTERNAL CONTROL ADAPTER FOR OUTDOOR UNITS (INSTALLATION ON INDOOR UNIT) |  |          |          |          |          |          | DTA104A61 |

4D034581A

## 5 Capacity tables

### 5 - 1 Cooling capacity tables

| FXNQ-MA                                           |                  |                   |                        |     |        |     |        |     |        |     |        |     |        |     |        |     |
|---------------------------------------------------|------------------|-------------------|------------------------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|
| TC: Total capacity;kW - SHC: Sensible capacity;kW |                  |                   |                        |     |        |     |        |     |        |     |        |     |        |     |        |     |
| Unit size                                         | Nominal capacity | Outdoor air temp. | Indoor air temperature |     |        |     |        |     |        |     |        |     |        |     |        |     |
|                                                   |                  |                   | 14.0WB                 |     | 16.0WB |     | 18.0WB |     | 19.0WB |     | 20.0WB |     | 22.0WB |     | 24.0WB |     |
|                                                   |                  |                   | 20.0DB                 |     | 23.0DB |     | 26.0DB |     | 27.0DB |     | 28.0DB |     | 30.0DB |     | 32.0DB |     |
|                                                   |                  | °CDB              | TC                     | SHC | TC     | SHC | TC     | SHC | TC     | SHC | TC     | SHC | TC     | SHC | TC     | SHC |
| 20                                                | 2.2              | 10.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.8 | 2.6    | 1.8 | 2.9    | 1.8 |
|                                                   |                  | 12.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.8 | 2.6    | 1.8 | 2.9    | 1.7 |
|                                                   |                  | 14.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.8 | 2.6    | 1.8 | 2.8    | 1.7 |
|                                                   |                  | 16.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.8 | 2.6    | 1.8 | 2.8    | 1.7 |
|                                                   |                  | 18.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.8 | 2.6    | 1.8 | 2.7    | 1.7 |
|                                                   |                  | 20.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.8 | 2.6    | 1.8 | 2.7    | 1.6 |
|                                                   |                  | 21.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.8 | 2.6    | 1.8 | 2.7    | 1.6 |
|                                                   |                  | 23.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.8 | 2.6    | 1.8 | 2.6    | 1.6 |
|                                                   |                  | 25.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.8 | 2.6    | 1.7 | 2.6    | 1.6 |
|                                                   |                  | 27.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.8 | 2.5    | 1.7 | 2.6    | 1.6 |
|                                                   |                  | 29.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.8 | 2.5    | 1.7 | 2.5    | 1.6 |
|                                                   |                  | 31.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.8 | 2.4    | 1.7 | 2.5    | 1.6 |
|                                                   |                  | 33.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.8 | 2.4    | 1.7 | 2.5    | 1.6 |
|                                                   |                  | 35.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.7 | 2.4    | 1.6 | 2.4    | 1.5 |
|                                                   |                  | 37.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.3    | 1.7 | 2.3    | 1.6 | 2.4    | 1.6 |
|                                                   |                  | 39.0              | 1.5                    | 1.3 | 1.8    | 1.5 | 2.1    | 1.7 | 2.2    | 1.7 | 2.2    | 1.7 | 2.3    | 1.6 | 2.3    | 1.5 |
| 25                                                | 2.8              | 10.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.4    | 2.1 | 3.7    | 2.1 |
|                                                   |                  | 12.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.4    | 2.1 | 3.6    | 2.1 |
|                                                   |                  | 14.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.4    | 2.1 | 3.6    | 2.1 |
|                                                   |                  | 16.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.4    | 2.1 | 3.5    | 2.1 |
|                                                   |                  | 18.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.4    | 2.1 | 3.5    | 2.0 |
|                                                   |                  | 20.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.4    | 2.1 | 3.4    | 2.0 |
|                                                   |                  | 21.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.4    | 2.1 | 3.4    | 2.0 |
|                                                   |                  | 23.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.3    | 2.1 | 3.4    | 2.0 |
|                                                   |                  | 25.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.3    | 2.1 | 3.3    | 2.0 |
|                                                   |                  | 27.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.2    | 2.1 | 3.3    | 1.9 |
|                                                   |                  | 29.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.2    | 2.0 | 3.2    | 1.9 |
|                                                   |                  | 31.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.1    | 2.0 | 3.2    | 1.9 |
|                                                   |                  | 33.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.1    | 2.0 | 3.1    | 1.9 |
|                                                   |                  | 35.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 3.0    | 2.1 | 3.0    | 2.0 | 3.1    | 1.9 |
|                                                   |                  | 37.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 2.9    | 2.0 | 3.0    | 2.0 | 3.0    | 1.9 |
|                                                   |                  | 39.0              | 1.9                    | 1.6 | 2.3    | 1.8 | 2.6    | 2.0 | 2.8    | 2.1 | 2.9    | 2.0 | 2.9    | 2.0 | 3.0    | 1.9 |
| 32                                                | 3.6              | 10.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.6 | 4.3    | 2.6 | 4.7    | 2.6 |
|                                                   |                  | 12.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.6 | 4.3    | 2.6 | 4.7    | 2.6 |
|                                                   |                  | 14.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.6 | 4.3    | 2.6 | 4.6    | 2.6 |
|                                                   |                  | 16.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.6 | 4.3    | 2.6 | 4.6    | 2.5 |
|                                                   |                  | 18.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.6 | 4.3    | 2.6 | 4.5    | 2.5 |
|                                                   |                  | 20.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.6 | 4.3    | 2.6 | 4.4    | 2.5 |
|                                                   |                  | 21.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.6 | 4.3    | 2.6 | 4.4    | 2.5 |
|                                                   |                  | 23.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.6 | 4.2    | 2.6 | 4.3    | 2.4 |
|                                                   |                  | 25.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.6 | 4.2    | 2.6 | 4.3    | 2.4 |
|                                                   |                  | 27.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.6 | 4.1    | 2.5 | 4.2    | 2.4 |
|                                                   |                  | 29.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.6 | 4.1    | 2.5 | 4.2    | 2.4 |
|                                                   |                  | 31.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.6 | 4.0    | 2.5 | 4.1    | 2.4 |
|                                                   |                  | 33.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.6 | 3.9    | 2.4 | 4.0    | 2.3 |
|                                                   |                  | 35.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.8    | 2.5 | 3.9    | 2.4 | 4.0    | 2.3 |
|                                                   |                  | 37.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.5 | 3.7    | 2.5 | 3.8    | 2.4 | 3.9    | 2.3 |
|                                                   |                  | 39.0              | 2.4                    | 2.1 | 2.9    | 2.2 | 3.4    | 2.5 | 3.6    | 2.6 | 3.7    | 2.5 | 3.8    | 2.4 | 3.8    | 2.3 |
| 40                                                | 4.5              | 10.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.8    | 3.2 | 5.4    | 3.3 | 5.9    | 3.3 |
|                                                   |                  | 12.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.8    | 3.2 | 5.4    | 3.3 | 5.8    | 3.3 |
|                                                   |                  | 14.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.8    | 3.2 | 5.4    | 3.3 | 5.8    | 3.2 |
|                                                   |                  | 16.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.8    | 3.2 | 5.4    | 3.3 | 5.7    | 3.2 |
|                                                   |                  | 18.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.8    | 3.2 | 5.4    | 3.3 | 5.6    | 3.1 |
|                                                   |                  | 20.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.8    | 3.2 | 5.4    | 3.3 | 5.5    | 3.1 |
|                                                   |                  | 21.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.8    | 3.2 | 5.4    | 3.3 | 5.5    | 3.1 |
|                                                   |                  | 23.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.8    | 3.2 | 5.3    | 3.2 | 5.4    | 3.0 |
|                                                   |                  | 25.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.8    | 3.2 | 5.2    | 3.2 | 5.3    | 3.0 |
|                                                   |                  | 27.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.8    | 3.2 | 5.2    | 3.1 | 5.3    | 3.0 |
|                                                   |                  | 29.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.8    | 3.2 | 5.1    | 3.1 | 5.2    | 3.0 |
|                                                   |                  | 31.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.8    | 3.2 | 5.0    | 3.1 | 5.1    | 2.9 |
|                                                   |                  | 33.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.8    | 3.2 | 4.9    | 3.0 | 5.0    | 2.9 |
|                                                   |                  | 35.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.7    | 3.2 | 4.9    | 3.1 | 5.0    | 2.9 |
|                                                   |                  | 37.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.1 | 4.7    | 3.2 | 4.8    | 3.0 | 4.9    | 2.8 |
|                                                   |                  | 39.0              | 3.0                    | 2.5 | 3.6    | 2.7 | 4.2    | 3.1 | 4.5    | 3.2 | 4.6    | 3.1 | 4.7    | 3.0 | 4.8    | 2.8 |

CA03A095

## 5 Capacity tables

### 5 - 1 Cooling capacity tables

#### FXNQ-MA

TC: Total capacity/kW - SHC: Sensible capacity/kW

| Unit size | Nominal capacity | Outdoor air temp. | Indoor air temperature |     |        |     |        |     |        |     |        |     |        |     |        |     |
|-----------|------------------|-------------------|------------------------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|
|           |                  |                   | 14.0WB                 |     | 16.0WB |     | 18.0WB |     | 19.0WB |     | 20.0WB |     | 22.0WB |     | 24.0WB |     |
|           |                  |                   | 20.0DB                 |     | 23.0DB |     | 26.0DB |     | 27.0DB |     | 28.0DB |     | 30.0DB |     | 32.0DB |     |
|           |                  | °CDB              | TC                     | SHC | TC     | SHC | TC     | SHC | TC     | SHC | TC     | SHC | TC     | SHC | TC     | SHC |
| 50        | 5.6              | 10.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 6.0    | 4.0 | 6.7    | 4.1 | 7.4    | 4.1 |
|           |                  | 12.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 6.0    | 4.0 | 6.7    | 4.1 | 7.3    | 4.1 |
|           |                  | 14.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 6.0    | 4.0 | 6.7    | 4.1 | 7.2    | 4.0 |
|           |                  | 16.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 6.0    | 4.0 | 6.7    | 4.1 | 7.1    | 4.0 |
|           |                  | 18.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 6.0    | 4.0 | 6.7    | 4.1 | 7.0    | 3.9 |
|           |                  | 20.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 6.0    | 4.0 | 6.7    | 4.1 | 6.9    | 3.9 |
|           |                  | 21.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 6.0    | 4.0 | 6.7    | 4.1 | 6.8    | 3.8 |
|           |                  | 23.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 6.0    | 4.0 | 6.6    | 4.0 | 6.7    | 3.8 |
|           |                  | 25.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 6.0    | 4.0 | 6.5    | 4.0 | 6.6    | 3.7 |
|           |                  | 27.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 6.0    | 4.0 | 6.4    | 3.9 | 6.6    | 3.7 |
|           |                  | 29.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 6.0    | 4.0 | 6.3    | 3.9 | 6.5    | 3.7 |
|           |                  | 31.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 6.0    | 4.0 | 6.2    | 3.8 | 6.4    | 3.7 |
|           |                  | 33.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 6.0    | 4.0 | 6.1    | 3.8 | 6.3    | 3.6 |
|           |                  | 35.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 5.9    | 4.0 | 6.0    | 3.8 | 6.2    | 3.6 |
|           |                  | 37.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 5.8    | 3.9 | 5.9    | 3.7 | 6.1    | 3.6 |
|           |                  | 39.0              | 3.8                    | 3.0 | 4.5    | 3.4 | 5.2    | 3.8 | 5.6    | 3.9 | 5.7    | 3.9 | 5.8    | 3.7 | 6.0    | 3.5 |
| 63        | 7.1              | 10.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.6    | 5.0 | 8.5    | 5.1 | 9.3    | 5.0 |
|           |                  | 12.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.6    | 5.0 | 8.5    | 5.1 | 9.2    | 5.0 |
|           |                  | 14.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.6    | 5.0 | 8.5    | 5.1 | 9.1    | 4.9 |
|           |                  | 16.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.6    | 5.0 | 8.5    | 5.1 | 9.0    | 4.8 |
|           |                  | 18.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.6    | 5.0 | 8.5    | 5.1 | 8.8    | 4.8 |
|           |                  | 20.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.6    | 5.0 | 8.5    | 5.1 | 8.7    | 4.7 |
|           |                  | 21.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.6    | 5.0 | 8.5    | 5.1 | 8.7    | 4.7 |
|           |                  | 23.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.6    | 5.0 | 8.4    | 5.0 | 8.5    | 4.6 |
|           |                  | 25.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.6    | 5.0 | 8.3    | 5.0 | 8.4    | 4.5 |
|           |                  | 27.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.6    | 5.0 | 8.1    | 4.9 | 8.3    | 4.5 |
|           |                  | 29.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.6    | 5.0 | 8.0    | 4.8 | 8.2    | 4.5 |
|           |                  | 31.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.6    | 5.0 | 7.9    | 4.7 | 8.1    | 4.4 |
|           |                  | 33.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.6    | 5.0 | 7.8    | 4.7 | 7.9    | 4.4 |
|           |                  | 35.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.5    | 4.9 | 7.7    | 4.7 | 7.8    | 4.3 |
|           |                  | 37.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.4    | 4.9 | 7.5    | 4.6 | 7.7    | 4.2 |
|           |                  | 39.0              | 4.8                    | 3.7 | 5.7    | 4.2 | 6.6    | 4.8 | 7.1    | 4.9 | 7.2    | 4.8 | 7.4    | 4.6 | 7.6    | 4.2 |

CA03A095

## 5 Capacity tables

### 5 - 2 Heating capacity tables

| FXNQ-MA   |                  |                         |       |                             |      |      |      |      |      |
|-----------|------------------|-------------------------|-------|-----------------------------|------|------|------|------|------|
| Unit Size | Nominal capacity | Outdoor air temperature |       | Indoor air temperature °CDB |      |      |      |      |      |
|           |                  |                         |       | 16.0                        | 18.0 | 20.0 | 21.0 | 22.0 | 24.0 |
|           |                  | °CDB                    | °CWB  | kW                          | kW   | kW   | kW   | kW   | kW   |
| 20        | 2.5              | -19.8                   | -20.0 | 1.5                         | 1.5  | 1.5  | 1.5  | 1.5  | 1.5  |
|           |                  | -18.8                   | -19.0 | 1.5                         | 1.5  | 1.5  | 1.5  | 1.5  | 1.5  |
|           |                  | -16.7                   | -17.0 | 1.6                         | 1.6  | 1.6  | 1.6  | 1.6  | 1.6  |
|           |                  | -14.7                   | -15.0 | 1.7                         | 1.7  | 1.7  | 1.7  | 1.7  | 1.7  |
|           |                  | -12.6                   | -13.0 | 1.8                         | 1.8  | 1.8  | 1.8  | 1.8  | 1.8  |
|           |                  | -10.5                   | -11.0 | 1.9                         | 1.9  | 1.9  | 1.9  | 1.9  | 1.9  |
|           |                  | -9.5                    | -10.0 | 1.9                         | 1.9  | 1.9  | 1.9  | 1.9  | 1.9  |
|           |                  | -8.5                    | -9.1  | 2.0                         | 2.0  | 1.9  | 1.9  | 1.9  | 1.9  |
|           |                  | -7.0                    | -7.6  | 2.0                         | 2.0  | 2.0  | 2.0  | 2.0  | 2.0  |
|           |                  | -5.0                    | -5.6  | 2.1                         | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
|           |                  | -3.0                    | -3.7  | 2.2                         | 2.2  | 2.2  | 2.2  | 2.2  | 2.2  |
|           |                  | 0.0                     | -0.7  | 2.3                         | 2.3  | 2.3  | 2.3  | 2.3  | 2.2  |
|           |                  | 3.0                     | 2.2   | 2.5                         | 2.5  | 2.4  | 2.4  | 2.3  | 2.2  |
|           |                  | 5.0                     | 4.1   | 2.5                         | 2.5  | 2.5  | 2.4  | 2.3  | 2.2  |
|           |                  | 7.0                     | 6.0   | 2.6                         | 2.6  | 2.5  | 2.4  | 2.3  | 2.2  |
|           |                  | 9.0                     | 7.9   | 2.7                         | 2.7  | 2.5  | 2.4  | 2.3  | 2.2  |
|           |                  | 11.0                    | 9.8   | 2.8                         | 2.7  | 2.5  | 2.4  | 2.3  | 2.2  |
|           |                  | 13.0                    | 11.8  | 2.8                         | 2.7  | 2.5  | 2.4  | 2.3  | 2.2  |
|           |                  | 15.0                    | 13.7  | 2.8                         | 2.7  | 2.5  | 2.4  | 2.3  | 2.2  |
| 25        | 3.2              | -19.8                   | -20.0 | 1.9                         | 1.9  | 1.9  | 1.9  | 1.9  | 1.9  |
|           |                  | -18.8                   | -19.0 | 1.9                         | 1.9  | 1.9  | 1.9  | 1.9  | 1.9  |
|           |                  | -16.7                   | -17.0 | 2.1                         | 2.1  | 2.0  | 2.0  | 2.0  | 2.0  |
|           |                  | -14.7                   | -15.0 | 2.2                         | 2.2  | 2.2  | 2.2  | 2.2  | 2.1  |
|           |                  | -12.6                   | -13.0 | 2.3                         | 2.3  | 2.3  | 2.3  | 2.3  | 2.3  |
|           |                  | -10.5                   | -11.0 | 2.4                         | 2.4  | 2.4  | 2.4  | 2.4  | 2.4  |
|           |                  | -9.5                    | -10.0 | 2.5                         | 2.4  | 2.4  | 2.4  | 2.4  | 2.4  |
|           |                  | -8.5                    | -9.1  | 2.5                         | 2.5  | 2.5  | 2.5  | 2.5  | 2.5  |
|           |                  | -7.0                    | -7.6  | 2.6                         | 2.6  | 2.6  | 2.6  | 2.6  | 2.6  |
|           |                  | -5.0                    | -5.6  | 2.7                         | 2.7  | 2.7  | 2.7  | 2.7  | 2.7  |
|           |                  | -3.0                    | -3.7  | 2.8                         | 2.8  | 2.8  | 2.8  | 2.8  | 2.8  |
|           |                  | 0.0                     | -0.7  | 3.0                         | 3.0  | 3.0  | 3.0  | 3.0  | 2.8  |
|           |                  | 3.0                     | 2.2   | 3.1                         | 3.1  | 3.1  | 3.1  | 3.0  | 2.8  |
|           |                  | 5.0                     | 4.1   | 3.3                         | 3.2  | 3.2  | 3.1  | 3.0  | 2.8  |
|           |                  | 7.0                     | 6.0   | 3.4                         | 3.4  | 3.2  | 3.1  | 3.0  | 2.8  |
|           |                  | 9.0                     | 7.9   | 3.5                         | 3.4  | 3.2  | 3.1  | 3.0  | 2.8  |
|           |                  | 11.0                    | 9.8   | 3.6                         | 3.4  | 3.2  | 3.1  | 3.0  | 2.8  |
|           |                  | 13.0                    | 11.8  | 3.6                         | 3.4  | 3.2  | 3.1  | 3.0  | 2.8  |
|           |                  | 15.0                    | 13.7  | 3.6                         | 3.4  | 3.2  | 3.1  | 3.0  | 2.8  |
| 32        | 4.0              | -19.8                   | -20.0 | 2.4                         | 2.4  | 2.3  | 2.3  | 2.3  | 2.3  |
|           |                  | -18.8                   | -19.0 | 2.4                         | 2.4  | 2.4  | 2.4  | 2.4  | 2.4  |
|           |                  | -16.7                   | -17.0 | 2.6                         | 2.6  | 2.6  | 2.6  | 2.6  | 2.5  |
|           |                  | -14.7                   | -15.0 | 2.7                         | 2.7  | 2.7  | 2.7  | 2.7  | 2.7  |
|           |                  | -12.6                   | -13.0 | 2.9                         | 2.8  | 2.8  | 2.8  | 2.8  | 2.8  |
|           |                  | -10.5                   | -11.0 | 3.0                         | 3.0  | 3.0  | 3.0  | 3.0  | 3.0  |
|           |                  | -9.5                    | -10.0 | 3.1                         | 3.1  | 3.1  | 3.1  | 3.0  | 3.0  |
|           |                  | -8.5                    | -9.1  | 3.1                         | 3.1  | 3.1  | 3.1  | 3.1  | 3.1  |
|           |                  | -7.0                    | -7.6  | 3.2                         | 3.2  | 3.2  | 3.2  | 3.2  | 3.2  |
|           |                  | -5.0                    | -5.6  | 3.4                         | 3.4  | 3.4  | 3.4  | 3.4  | 3.4  |
|           |                  | -3.0                    | -3.7  | 3.5                         | 3.5  | 3.5  | 3.5  | 3.5  | 3.5  |
|           |                  | 0.0                     | -0.7  | 3.7                         | 3.7  | 3.7  | 3.7  | 3.7  | 3.5  |
|           |                  | 3.0                     | 2.2   | 3.9                         | 3.9  | 3.9  | 3.9  | 3.7  | 3.5  |
|           |                  | 5.0                     | 4.1   | 4.1                         | 4.1  | 4.0  | 3.9  | 3.7  | 3.5  |
|           |                  | 7.0                     | 6.0   | 4.2                         | 4.2  | 4.0  | 3.9  | 3.7  | 3.5  |
|           |                  | 9.0                     | 7.9   | 4.3                         | 4.3  | 4.0  | 3.9  | 3.7  | 3.5  |
|           |                  | 11.0                    | 9.8   | 4.5                         | 4.3  | 4.0  | 3.9  | 3.7  | 3.5  |
|           |                  | 13.0                    | 11.8  | 4.5                         | 4.3  | 4.0  | 3.9  | 3.7  | 3.5  |
|           |                  | 15.0                    | 13.7  | 4.5                         | 4.3  | 4.0  | 3.9  | 3.7  | 3.5  |
| 40        | 5.0              | -19.8                   | -20.0 | 3.0                         | 2.9  | 2.9  | 2.9  | 2.9  | 2.9  |
|           |                  | -18.8                   | -19.0 | 3.0                         | 3.0  | 3.0  | 3.0  | 3.0  | 3.0  |
|           |                  | -16.7                   | -17.0 | 3.2                         | 3.2  | 3.2  | 3.2  | 3.2  | 3.2  |
|           |                  | -14.7                   | -15.0 | 3.4                         | 3.4  | 3.4  | 3.4  | 3.4  | 3.4  |
|           |                  | -12.6                   | -13.0 | 3.6                         | 3.6  | 3.6  | 3.5  | 3.5  | 3.5  |
|           |                  | -10.5                   | -11.0 | 3.7                         | 3.7  | 3.7  | 3.7  | 3.7  | 3.7  |
|           |                  | -9.5                    | -10.0 | 3.8                         | 3.8  | 3.8  | 3.8  | 3.8  | 3.8  |
|           |                  | -8.5                    | -9.1  | 3.9                         | 3.9  | 3.9  | 3.9  | 3.9  | 3.9  |
|           |                  | -7.0                    | -7.6  | 4.0                         | 4.0  | 4.0  | 4.0  | 4.0  | 4.0  |
|           |                  | -5.0                    | -5.6  | 4.2                         | 4.2  | 4.2  | 4.2  | 4.2  | 4.2  |
|           |                  | -3.0                    | -3.7  | 4.4                         | 4.4  | 4.4  | 4.4  | 4.4  | 4.4  |
|           |                  | 0.0                     | -0.7  | 4.7                         | 4.6  | 4.6  | 4.6  | 4.6  | 4.4  |
|           |                  | 3.0                     | 2.2   | 4.9                         | 4.9  | 4.9  | 4.8  | 4.7  | 4.4  |
|           |                  | 5.0                     | 4.1   | 5.1                         | 5.1  | 5.0  | 4.8  | 4.7  | 4.4  |
|           |                  | 7.0                     | 6.0   | 5.2                         | 5.2  | 5.0  | 4.8  | 4.7  | 4.4  |
|           |                  | 9.0                     | 7.9   | 5.4                         | 5.3  | 5.0  | 4.8  | 4.7  | 4.4  |
|           |                  | 11.0                    | 9.8   | 5.6                         | 5.3  | 5.0  | 4.8  | 4.7  | 4.4  |
|           |                  | 13.0                    | 11.8  | 5.6                         | 5.3  | 5.0  | 4.8  | 4.7  | 4.4  |
|           |                  | 15.0                    | 13.7  | 5.6                         | 5.3  | 5.0  | 4.8  | 4.7  | 4.4  |

CA03A095

## 5 Capacity tables

### 5 - 2 Heating capacity tables

5

#### FXNQ-MA


| Unit Size | Nominal capacity | Outdoor air temperature |       | Indoor air temperature °CDB |      |      |      |      |      |
|-----------|------------------|-------------------------|-------|-----------------------------|------|------|------|------|------|
|           |                  | °CDB                    | °CWB  | 16.0                        | 18.0 | 20.0 | 21.0 | 22.0 | 24.0 |
|           |                  |                         |       | kW                          | kW   | kW   | kW   | kW   | kW   |
| 50        | 63               | -19.8                   | -20.0 | 3.7                         | 3.7  | 3.7  | 3.7  | 3.7  | 3.7  |
|           |                  | -18.8                   | -19.0 | 3.8                         | 3.8  | 3.8  | 3.8  | 3.8  | 3.8  |
|           |                  | -16.7                   | -17.0 | 4.1                         | 4.0  | 4.0  | 4.0  | 4.0  | 4.0  |
|           |                  | -14.7                   | -15.0 | 4.3                         | 4.3  | 4.3  | 4.2  | 4.2  | 4.2  |
|           |                  | -12.6                   | -13.0 | 4.5                         | 4.5  | 4.5  | 4.5  | 4.5  | 4.5  |
|           |                  | -10.5                   | -11.0 | 4.7                         | 4.7  | 4.7  | 4.7  | 4.7  | 4.7  |
|           |                  | -9.5                    | -10.0 | 4.8                         | 4.8  | 4.8  | 4.8  | 4.8  | 4.8  |
|           |                  | -8.5                    | -9.1  | 4.9                         | 4.9  | 4.9  | 4.9  | 4.9  | 4.9  |
|           |                  | -7.0                    | -7.6  | 5.1                         | 5.1  | 5.1  | 5.1  | 5.1  | 5.1  |
|           |                  | -5.0                    | -5.6  | 5.3                         | 5.3  | 5.3  | 5.3  | 5.3  | 5.3  |
|           |                  | -3.0                    | -3.7  | 5.5                         | 5.5  | 5.5  | 5.5  | 5.5  | 5.5  |
|           |                  | 0.0                     | -0.7  | 5.9                         | 5.9  | 5.8  | 5.8  | 5.8  | 5.5  |
|           |                  | 3.0                     | 2.2   | 6.2                         | 6.2  | 6.2  | 6.1  | 5.9  | 5.5  |
|           |                  | 5.0                     | 4.1   | 6.4                         | 6.4  | 6.3  | 6.1  | 5.9  | 5.5  |
|           |                  | 7.0                     | 6.0   | 6.6                         | 6.6  | 6.3  | 6.1  | 5.9  | 5.5  |
|           |                  | 9.0                     | 7.9   | 6.8                         | 6.7  | 6.3  | 6.1  | 5.9  | 5.5  |
|           |                  | 11.0                    | 9.8   | 7.0                         | 6.7  | 6.3  | 6.1  | 5.9  | 5.5  |
|           |                  | 13.0                    | 11.8  | 7.1                         | 6.7  | 6.3  | 6.1  | 5.9  | 5.5  |
|           |                  | 15.0                    | 13.7  | 7.1                         | 6.7  | 6.3  | 6.1  | 5.9  | 5.5  |
| 63        | 8.0              | -19.8                   | -20.0 | 4.7                         | 4.7  | 4.7  | 4.7  | 4.7  | 4.7  |
|           |                  | -18.8                   | -19.0 | 4.9                         | 4.9  | 4.8  | 4.8  | 4.8  | 4.8  |
|           |                  | -16.7                   | -17.0 | 5.1                         | 5.1  | 5.1  | 5.1  | 5.1  | 5.1  |
|           |                  | -14.7                   | -15.0 | 5.4                         | 5.4  | 5.4  | 5.4  | 5.4  | 5.4  |
|           |                  | -12.6                   | -13.0 | 5.7                         | 5.7  | 5.7  | 5.7  | 5.7  | 5.7  |
|           |                  | -10.5                   | -11.0 | 6.0                         | 6.0  | 6.0  | 6.0  | 6.0  | 5.9  |
|           |                  | -9.5                    | -10.0 | 6.1                         | 6.1  | 6.1  | 6.1  | 6.1  | 6.1  |
|           |                  | -8.5                    | -9.1  | 6.3                         | 6.3  | 6.2  | 6.2  | 6.2  | 6.2  |
|           |                  | -7.0                    | -7.6  | 6.5                         | 6.5  | 6.4  | 6.4  | 6.4  | 6.4  |
|           |                  | -5.0                    | -5.6  | 6.8                         | 6.7  | 6.7  | 6.7  | 6.7  | 6.7  |
|           |                  | -3.0                    | -3.7  | 7.0                         | 7.0  | 7.0  | 7.0  | 7.0  | 7.0  |
|           |                  | 0.0                     | -0.7  | 7.5                         | 7.4  | 7.4  | 7.4  | 7.4  | 7.0  |
|           |                  | 3.0                     | 2.2   | 7.9                         | 7.8  | 7.8  | 7.7  | 7.5  | 7.0  |
|           |                  | 5.0                     | 4.1   | 8.1                         | 8.1  | 8.0  | 7.7  | 7.5  | 7.0  |
|           |                  | 7.0                     | 6.0   | 8.4                         | 8.4  | 8.0  | 7.7  | 7.5  | 7.0  |
|           |                  | 9.0                     | 7.9   | 8.7                         | 8.5  | 8.0  | 7.7  | 7.5  | 7.0  |
|           |                  | 11.0                    | 9.8   | 8.9                         | 8.5  | 8.0  | 7.7  | 7.5  | 7.0  |
|           |                  | 13.0                    | 11.8  | 9.0                         | 8.5  | 8.0  | 7.7  | 7.5  | 7.0  |
|           |                  | 15.0                    | 13.7  | 9.0                         | 8.5  | 8.0  | 7.7  | 7.5  | 7.0  |

CA03A095

## 6 Dimensional drawing & centre of gravity

### 6 - 1 Dimensional drawing

#### FXNQ20,25MA

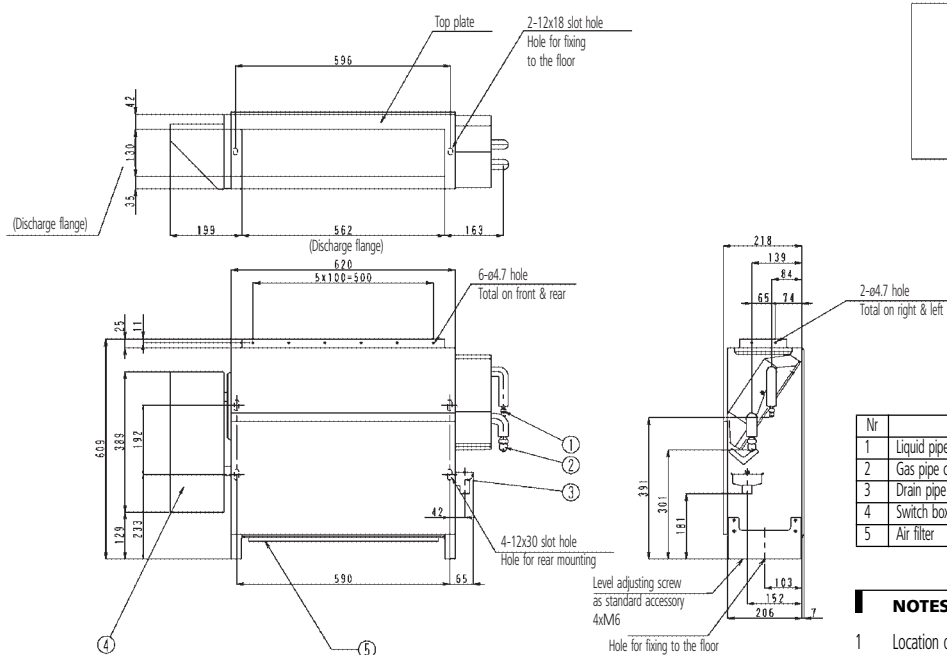


| Nr | Part name                   | Description            |
|----|-----------------------------|------------------------|
| 1  | Liquid pipe connection port | ø6.4 flare connection  |
| 2  | Gas pipe connection port    | ø12.7 flare connection |
| 3  | Drain pipe connection port  | O.D. 21                |
| 4  | Switch box                  |                        |
| 5  | Air filter                  |                        |

#### NOTES

- 1 Location of unit's name plate: right lower corner of front plate.

3D038863A

#### FXNQ32,40MA

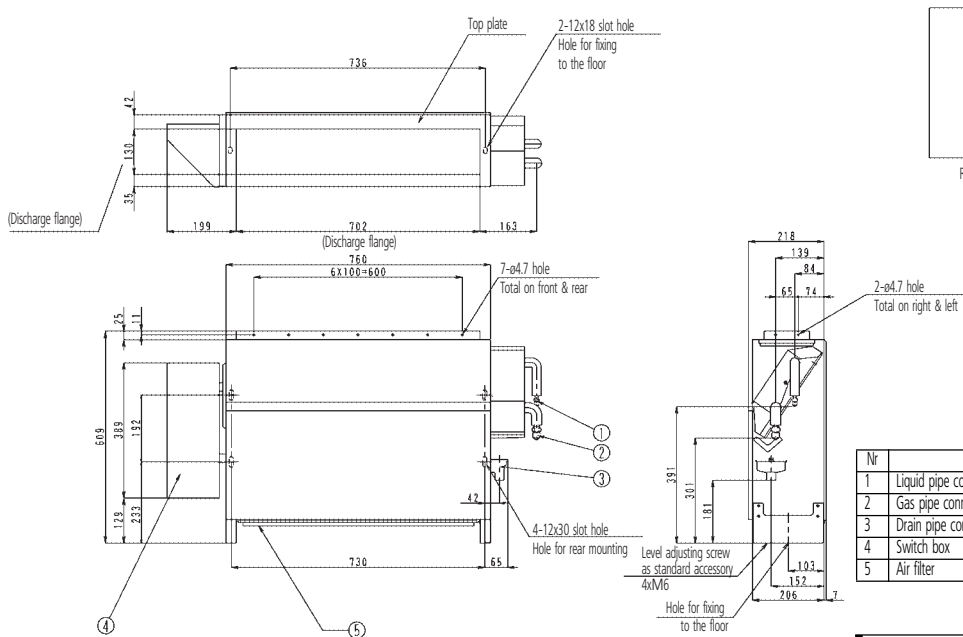

| Nr | Part name                   | Description            |
|----|-----------------------------|------------------------|
| 1  | Liquid pipe connection port | ø6.4 flare connection  |
| 2  | Gas pipe connection port    | ø12.7 flare connection |
| 3  | Drain pipe connection port  | O.D. 21                |
| 4  | Switch box                  |                        |
| 5  | Air filter                  |                        |

#### NOTES


- 1 Location of unit's name plate: right lower corner of front plate.

3D038864B

## 6 Dimensional drawing & centre of gravity

### 6 - 1 Dimensional drawing

FXNQ50,63MA

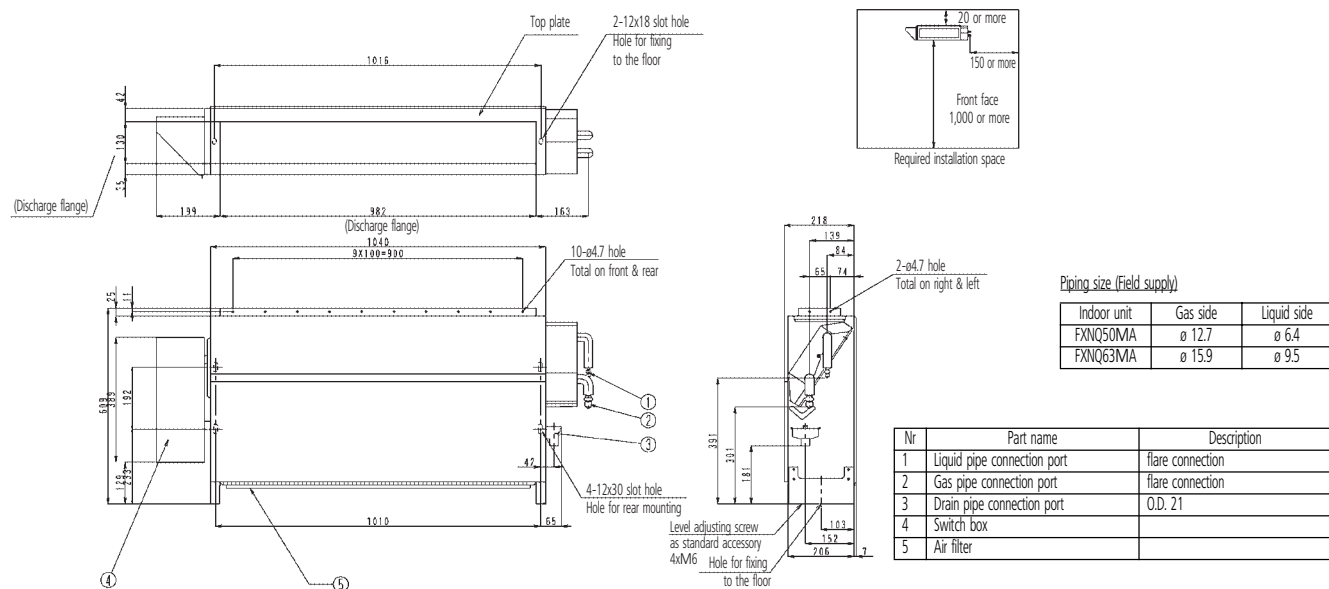


#### NOTES

- Location of unit's name plate: right lower corner of front plate.


3D038865B

## 6 Dimensional drawing & centre of gravity

### 6 - 2 Centre of gravity

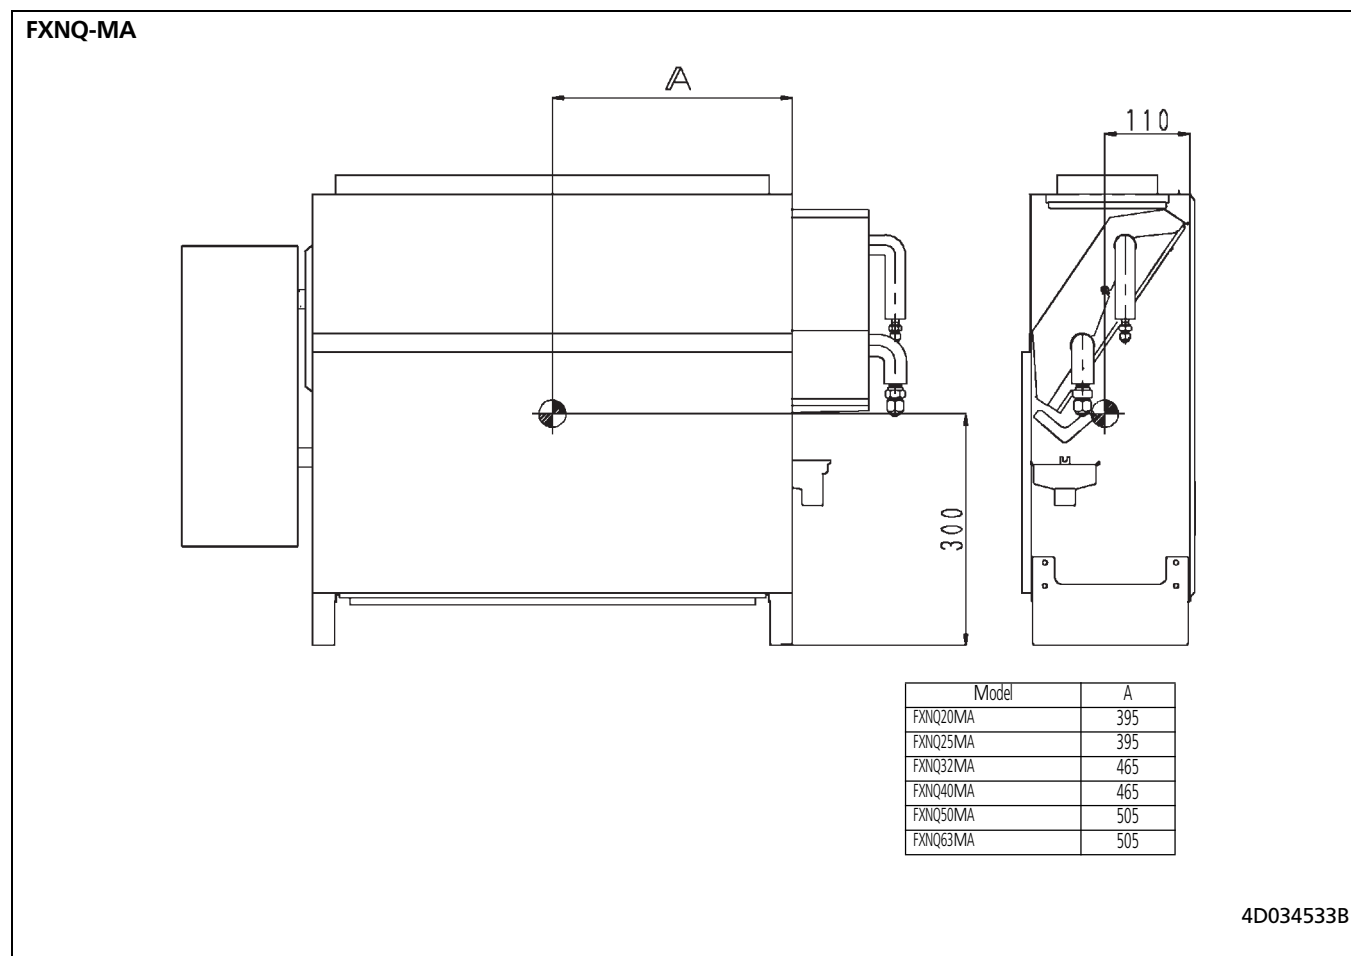


## 7 Piping diagram

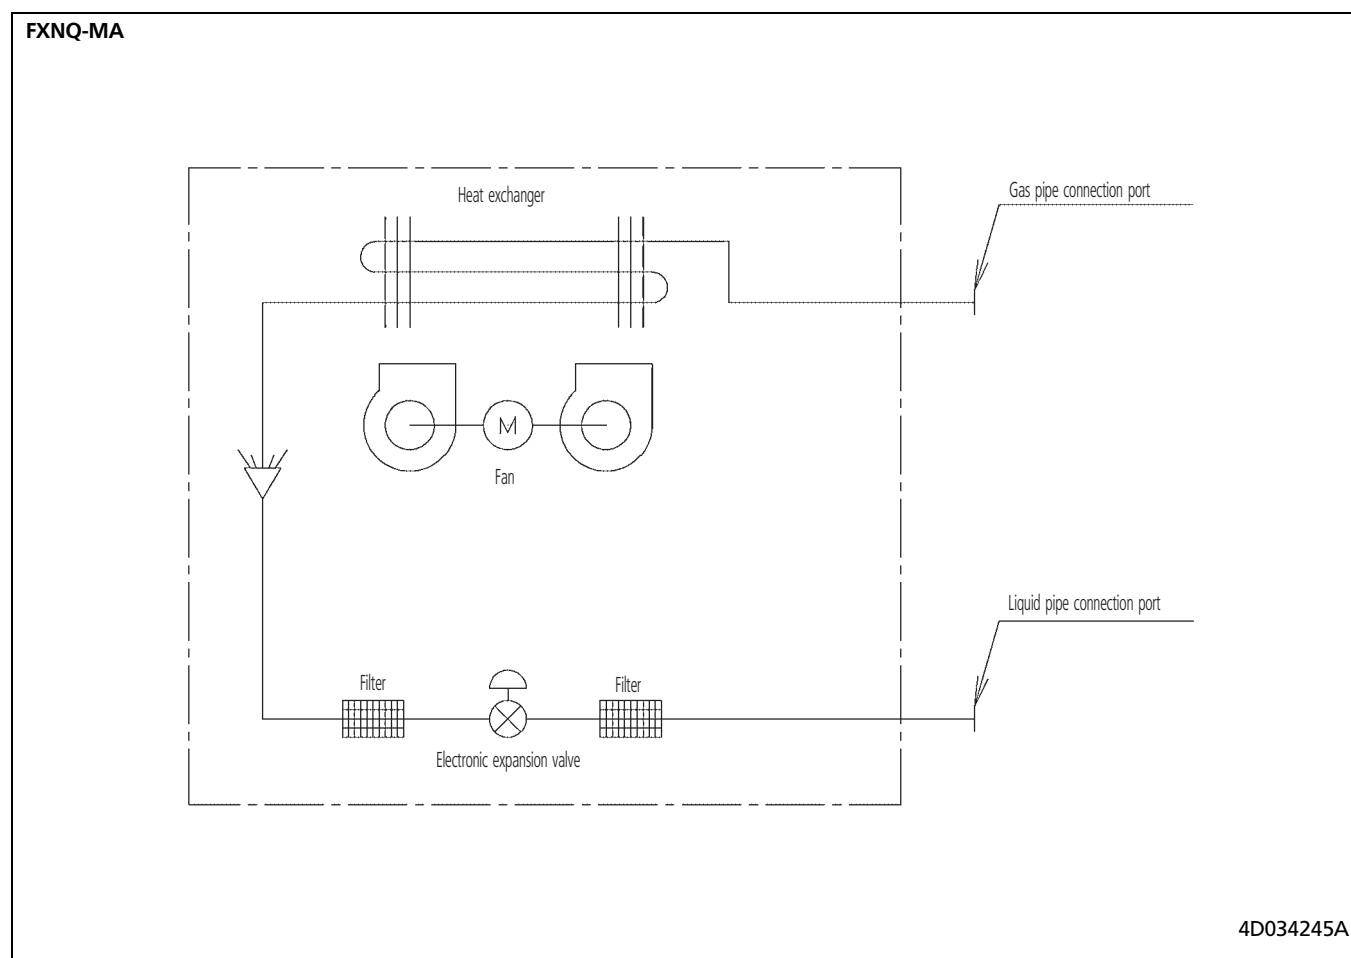

## 8 Wiring diagram

### 8 - 1 Wiring diagram

FXNQ-MA

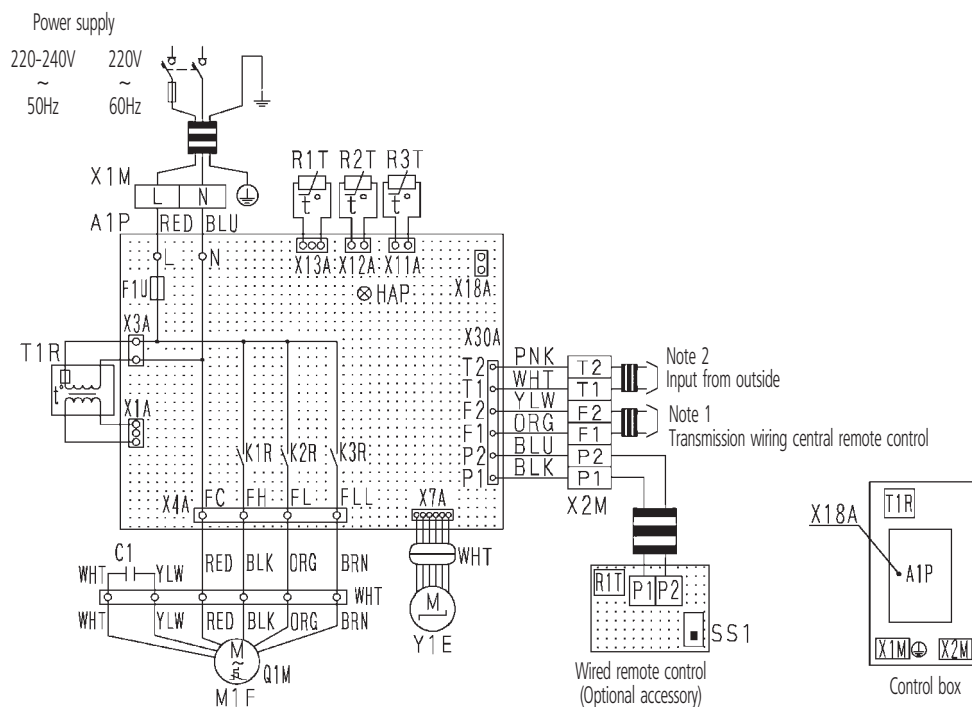

| Indoor unit |                                              | R2T • R3T                    | Thermistor (Coil)                                    |
|-------------|----------------------------------------------|------------------------------|------------------------------------------------------|
| A1P         | Printed circuit board                        | T1R                          | Transformer (220-240V/22V)                           |
| C1          | Capacitor (M1F)                              | X1M                          | Terminal block (Power)                               |
| F1U         | Fuse (5A, 250V)                              | X2M                          | Terminal block (Control)                             |
| HAP         | Light emitting diode (Service monitor-green) | Y1E                          | Electronic expansion valve                           |
| K1R-K3R     | Magnetic relay (M1F)                         | Wired remote control         |                                                      |
| M1F         | Motor (Indoor fan)                           | R1T                          | Thermistor (Air)                                     |
| Q1M         | Thermo switch (M1F embedded)                 | SS1                          | Selector switch (Main/sub)                           |
| R1T         | Thermistor (Air)                             | Connector for optional parts |                                                      |
|             |                                              | X18A                         | Connector (Wiring adapter for electrical appendices) |

: Terminal block  
 : Connector  
 : Terminal  
 : Field wiring

COLORS : BLK : Black      PNK : Pink  
              BLU : Blue        RED : Red  
              BRN : Brown      WHT : White  
              ORG : Orange      YLW : Yellow

#### NOTES

- In case using central remote control, connect it to the unit in accordance with the attached instruction manual.
- When connecting the input wires from the outside, forced off or on/off control operation can be selected by remote control. In details, refer to the installation manual attached to the unit.
- Use copper conductors only.

3D039826D


## 9 Sound data

### 9 - 1 Sound pressure spectrum

9

FXNQ20,25MA


4D034534A

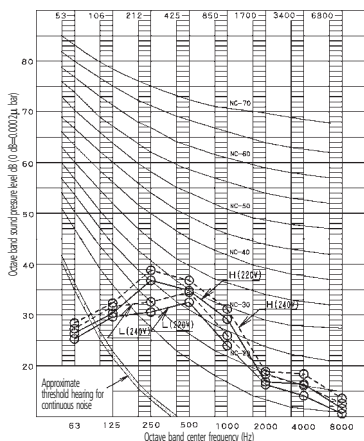

#### NOTES


- Over all (dB):  
(B, G, N is already rectified)
- Measuring place: Anechoic chamber
- Operating conditions:
  - Power source: 220•240V/220V 50/60Hz
  - JIS standard
- Location of microphone
- Operating noise differs with operation and ambient conditions.

| Scale | 220V |      | 240V |      |
|-------|------|------|------|------|
|       | H    | L    | H    | L    |
| A     | 35   | 32   | 37   | 34   |
| C     | 40   | 36.5 | 42   | 38.5 |



FXNQ32MA


4D034535A

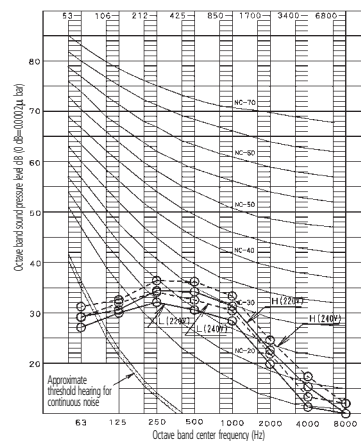

#### NOTES


- Over all (dB):  
(B, G, N is already rectified)
- Measuring place: Anechoic chamber
- Operating conditions:
  - Power source: 220•240V/220V 50/60Hz
  - JIS standard
- Location of microphone
- Operating noise differs with operation and ambient conditions.

| Scale | 220V |    | 240V |    |
|-------|------|----|------|----|
|       | H    | L  | H    | L  |
| A     | 35   | 32 | 37   | 34 |
| C     | 39   | 37 | 41   | 39 |



FXNQ40MA


4D034536A

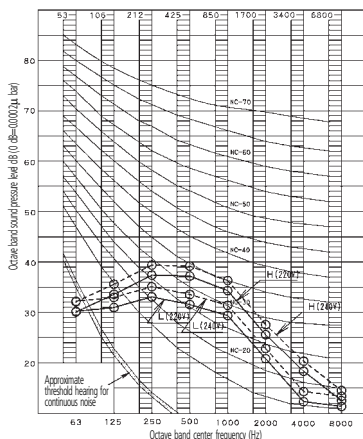

#### NOTES


- Over all (dB):  
(B, G, N is already rectified)
- Measuring place: Anechoic chamber
- Operating conditions:
  - Power source: 220•240V/220V 50/60Hz
  - JIS standard
- Location of microphone
- Operating noise differs with operation and ambient conditions.

| Scale | 220V |    | 240V |    |
|-------|------|----|------|----|
|       | H    | L  | H    | L  |
| A     | 38   | 33 | 40   | 35 |
| C     | 42   | 38 | 44   | 40 |



FXNQ50MA


4D034537A

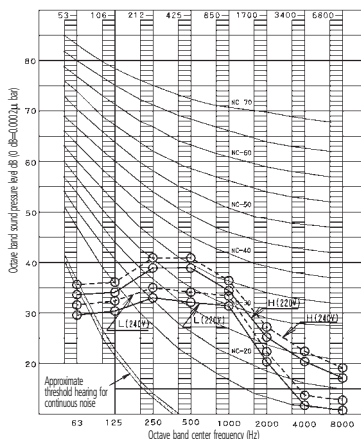

#### NOTES


- Over all (dB):  
(B, G, N is already rectified)
- Measuring place: Anechoic chamber
- Operating conditions:
  - Power source: 220•240V/220V 50/60Hz
  - JIS standard
- Location of microphone
- Operating noise differs with operation and ambient conditions.

| Scale | 220V |      | 240V |      |
|-------|------|------|------|------|
|       | H    | L    | H    | L    |
| A     | 39   | 34   | 41   | 36   |
| C     | 44   | 38.5 | 46   | 40.5 |



## 9 Sound data

### 9 - 1 Sound pressure spectrum

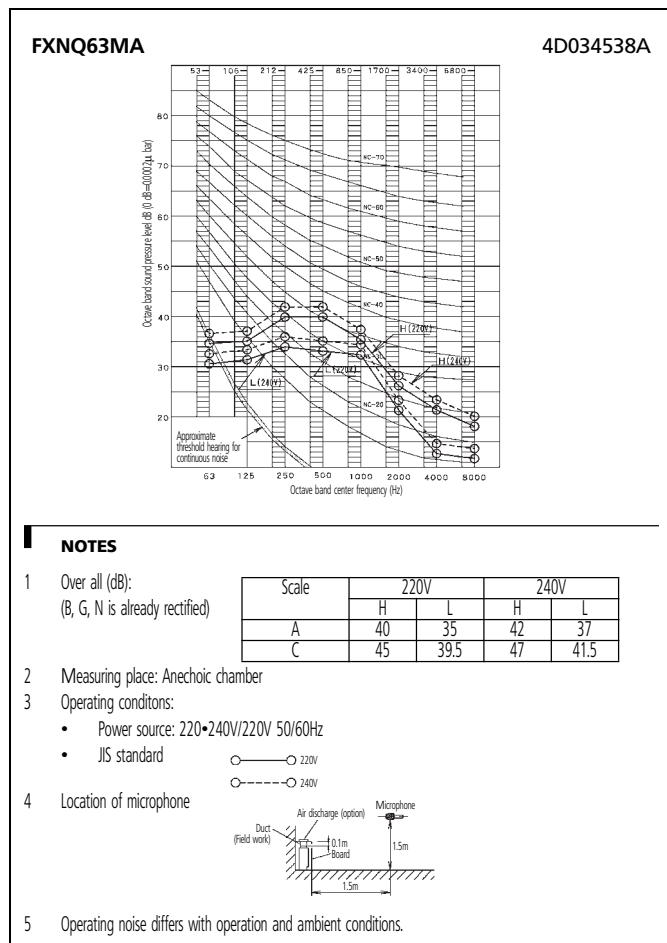


## 10 Installation

### 10 - 1 Suspension bolt pitch position


#### FXNQ-MA

- Positioning of holes for fastening to the wall

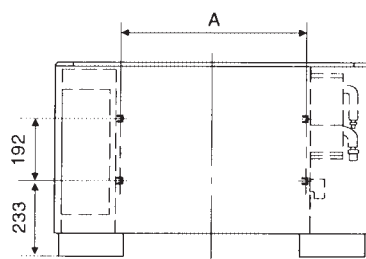

| Model       | A     |
|-------------|-------|
| FXNQ20,25MA | 590   |
| FXNQ32,40MA | 730   |
| FXNQ50,63MA | 1,010 |

- How to open/close the front panel

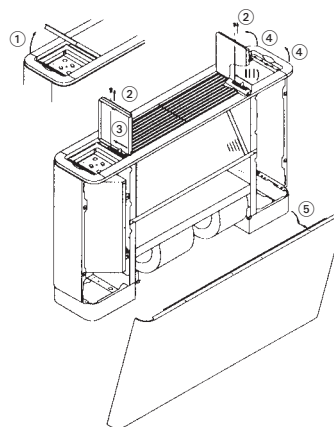


- 1 Open the lid of control panel (both left and right).
- 2 Remove screws (both left and right).
- 3 Push the knobs (both left and right) to the rear.
- 4 Lift the front of the top plate.
- 5 Lower the front panel towards the front of the unit.
- 6 To close, perform the procedure in opposite order. Pull towards the front until the knob snaps in place.

3PN86154-1-5

# 10 Installation

## 10 - 2 Service space

FXNQ-MA

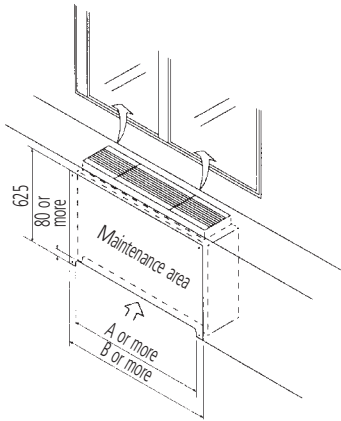

| Model       | A   | B     |
|-------------|-----|-------|
| FXNQ20,25MA | 570 | 1,030 |
| FXNQ32,40MA | 710 | 1,170 |
| FXNQ50,63MA | 990 | 1,450 |

### NOTE

- 1 Leave sufficient clearance for air inlet and maintenance.

3P086154-1-4

## 10 Installation

### 10 - 2 Service space

# 2

**VRV III-S**  
**VRV III**  
**VRV II**  
**VRV-WII**

"The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.."



ISO14001 assures an effective environmental management system in order to help protect human health and the environment from the potential impact of our activities, products and services and to assist in maintaining and improving the quality of the environment.



Daikin Europe N.V. is approved by LRQA for its Quality Management System in accordance with the ISO9001 standard. ISO9001 pertains to quality assurance regarding design, development, manufacturing as well as to services related to the product.




Daikin units comply with the European regulations that guarantee the safety of the product.

VRV products are not within the scope of the Eurovent certification programme.

Daikin equipment is designed for comfort applications. For use in other applications, please contact your local Daikin representative.

**DAIKIN EUROPE N.V.**

Zandvoordestraat 300  
B-8400 Ostend - Belgium  
[www.daikineurope.com](http://www.daikineurope.com)



EEDE06-2