



FXNQ-MA

Concealed Floor Standing Unit



BRC1E51



BRC1D52




BRC4C62



FXNQ20,25MA

- Ideal for installation beneath a window
- Long life filter fitted as standard
- Requires very little installation space, only 220mm depth
- The connecting port faces downward, eliminating the need to attach auxiliary piping

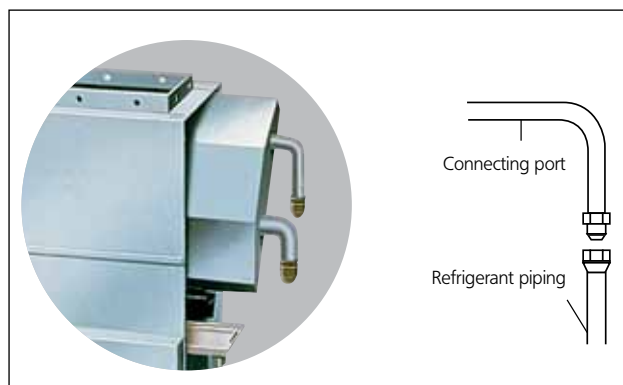

FXNQ-MA										
Indoor Units				20	25	32	40	50	63	
Capacity	Cooling		kw	2.20	2.80	3.60	4.50	5.60	7.10	
	Heating		kw	2.50	3.20	4.00	5.00	6.30	8.00	
Power input	Cooling		kw	0.049		0.090		0.110		
	Heating		kw	0.049		0.090		0.110		
Dimensions	(Height x Width x Depth)		mm	610x930x220		610x1,070x220		610x1,350x220		
Weight			kg	19		23		27		
Air Flow Rate	Cooling	High/Low	m³/min	7.00 / 6.00		8.00 / 6.00		11.00 / 8.50		
Sound Pressure	Cooling	High/Low	dBA	35.0 / 32.0		38.0 / 33.0		14.00 / 11.00 39.0 / 34.0 40.0 / 35.0		
Refrigerant				R-410A						
Power Supply				1~220-240V/50Hz						
Piping connections	Liquid (OD)/Gas/Drain (OD)		mm	6.4 / 12.7 / 21					9.5 / 15.9 / 21	