



# RXYQ16-36P7W1B



## VRV<sup>®</sup>III Inverter Heat Pump

### High COP Combination



RXQ8-10-12P7W1B

- Wide range of indoor units: 13 different models in a total of 75 variations
- Compact size of outdoor units
- Increased EER/COP
- Increased external static pressure: up to 78.4Pa
- 2 steps in night quiet mode: eg. 10HP: 58 dBA, 1st step: 54dBA, 2nd step: 45dBA
- RoHS compliant
- Easy combination with HRV
- Connectable to current Daikin control systems: DS-net, Intelligent Touch Controller, Intelligent Manager, BACnet Gateway, DMS-IF
- Easy installation thanks to automatic refrigerant charging operation, automatic test operation
- Refrigerant containment check function

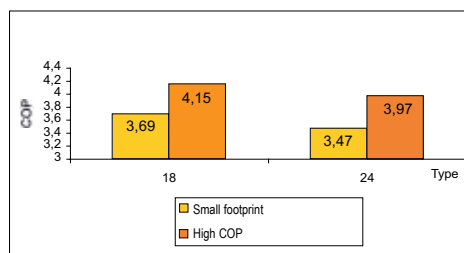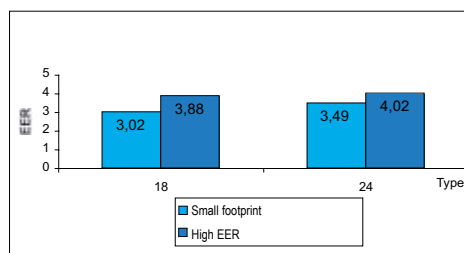

RXYQ-P	RXYQ16P7W1B	RXYQ18P7W1B	RXYQ20P7W1B	RXYQ22P7W1B	RXYQ24P7W1B	RXYQ26P7W1B	RXYQ30P7W1B	RXYQ30P7W1B	RXYQ32P7W1B	RXYQ34P7W1B	RXYQ36P7W1B
Modules	RXYQ8P7W1B	2	1			3	2	1		1	
	RXYQ10P7W1B		1	2	1		1	2	3		1
	RXYQ12P7W1B				1				2	2	3

## HEAT PUMP

RXYQ-P			16	18	20	22	24	26	28	30	32	34	36		
Capacity range		HP	16	18	20	22	24	26	28	30	32	34	36		
Capacity	Cooling	kw	44.8	50.4	56.0	61.5	67.2	72.8	78.4	84.0	89.4	95.0	101.0		
	Heating	kw	50.0	56.5	63.0	69.0	75.0	81.5	88.0	94.5	100.0	107.0	113.0		
Power input (nominal)	Cooling	kw	11.1	13.0	14.8	17.0	16.7	18.5	20.4	22.3	24.8	26.7	28.9		
	Heating	kw	11.7	13.6	15.4	17.1	18.9	19.4	21.3	23.1	24.7	26.6	28.3		
Dimensions	(Height x Width x Depth)	mm	-												
Operation Range	Cooling	Min~Max	°CDB		-5.0~43.0										
	Heating	Min~Max	°CWB		-20.0~15.0										
Refrigerant			R-410A												
Power Supply			3N~/400V/50Hz												
Max n° of indoor units to be connected			26	29	32	35	39	42	45	48	52	55	58		
Piping connections	Liquid (OD)/Gas	mm	12.7 / 28.6		15.9 / 28.6		15.9 / 34.9		19.1 / 34.9					19.1 / 41.3	
Max total length		m	1000												